



SAS[®] Studio: User's Guide

2023.05*

* This document might apply to additional versions of the software. Open this document in [SAS Help Center](#) and click on the version in the banner to see all available versions.

The correct bibliographic citation for this manual is as follows: SAS Institute Inc. 2023. *SAS® Studio: User's Guide*. Cary, NC: SAS Institute Inc.

SAS® Studio: User's Guide

Copyright © 2023, SAS Institute Inc., Cary, NC, USA

All Rights Reserved. Produced in the United States of America.

For a hard copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication, or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a), and DFAR 227.7202-4, and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.

SAS Institute Inc., SAS Campus Drive, Cary, NC 27513-2414

May 2023

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.

v_030-P1:webeditorug

Contents

Chapter 1 / Introduction to SAS Studio	1
About SAS Studio	2
SAS Studio as a Progressive Web App	4
Understanding the SAS Studio Interface	5
Using a Workspace Configuration File to Customize Your Start-up	6
Using the Navigation Pane	7
Using the Work Area	17
Searching in SAS Studio	22
Using the Console	24
Using the Background Submit Feature	25
Using the Submission Status Window	26
Using the Document Recovery Window	28
Scheduling a Program, Task, Query, or Flow as a Job	29
Using the Scheduled Jobs Window	30
Understanding Perspectives	31
Editing the Autoexec File	33
Inserting Custom SAS Code	34
Resetting Your SAS Session	35
Managing Keyboard Shortcuts	35
Changing Your Compute Context	35
Chapter 2 / Working with Programs	37
About the SAS Code Editor	38
About the Python Code Editor	38
Opening and Creating Programs	40
Using the DATA Step Debugger	56
Working with Snippets	65
Customizing the Code Editor	77
Chapter 3 / Working with Queries	79
What Is a Query?	80
Understanding the Differences between a Stand-Alone Query and a Flow Query	80
Migrating a Saved Query from an Earlier Version of SAS Studio	81
Creating a Stand-Alone Query	82
Understanding Joins	84
Selecting Data	88
Filtering Data	95
Managing Output	99
Generating a FedSQL Query	110
Chapter 4 / Working with Data	113
About the Table Viewer	113
Opening and Viewing Data	115
Viewing the Code That Is Used to Create a Table	119
Opening Data in a Task or Query from the Table Viewer	119
Refreshing Your Data	121
Sorting and Freezing Data	121
Filtering Data	122

Importing Data	126
Exporting Data	131
Chapter 5 / Working with Results and Output Data	133
Viewing Results	133
Default SAS Studio Output	134
Sending Your Results to Another User	135
Viewing Output Data	137
About the SAS Output Delivery System and SAS ODS Statistical Graphics	139
Chapter 6 / Understanding Git Integration in SAS Studio	141
About Git Integration in SAS Studio	142
Working with Git Profiles	143
Cloning and Opening a Git Repository	145
Creating a Local Repository	147
Understanding the Git Repository Tab in SAS Studio	148
Viewing the Commit History	149
Committing Changes to Your Local Repository	150
Pulling and Fetching Files	154
Pushing Files	154
Resetting Your Local Repository	155
Working with Branches in Git	155
Creating a Branch	156
Checking Out Branches	157
Understanding Merging and Rebasing	158
Merging Branches	158
Rebasing the Current Branch	159
Stashing Changes	160
Resolving Merge Conflicts	160
Deleting a Repository	162
Sample Git Workflow Scenario	163
Chapter 7 / Understanding Tasks in SAS Studio	175
What Is a Task?	175
How to Run a Task	175
Edit a Predefined Task	177
Create a Custom Task	177
Specifying the Options for the Task Code	178
Appendix 1 / Customizing SAS Studio	179
About Customizing SAS Studio	179
Creating Global Settings	180
Setting Your Preferences	182
Appendix 2 / Using the Expression Builder	195
Building an Expression	195
Appendix 3 / Text Encoding Options and Language Mappings	197
About the Text Encoding to Language Mappings	197
Text Encoding Options and Language Mappings	197
Appendix 4 / Customized Output Environment	199
Overview	199
Generate Output for Other Output Destinations	200
Send Your Results to Another Location	201
Use a Custom Style for Your Output	201

Use an Image Format Other Than the Default	201
Create a Drill-down Graph	202
Create an Animated GIF or SVG Image	202
Appendix 5 / SAS Studio Command Line	203
About the Command Line Interface	203
Commands in Standard Perspective	204
Commands in Interactive Perspective	210
Specifying the Path to the Content: SAS Content or SAS Compute	213
Appendix 6 / Transitioning to SAS Studio	215
Tips for SAS Studio 3.x Users	216
Tips for SAS Enterprise Guide Users	219
Tips for SAS Data Integration Studio Users	222
Tips for SAS Universal Viewer Users	224
Appendix 7 / Summary of SAS Studio Functionality	225
About SAS Studio Licenses	225
Summary of Flow Functionality	225
Summary of Custom Steps Functionality	231

Introduction to SAS Studio

About SAS Studio	2
SAS Studio as a Progressive Web App	4
Benefits of Using a Progressive Web App	4
Installing SAS Studio as a Progressive Web App (PWA)	4
Set a Time-Out for PWA	5
Understanding the SAS Studio Interface	5
Using a Workspace Configuration File to Customize Your Start-up	6
Using the Navigation Pane	7
About Using the Navigation Pane	7
Accessing Your Open Files	8
Using the Explorer	8
Working with Steps	10
Working with Tasks	11
Working with Snippets	11
Working with Libraries	11
Using File References	15
Working with Git Repositories	17
Customizing the Navigation Pane	17
Using the Work Area	17
About Using the Work Area	17
Creating Tabs in the Work Area	18
Accessing Recently Opened and Favorite Items	19
Customizing the Work Area	20
Rearranging the Tabs in the Work Area	21
Searching in SAS Studio	22
Using the Console	24
Using the Background Submit Feature	25
About the Background Submit Feature	25
Running a File as a Background Submission	25
Customizing Your Background Submissions	26
Using the Submission Status Window	26
Using the Document Recovery Window	28

Scheduling a Program, Task, Query, or Flow as a Job	29
Scheduling a Program, Task, Query, or Flow	29
Using the Scheduled Jobs Window	30
Understanding Perspectives	31
Editing the Autoexec File	33
Inserting Custom SAS Code	34
Resetting Your SAS Session	35
Managing Keyboard Shortcuts	35
Changing Your Compute Context	35

About SAS Studio

SAS Studio is a development application for SAS that you access through your web browser. With SAS Studio, you can access your data files, libraries, and existing programs, and you can write new programs. You can also organize your work in flows and use the predefined tasks in SAS Studio to generate SAS code. When you run a program or task, SAS Studio connects to a SAS server to process the SAS code. The SAS server can be a hosted server in a cloud environment or a remote server in your local environment. After the code is processed, the results are returned to SAS Studio in your browser.



SAS Studio supports multiple web browsers, such as Apple Safari, Google Chrome, Microsoft Edge, Microsoft Edge on Chromium, and Mozilla Firefox. For more information, see [“Web Browsers” in SAS Viya for Containers: Deployment Guide](#).

In addition to writing and running your own SAS programs, you can use the predefined tasks that are included with SAS Studio to analyze your data. The tasks are based on SAS procedures and provide access to some of the most commonly used graph and analytical procedures. You can also use the default task template to write your own tasks.

SAS Studio includes two different perspectives: the Standard perspective and the Interactive perspective. A *perspective* is a predetermined set of features that is customized to meet the needs of a specific user type. By selecting a specific perspective, you can narrow the choices that are available in the interface and focus on the features that you need to use regularly. By default, when you open SAS Studio, the Standard perspective is selected. After you open SAS Studio, you can change the perspective by using the **Options** menu on the toolbar. For more information, see [“Understanding Perspectives” on page 31](#).

SAS Studio as a Progressive Web App

Benefits of Using a Progressive Web App

Using SAS Studio as a Progressive Web App include the following benefits:

- Application persistence – When you access SAS Studio as a PWA from the Windows Start menu, your session will never time out. When you access SAS Studio through a web browser, your session will time out after a period of inactivity and you will be logged out. For more information, see [“Set a Time-Out for PWA” on page 5](#).
- Performance – When installed as a PWA, SAS Studio typically starts faster than when it is accessed in the browser.
- Desktop experience – Installing SAS Studio as a PWA confers all the benefits of a traditional installation. You can launch SAS Studio from the **Start** menu or Taskbar, and you do not need to sort through countless tabs to find the correct instances of SAS Studio.
- Renaming – You can rename each PWA instance to quickly access different environments such as development, test, or production servers.

Installing SAS Studio as a Progressive Web App (PWA)

SAS Studio must be deployed with TLS and HTTPS enabled.

To install SAS Studio as a PWA:

- 1 Open another SAS application, such as SAS Drive or SAS Visual Analytics, in a Chromium-based web browser.
- 2 Open the web browser’s **More** menu and select **Install SAS**.

The SAS application is now installed as a desktop program named **SAS**. After one web application has been installed as a PWA, all other SAS applications, including SAS Studio, are accessible in the PWA.

Note: The **Install SAS** button is not available in Chrome when you start SAS Studio by navigating directly to the URL for your site or when SAS Studio is set as the initial screen in your SAS Drive settings.

To uninstall the PWA for SAS Studio:

- 1 Open the PWA for SAS Studio.

- 2 On the PWA menu, select **Uninstall SAS**.

Set a Time-Out for PWA


To specify a time-out for a PWA, your SAS administrator sets these configuration properties in SAS Environment Manager:

- the `EnablesPWATimeout` configuration property. For more information, see [“HTML Clients” in SAS Viya Platform: Configuration Reference](#).
- the `sas.studio.pwaSessionTimeout` configuration property. For more information, see [“General Configuration Properties” in SAS Studio: Administrator’s Guide](#).

Understanding the SAS Studio Interface

When you sign in to SAS Studio, the Start Page is available, so you can quickly get started writing a new SAS program, building a flow, importing data, or creating a query. Use the icons to access the different sections of the navigation pane.

Note: To sign out of SAS Studio, click the button with the first initial of your user name on the far right of the application toolbar and select **Sign out**. Do not use the Back button on your web browser.

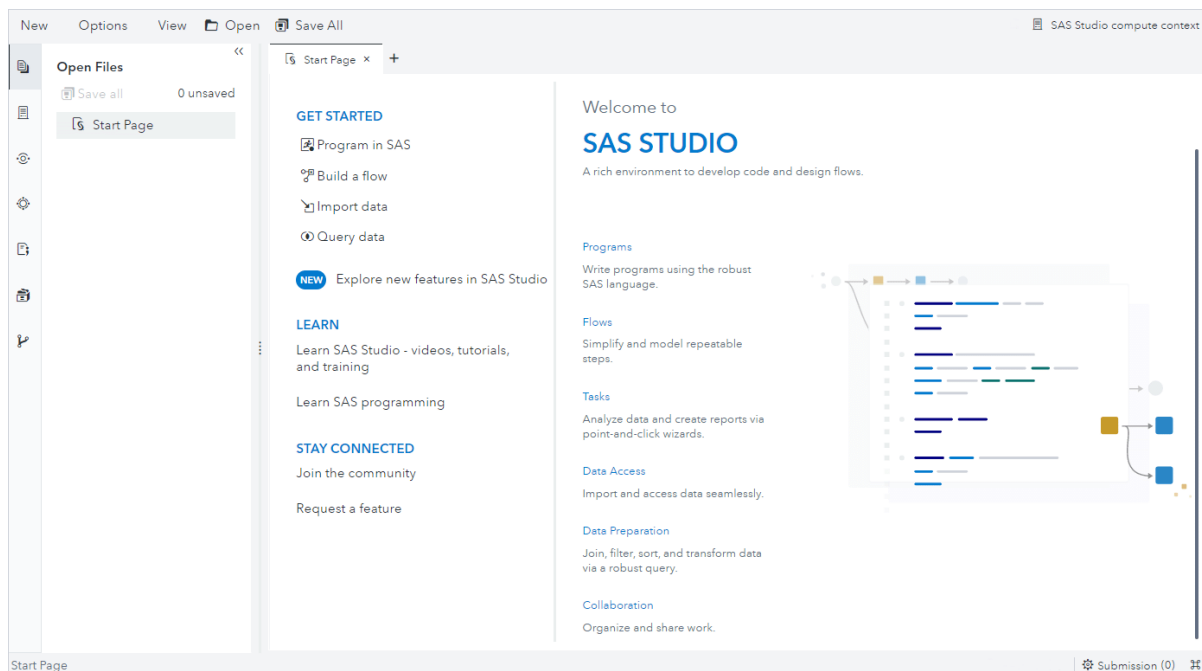

At the top, the application bar enables you to access other SAS applications. Click the search icon to search for items across SAS applications.

The main window of SAS Studio consists of a navigation pane on the left and a work area on the right. The navigation pane provides easy access to your open files, your folder shortcuts, file system and SAS content, steps, your tasks and snippets, the libraries that you have access to, your Git repositories, and your file references. The **Open Files** section is displayed by default. The **File References** section is not displayed by default, but can be opened by selecting **View** ⇒ **Navigation panes** ⇒ **File References**. For more information, see [“Using File References” on page 15](#).

The work area is used to display your data, code, tasks, logs, results, and flows. As you open these items, they are added to the work area as windows in a tabbed interface. When you first open SAS Studio, the **Start Page** tab is displayed in the work area by default. For more information, see [“Using the Work Area” on page 17](#).


Using a Workspace Configuration File to Customize Your Start-up

You can create a workspace configuration file that specifies one or more files to open in the SAS Studio session on start-up.

- 1 Select **New** ⇒ **More file types** ⇒ **Workspace**.
- 2 In the code editor, enter the JSON code to specify the files that you want to open. The path must include whether the file is in SAS Content or on the SAS server (for example, `sascontent:/path/to/filename` or `sasserver:/path/to/filename`).

In this example, you want the `air.csv` file and the `air.flw` to open when the SAS Studio session starts.

```
{
  "openfiles":[
    {"path": "sascontent:/Users/userID/My Folder/Import/air.csv"},
    {"path": "sasserver:/data/flow/air.flw"}
  ]
}
```

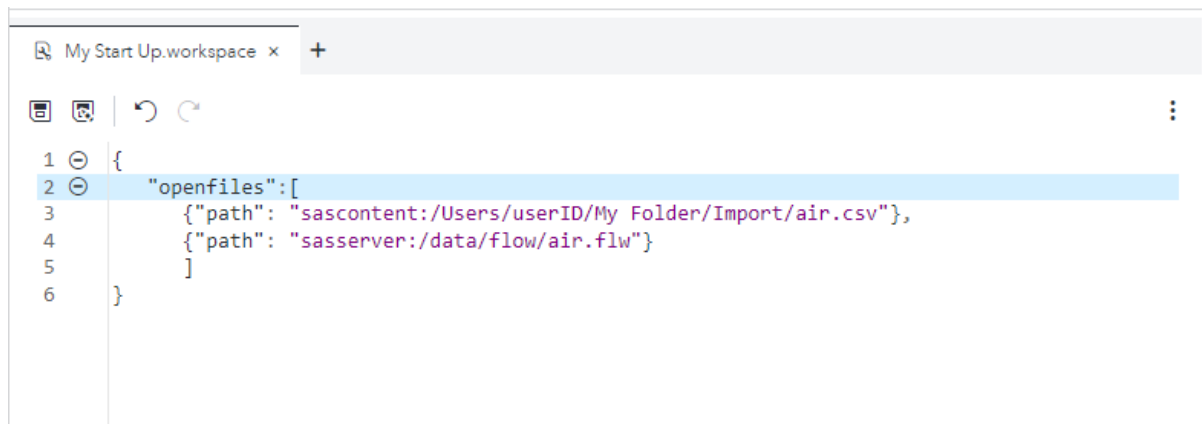

```
My Start Up.workspace x +
{
1  {
2  "openfiles":[
3    {"path": "sascontent:/Users/userID/My Folder/Import/air.csv"},
4    {"path": "sasserver:/data/flow/air.flw"}
5  ]
6  }
```

- 3 Save the workspace configuration file to your SAS Content or to the SAS server.

After the workspace configuration file is created, you must select this workspace configuration file in either of these ways:

- by setting the **Load a workspace configuration file** option in your preferences. For more information, see [“Setting the Start-Up Preferences” on page 182](#).
- by using this URL parameter: `sas-studio-workspace=path`. The path must include whether the file is in SAS Content or on the SAS server (for example, `sascontent:/path/to/filename` or `sasserver:/path/to/filename`).

Note: If you specify a workspace configuration file in your preferences and you use a URL parameter, the URL parameter value is used.

When you use a workspace configuration file, any file paths that you reference in the workspace configuration file override the settings of the **Tabs to Open** option. Here are some examples.


- Even if the **Tabs to Open** option is set to **None**, any files that are referenced in the workspace configuration file still open in a new tab at start-up.
- If the **Tabs to Open** option is set to **Restore tabs listed in Open Files**, only the files that are referenced in the workspace configuration file are opened at start-up. No files are restored.
- If the **Tabs to Open** option is set to **Open a new file**, only the files that are referenced in the workspace configuration file are opened at start-up. A new file is not opened.

Using the Navigation Pane

About Using the Navigation Pane

You can expand the sections of the navigation pane by clicking the section that you want to view. To close and reopen the navigation pane, click a section icon twice.

You can use the **Display labels on application navigation pane** option to display labels with the icons in the navigation pane. For more information, see [“Setting General Preferences” on page 183](#).

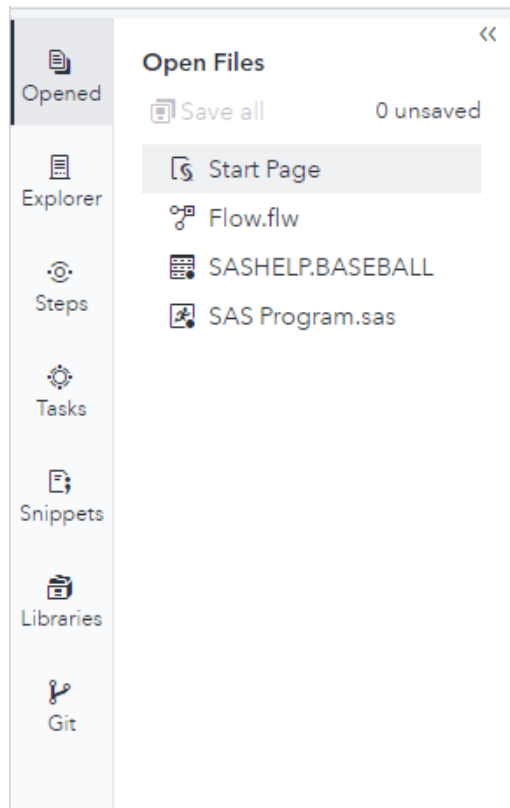

Accessing Your Open Files

The **Open Files** section of the navigation pane enables you to quickly view and access all of the files that you have opened in your current SAS Studio session. To access a file from the list of open files, click the file that you want to view. You can save changes to all files in the list by clicking **Save all**.

You can also use the **Open Files** section to add an open program to the active flow by right-clicking the program file and selecting **Add to flow**. This option is available only for programs and only if there is an active flow in the work area.

Using the Explorer

The **Explorer** section in the navigation pane enables you to access files and folders from your folder shortcuts, your server file system, and your SAS Content Server locations. For users of SAS Studio 2020.1 and later, the default file storage location is SAS Content. SAS Content locations are integrated with other applications on the SAS Viya platform, such as SAS Drive, so that you can seamlessly share files among the applications and with other SAS users. For more information, see [SAS Drive: Getting Started](#).

If you also need access to a file system to perform other tasks, such as working with a Git repository, your Kubernetes and SAS Studio administrators can create access to the file system during deployment. In SAS Studio 5.x, by default, you had access


to both SAS Content and file system storage locations. For more information, see [“Creating Persistent File Storage” in SAS Studio: Administrator’s Guide](#).

Note: The ability to access files on a SAS Content Server is available only in SAS Studio 5.1 or later. For more information, contact your site administrator.

The **Explorer** section includes a My Favorites folder that you can use to quickly access the files that you add to it. You can add many types of files to your My Favorites folder, including SAS data sets, other data files, programs, flows, snippets, tasks, and queries.

- To add a file to your My Favorites folder, right-click the file in the appropriate section of the navigation pane and select **Add to My Favorites**.



Note: You can access recently opened and favorite items from the Start Page tab. For more information, see [“Accessing Recently Opened and Favorite Items” on page 19](#).

- To remove a file from your My Favorites folder, right-click the file in the appropriate section of the navigation pane and select **Remove from My Favorites**. You can also select the file in the My Favorites folder and click .

You can use the **Explorer** section to create folders and folder shortcuts as well as download and upload files. From the folders tree, you can expand and collapse folders; copy, move, and rename files and folders; and open items in folders by double-clicking them or dragging them to the work area. In addition, you can open files from your folders and folder shortcuts by clicking **Open** on the SAS Studio toolbar.

Note: If you want to drag an item to another location in the **Explorer** section when there is a scroll bar, drag the item to the upper right or lower right corner of the pane to scroll upward or downward.





You can change the files that are displayed in the **Explorer** section in the following ways:


- To display only SAS program files, click  and select **Show .sas files**.
- To display only SAS log files, click  and select **Show .log files**.


You can view a file as text by right-clicking the file and selecting **View file as text**.

To open a file as a SAS program, right-click the file and select **Open as program**.

To create a folder shortcut:



- 1 Click  in the navigation pane to open the **Explorer** section. Next, click  and select **Folder shortcut**.
- 2 In the **Name** box, enter the name of the folder shortcut.
- 3 Click  to select a folder. To create a folder, click .
- 4 Click **OK** to create the folder shortcut. The new shortcut is added to the list of folder shortcuts.

Note: You can rename a folder shortcut by selecting the folder shortcut in the **Explorer** section and clicking . In the Shortcut Properties window, enter a new name in the **Name** box.

To create a folder, select the folder in the **Explorer** section in which you want to create the folder. Click  and select **Folder**. Enter the name of the new folder. The new folder is added to the list of folders.

To download one or more files, right-click the files that you want to download and select **Download file**.

Note: You can download a flow only from a SAS Compute Server folder. You cannot download a flow from SAS Content.

To upload one or more files from your local computer, select the folder to which you want to upload the files and click . Click  to browse for the files that you want to upload. The maximum size of each uploaded file cannot exceed 100 MB.

Note: You can sort the files that are listed in the **Explorer** section by right-clicking the folder that you want to sort and selecting **Sort by**. You can sort the files by name, modified date, or size or choose no sort order. By default, the files are sorted in ascending order by file name.

Working with Steps

The **Steps** section of the navigation pane enables you to access the predefined steps and the custom step interface in SAS Studio. You can add steps to a flow to build a sequence of operations on data. Steps are represented as nodes in the flow. Flows are designed to enable you to manage complex processes by creating a generalized flow of data without hardcoding references to tables, columns, and operations ahead of time.


For example, if you know that your flow is going to contain a query that generates an output table that you want to use as input in a program, you could start by adding a Query node, a Table node, and a SAS Program node to your flow. After you have defined the steps in the flow, you can use the node properties for each node to specify the attributes and content of the node.

For more information, see [“What Is a Flow?” in SAS Studio: Working with Flows](#).

Note: You can also add existing files, such as SAS programs, SAS data sets, snippets, and external files that are valid as input to an Import node, to a flow by dragging them from different sections of the navigation pane.

Working with Tasks

The **Tasks** section of the navigation pane enables you to access tasks in SAS Studio. Tasks are based on SAS procedures and generate SAS code and formatted results for you. SAS Studio is shipped with many predefined tasks that you can run. You can also edit a copy of most of these predefined tasks, and you can create your own new tasks.

To create a task, click  and select **Task**. SAS Studio creates a template in the work area that you can use to create custom tasks for your site. Custom tasks can be accessed from the My Tasks folder or from the **Explorer** section of the navigation pane. For more information, see [“Create a Custom Task” on page 177](#).

To edit a task that you have created, right-click the task in the My Tasks folder and select **Edit task template**. The XML code that is used to create the task is opened in the work area. If you want to edit a predefined task, you must first right-click the task and select **Copy as Task Template** and then select either **My Tasks** or **Explorer**. For more information, see [“Edit a Predefined Task” on page 177](#).

Working with Snippets

The **Snippets** section in the navigation pane enables you to access your saved snippets. Snippets are lines of commonly used code or text that you can save and reuse. Snippets can contain SAS code, XML code, and text. You can insert snippets in locations including the Program Editor, XML editor, text editor, job definitions, job forms, and job prompts. To insert a snippet, right-click the location where you want to insert the snippet and select **Insert snippet**.


SAS Studio is shipped with predefined code snippets that you can use. You can also edit a copy of these snippets and create your own custom snippets. Your custom snippets can be accessed from the My Snippets folder. For more information, see [Chapter 2, “Working with Programs,” on page 37](#).


To edit a snippet that you have created, right-click the snippet and select **Edit**. If you want to edit a predefined snippet, you must first right-click the snippet and select **Copy snippet to**, and then select either **My Snippets** or **Explorer**.

Note: You can edit only the snippets that are in the **My Snippets** folder or a folder that you can access from the **Explorer** section.

Working with Libraries

The **Libraries** section of the navigation pane enables you to access your SAS libraries. SAS tables are stored in SAS libraries. Your libraries are grouped into Connected Libraries and Disconnected Libraries root nodes depending on whether the library is connected to its data source.

Note: Disconnected libraries are not displayed by default. To display your disconnected libraries, click .

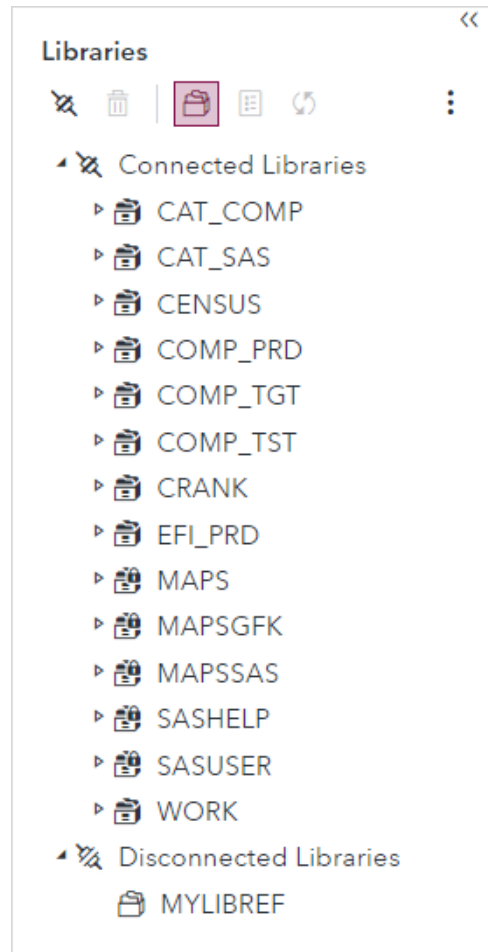





Note: The Sasuser library is read-only, as in any SAS server environment. You cannot save content to this library.

From the **Libraries** section, you can open SAS tables and add them to your programs. You can use the **Libraries** section to expand a table and view the columns in that table. The icon in front of the column name indicates the type.



Note: Table names that include { } (braces) appear as blank. Do not use { } in table names.

Here are examples of common icons for the column types.


Icon	Type of Column
	Character
	Numeric

Icon	Type of Column
	Date
	Datetime

You can perform the following actions in the **Libraries** section:

- To add tables or columns to a program, drag the item from the **Libraries** section to the program. SAS Studio adds the names of the dragged items to your program. The cursor changes as you drag an item to indicate when you can drop the item to insert it in the program. If the item name is a reserved word in a database, SAS Studio creates a name literal by automatically adding quotation marks and a lowercase letter n to the item name. For more information, see [“Opening and Creating Programs” on page 40](#).
- To refresh all of the libraries and tables in the **Libraries** section, select  > **Refresh**. To refresh an individual table or library, right-click the table or library and select **Refresh**.
- To view the properties of a connected library, select the library in the **Libraries** section and click .
- To sort the table columns in the **Libraries** section, right-click the table and select **Sort**. You can sort the columns in ascending, descending, or data order. By default, the columns are sorted in data order. Sorting the columns in the **Libraries** section does not affect how the columns are displayed in the table viewer.
- To connect or disconnect a library, right-click the library and select **Connect library** or **Disconnect library**.

.....
Note: Pre-assigned libraries cannot be disconnected.

- To toggle the display of disconnected libraries, click  on the **Libraries** section toolbar.
- To edit a library that you have created, right-click the library and select **Edit connection**.

.....
Note: Pre-assigned libraries cannot be edited.

To create a library:

- 1 Open the **Libraries** section by clicking  in the navigation pane, and then click .

New Library Connection

Connection name: *

My Library

Library name (libref): *

MyLibRef

Library type:

Cloud Analytic Services engine

Assign and connect to data sources at startup ⓘ

Allow all users to view the library connection ⓘ

Add as disconnected

Add as connected

Properties Connection Options

Library attributes: ⓘ

READONLY

UUID macro variable name: ⓘ

Save and connect Save Cancel

- 2 In the **Connection name** box, enter a descriptive name for the library connection.
- 3 In the **Library name (libref)** box, enter the libref for the library.

.....

Note: Caslib names cannot be longer than 256 characters. SAS librefs are limited to eight characters.

.....

- 4 In the **Library type** box, select the SAS library engine that you want to use. The library engines that are available depend on your deployment.

.....

Note: To create a library that uses the specified library type, you must have both the library engine and the appropriate client software installed.

For information about using the SAS Base Engine library type, see [SAS V9 LIBNAME Engine: Reference](#).

.....

- 5 If you want to access this library each time you use SAS Studio, select **Assign and connect to data sources at startup** to add the LIBNAME statement to your autoexec.sas file.
- 6 If you have administrator privileges and want to make this library available to all users of the current compute context, select **Allow all users to view the library connection**. You can choose whether the library is added as a connected or disconnected library. The library is disconnected by default.

.....

Note: This option is available only if you are authorized to update the current compute context.

.....

- 7 Use the **Properties** and **Connection Options** tabs to specify the configuration and connection options that you need. For help with the specific options, see the documentation for your library engine.
- 8 To test whether the connection to the new library is valid, click **Test connection**. If the connection fails, click **Show details** to view the log and error messages.

.....

Note: You cannot test the connection to a library if you are using the Interactive perspective.

.....

- 9 To save and connect the library, click **Save and connect**. To save the library without connecting it, click **Save**. The new library is added to the list of libraries in the navigation pane.

TIP You can edit a library that you have created by right-clicking the library in the **Libraries** section of the navigation pane and selecting **Edit connection**.

Using File References

File references enable you to quickly access files that you specify. You can create a file reference to a file on your SAS file system, a file from your SAS Content folder, or a file that you access via a URL.

.....

Note: You can also use the FILENAME statement to create a file reference to a file in a remote location that is accessible by your SAS server.

.....

To create a file reference to a file on your SAS file system, a file from your SAS Content folder, or a file that you access via a URL:

- 1 Click  in the navigation pane, and then click .

Note: If the File References button is not available in the navigation pane, select **View** ⇒ **Navigation panes** ⇒ **File References**.

- 2 In the **Name** box, enter the file reference name.
- 3 Use the **Access method** box to specify how to access the file:
 - **DISK** - accesses the file from your SAS file system. In the **Location** box, browse to find the file that you want to use.
 - **FILESRV** - accesses the file from your SAS Content folder. In the **Location** box, browse to find the file that you want to use.
 - **URL** - accesses the file by using the specified URL. In the **URL** box, enter the URL for the file.
- 4 If you want this reference to be available the next time you use SAS Studio, select **Re-create this file reference at start-up**.
- 5 Click **OK** to create the file reference. The new file reference is added to the list of file references in the navigation pane.

You can also create a file reference to a file on your SAS file system (DISK), a file from your SAS Content folder (FILESRV), or a file that you access via a URL (URL) programmatically. The file reference is displayed in the File References pane. You can open a file or URL from a file reference by double-clicking it or dragging it to the work area.

Here is some sample code:

```
FILENAME MyProg FILESRVC folderpath='/Users/userid/'
filename="MyProgram.sas";
FILENAME MyURL URL 'http://www.sas.com';
FILENAME SASPROG '/sastest/General_Test/MyProgram.sas';
```

Working with Git Repositories

The **Git Repositories** section in the navigation pane enables you to access Git features from within SAS Studio. These features include cloning repositories, committing and stashing file changes, pulling and pushing files, viewing your repository history, creating and merging branches, rebasing a branch, and performing a basic differentiation between files in your local repository. For more information, see [“About Git Integration in SAS Studio” on page 142](#).

Customizing the Navigation Pane

To customize which sections of the navigation pane are displayed, click **View** and select **Navigation panes**. Select or clear any sections that you want to add or remove. The navigation pane is updated immediately.


Note: The **File References** section is not displayed by default.

Using the Work Area

About Using the Work Area

The work area is the main portion of the SAS Studio application for accessing programs, tasks, and flows and for viewing data. The work area is always displayed and cannot be closed. When you open a program, task, table, or flow, the windows open as new tabs in the work area. The code, log, and results that are associated with programs and tasks are grouped together under the main tab for the program or task.

When you first open SAS Studio, the **Start Page** tab is displayed in the work area by default. The Start Page provides quick access to a few basic tasks (for example, creating a program or query) and links to learning resources. If you close the **Start Page** tab, you can re-open it by selecting **View** ⇨ **Start Page**. You can use the **Show Start Page** option to control whether to display the **Start Page** tab each time you start SAS Studio. For more information, see [“Setting the Start-Up Preferences” on page 182](#).

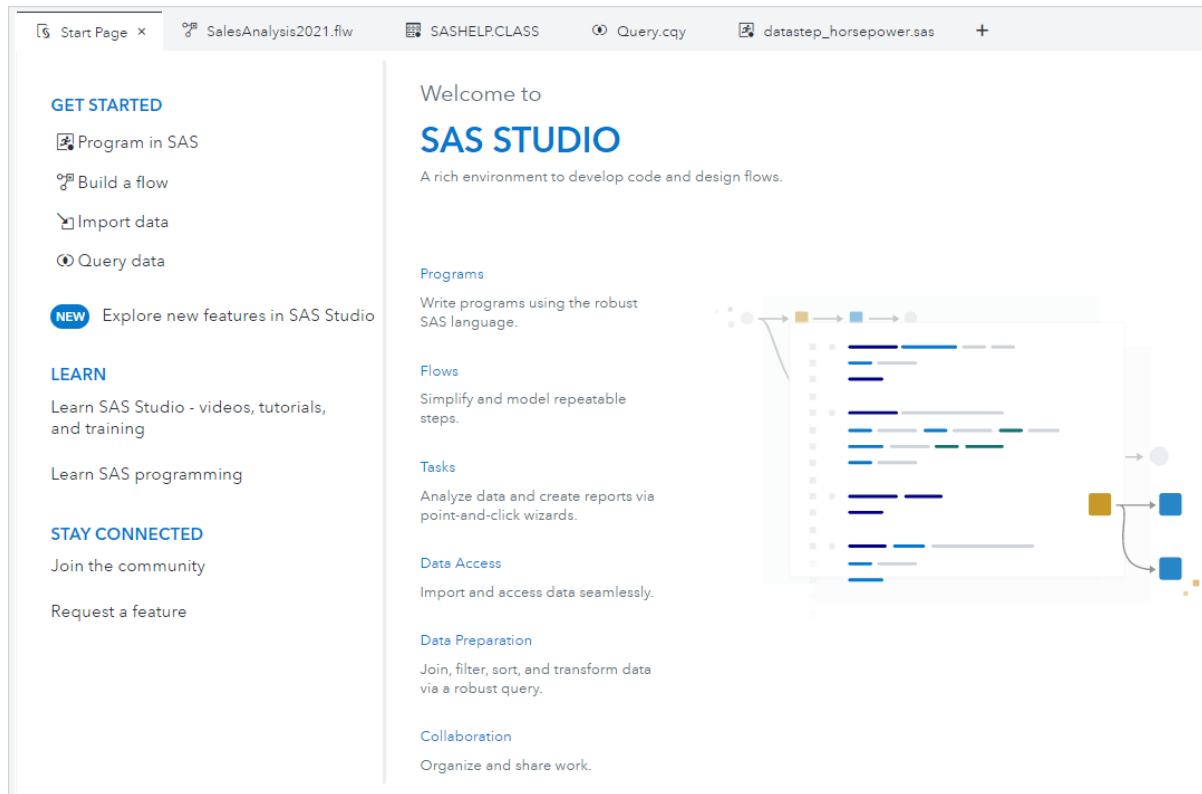

Creating Tabs in the Work Area

You can create a tab in the work area by clicking **+** beside the most recently opened tab and selecting the type of tab you want to open.

The screenshot shows the SAS Studio interface with a data table. The table has 16 rows and 5 columns: Name, Sex, Age, and Weight. A context menu is open over the table, listing various actions that can be performed on the data.

	Name	Sex	Age	Weight
1	Alfred	M	14	112.5
2	Alice	F	13	84
3	Barbara	F	13	98
4	Carol	F	14	102.5
5	Henry	M	14	102.5
6	James	M	12	57.3
7	Jane	F	12	59.8
8	Janet	F	15	62.5
9	Jeffrey	M	13	62.5
10	John	M	12	59
11	Joyce	F	11	51.3
12	Judy	F	14	64.3
13	Louise	F	12	56.3
14	Mary	F	15	66.5
15	Philip	M	16	72
16	Robert	M	12	64.8


Accessing Recently Opened and Favorite Items

SAS Studio keeps track of your recently opened and saved items and items that you mark as favorites. If you have recently opened or saved items in the work area or have added some items to your Favorites folder, the Start Page welcome graphic is replaced with a list of your recent, saved, and favorite items.

Note: For information about adding items to your My Favorites folder, see [“Using the Explorer”](#) on page 8.

You can use the Recents and Favorites lists to perform the following actions:

- You can open an item from either list by double-clicking the item or by right-clicking the item and selecting **Open**.
- You can add an item from the Recents list to your My Favorites folder by right-clicking the item and selecting **Add to My Favorites**.
- You can clear one or all items from the Recents list by right-clicking the item and selecting **Clear** or **Clear all**.
- You can remove an item from your My Favorites folder by right-clicking the item in the Favorites list and selecting **Remove from My Favorites**.

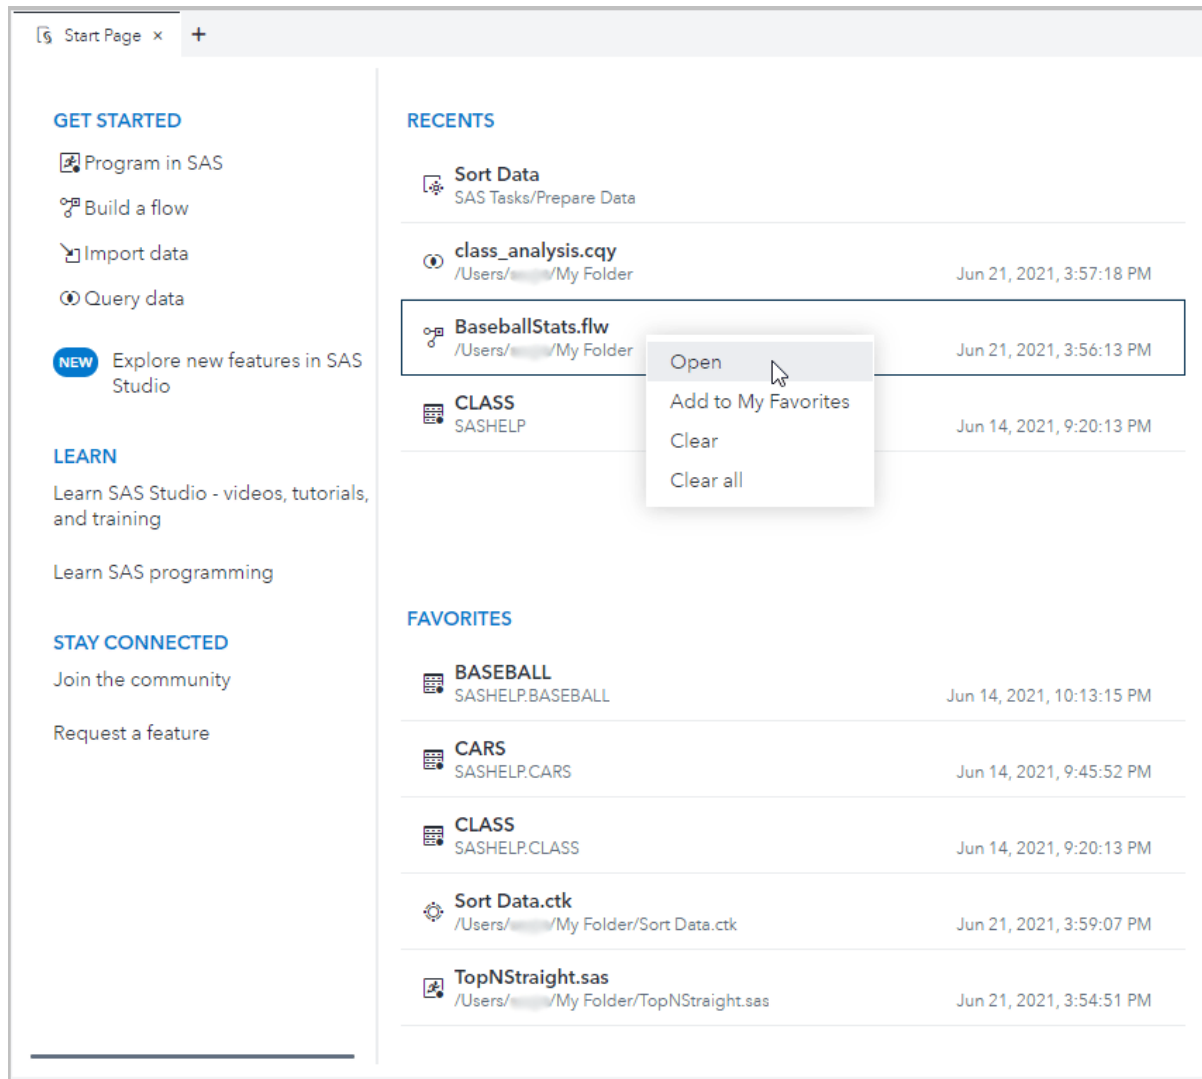

Note: The Recents list is not shared between perspectives. Each perspective has a separate Recents list. For more information, see [“Understanding Perspectives” on page 31](#).

Customizing the Work Area

By default, the work area is displayed beside the navigation pane, but you can maximize the work area and hide the navigation pane. You can also close all of the tabs in the work area at once.

To maximize the work area, select **View** ⇌ **Fullscreen**.

Note: To reopen the navigation pane, click **Restore** to the right of the tabs. You can also double-click any tab in the work area or right-click a tab and select **Restore**.

You can also close some or all of the open tabs in the work area. To close all tabs that are open in the work area, right-click any tab and select **Close all**. To close all tabs except the active tab, right-click the active tab and select **Close others**. You are prompted to save any unsaved programs or tasks.


Rearranging the Tabs in the Work Area


In the work area, you can rearrange the tabs by dragging them to the left or right. You can also create separate vertical and horizontal groups and move tabs between the groups. To rearrange a tab, right-click the tab that you want to move and select the appropriate option.

The screenshot shows the SAS Work Area interface. At the top, there are several tabs: Start Page, TopNCategories.sas, Flow.flw, Query.cqy, and SASHELP. Below the tabs, there is a search bar with the text "Enter expression". The main area displays a table with 15 rows and 5 columns. The columns are labeled Name, Sex, Age, and Weight. The table data is as follows:

	Name	Sex	Age	Weight
1	Alfred	M	14	
2	Alice	F	13	
3	Barbara	F	13	
4	Carol	F	14	
5	Henry	M	14	63.5
6	James	M	12	57.3
7	Jane	F	12	59.8
8	Janet	F	15	62.5
9	Jeffrey	M	13	62.5
10	John	M	12	59
11	Joyce	F	11	51.3
12	Judy	F	14	64.3
13	Louise	F	12	56.3
14	Mary	F	15	66.5
15	Philip	M	16	72

A context menu is open over the table, showing the following options: Close, Close others, Close all, Fullscreen, New vertical tab group, New horizontal tab group, Move next, and Move previous. The "New vertical tab group" option is currently selected.

In the Standard perspective, you can change the layout of a program tab by displaying the **Log**, **Results**, and **Output Data** subtabs in a single group with the **Code** subtab split vertically or horizontally. To change the layout, click  and **Tab layout**. Then, select the appropriate option.

In the Interactive perspective, you can display the **Log**, **Results**, and **Output Data** subtabs as a separate vertical or horizontal tab group. To change the layout, click  and select the appropriate option.

The screenshot shows the SAS Studio interface. The top pane contains SAS code for a data step. A context menu is open over the code editor, showing options for splitting the editor: Single, Vertical split, and Horizontal split (which is selected). The bottom pane shows the results of the execution, including a table titled "Automakers with the most Models, by Origin".

```

12 %let data=SASHELP.CARS;
13 %let report=Make;
14 %let n=10;
15 %let category=Origin;
16
17 title "Automakers with the most Models, by Origin";
18 footnote;
19
20 data work._tpnview / view=work._tpnview;
21 set &data;
22 _tpncount=1;
23 label _tpncount='Count';


```


Origin	Rank	Make	Count
Asia	1	Toyota	28
	2	Honda	17
	3	Nissan	17
	4	Mitsubishi	13
	5	Hyundai	12
	6	Kia	11


Searching in SAS Studio


You can use the Search feature to search all of the sections of the navigation pane, including both your SAS Content and your SAS server folders. You can specify which sections and which types of items you want to include in your search. You can also specify whether you want the search to be case-sensitive and match whole words only.


To access the Search feature, select **View** ⇒ **Search**.

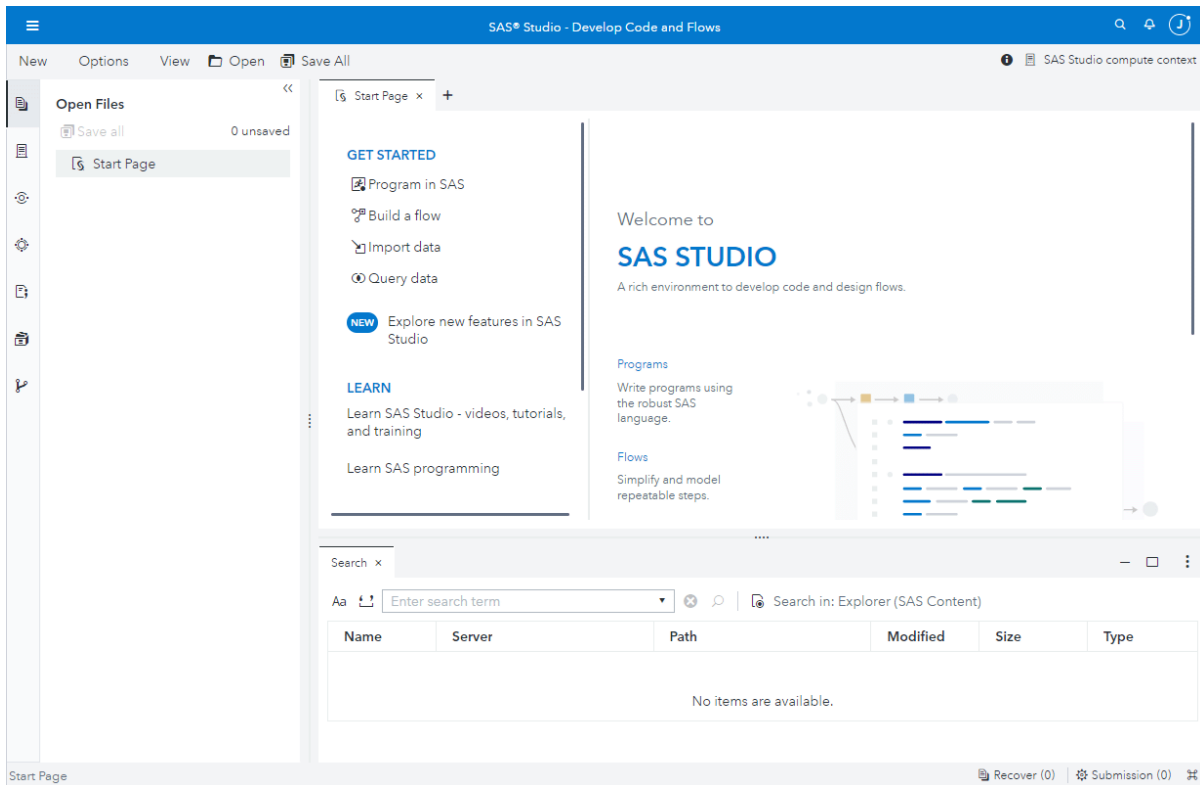


To search for an item, enter the text that you want to search for in the search term box. To specify the areas of the navigation pane to search, click . By default, SAS Studio searches your SAS Content user directory in the **Explorer** section of the navigation pane.

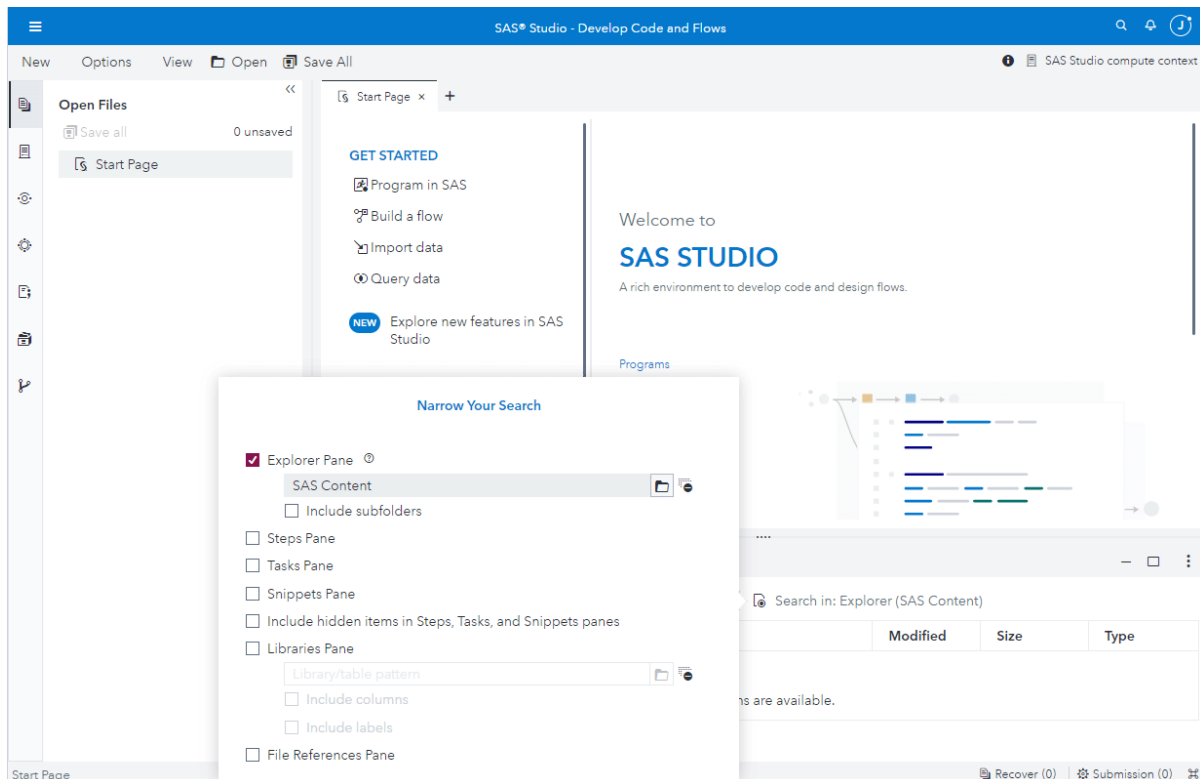



To make your search case-sensitive, click **Aa**. To match the whole word in your search, click .

When you have specified your search criteria, click . You can open items in the search results by double-clicking them.

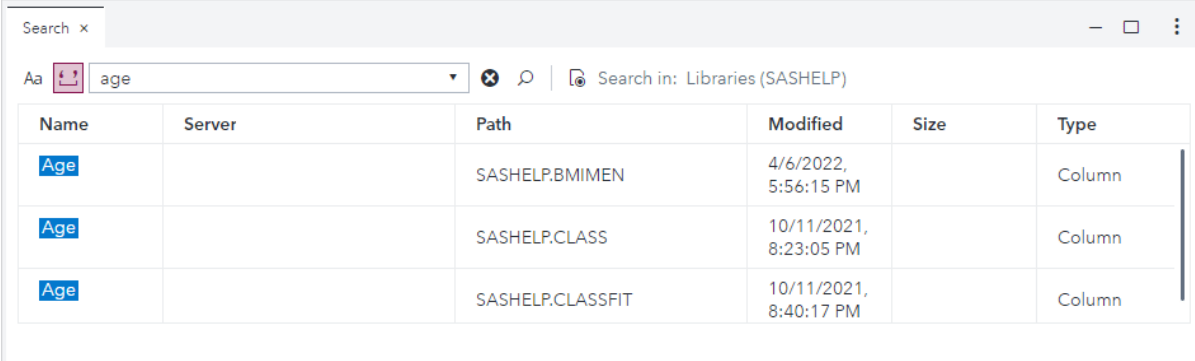

Name	Server	Path	Modified	Size	Type
Age		SASHELP.BMIMEN	4/6/2022, 5:56:15 PM		Column
Age		SASHELP.CLASS	10/11/2021, 8:23:05 PM		Column
Age		SASHELP.CLASSFIT	10/11/2021, 8:40:17 PM		Column

Using the Console

The Console window displays a list of all of the messages, such as error messages and warnings, that are generated as you run programs and tasks. To open the console, select **View** ⇒ **Console**. If you minimize the console tab, you can click  in the lower right corner of the work area to restore the console or  to maximize the console.

You can use the buttons at the top of the window to filter the types of messages that are displayed. By default, all types of messages are displayed. The messages are cleared by default when you sign out of SAS Studio. You can manually clear the messages from the console by clicking **Clear All**.

The screenshot shows the SAS Studio interface with the following components:

- Toolbar:** Run, Cancel, Copy to My Tasks, and a notification icon showing (0).
- Data Pane:** SASHELP.BASEBALL selected, Filter: (none).
- Roles Pane:** List variables: Name, Team, nAtBat, nHits.
- Code Pane:** The Print Procedure, Data Set SASHEL...
- Results Pane:** List Data for SASHELP.BASEBALL table.


Obs	Player's Name	Team at thi
1	Allanson, Andy	Cleveland
2	Ashby, Alan	Houston
3	Davis, Alan	Seattle
4	Dawson, Andre	Montreal
5	Galarraga, Andres	Montreal
6	Griffin, Alfredo	Oakland
7	Newman, Al	Montreal
8	Salazar, Argenis	Kansas City
9	Thomas, Andres	Atlanta
- Console Pane:**
 - All | Errors | Warnings | Info | Logs | Debug | Clear All
 - datastep_horsepower.sas submitted
 - datastep_horsepower.sas completed successfully
 - datastep_horsepower.sas elapsed time 3.497 seconds
 - List Data.ctl submitted
 - List Data.ctl completed successfully
 - List Data.ctl elapsed time 4.259 seconds

Using the Background Submit Feature

About the Background Submit Feature

You can run a saved program, query, task, or flow as a background submission, which means that the file can run while you continue to use SAS Studio. You can view the status of files that have been submitted in the background, and you can cancel files that are currently running in the background.


Running a File as a Background Submission


To run a file as a background submission, right-click the file in the navigation pane and select **Background submit** or click  in the toolbar. Before the file is run, the







background process changes the current working directory to the directory in which the program is located.

By default, a notification message is displayed when the file is submitted and again when the file has finished running. If you log off from SAS Studio while the file is running, the file continues to run, but the notification message that indicates when the file is finished is not displayed.

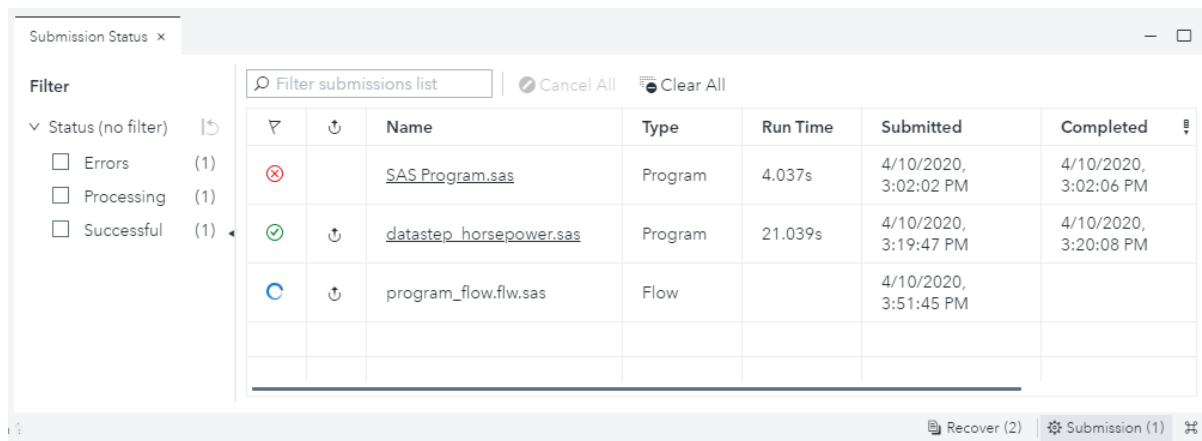Note: Because a background submission uses a separate compute server, any libraries or tables that are created by the submission do not appear in the **Libraries** section of the navigation pane in SAS Studio.

To view the status and properties of your background submissions, click **View** and select **Submission Status**. Background submissions are indicated by . For more information, see [“Using the Submission Status Window”](#) on page 26.



		Name	Type	Run Time	Submitted	Completed
		SAS_Program.sas	Program	4.037s	4/10/2020, 3:02:02 PM	4/10/2020, 3:02:06 PM
		datastep_horsepower.sas	Program	21.039s	4/10/2020, 3:19:47 PM	4/10/2020, 3:20:08 PM
		program_flow.flw.sas	Flow		4/10/2020, 3:51:45 PM	

Customizing Your Background Submissions

The Preferences window enables you to customize how to handle background submissions.

To change whether existing log and output files are deleted or overwritten when you rerun a background submission, select **Options** ⇌ **Preferences**. Click **Background Submit**.

For more information about each option, see [“Setting Background Submit Preferences”](#) on page 193.

Using the Submission Status Window

The Submission Status window displays information about the programs, tasks, queries, and flows that you run in SAS Studio. To open the Submission Status

window, select **View** ⇒ **Submission Status** or click **Submission** in the lower right corner of your SAS Studio browser window.

To cancel a submission that is currently running, right-click the item and select **Cancel**. To cancel all programs, tasks, queries, and flows that are currently running, click **Cancel All** on the Submission Status window toolbar.

Note: You cannot cancel background submissions.

The Submission Status window includes an entry for each time you have run a program, task, query, or flow. You can use the Submission Status window to return to an earlier version of a program, task, query, or flow. When you click an item in the Submission Status window, you open the version of the item that was run at that time and the associated log. The program or automatically generated task, query, or flow code opens in a new tab from which you can make and save changes.

Note: The code that you open from the Submission Status window is a copy of the code that SAS Studio ran and is no longer associated with the original program, task, query, or flow. Editing this code does not affect the original program, task, query, or flow.

Filter		Filter submissions list	Cancel All	Clear All					
▼ Status (no filter)	Reset								
<input type="checkbox"/> Cancelled	(1)								
<input type="checkbox"/> Errors	(1)								
<input type="checkbox"/> Successful	(2)								
		Sales_study.flw.sas	Flow	3.101s	3/27/2020, 11:52:24 AM	3/27/2020, 11:52:27 AM	SAS Studio compute context		
		class_analysis.sas	Program	5.649s	3/27/2020, 11:53:32 AM	3/27/2020, 11:53:37 AM	SAS Studio compute context		
		Summary Statisti...	Task	2.137s	3/27/2020, 11:55:53 AM	3/27/2020, 11:55:55 AM	SAS Studio compute context		
		longprogram.sas	Program	5.654s	3/27/2020, 12:11:32 PM	3/27/2020, 12:11:38 PM	SAS Studio compute context		

You can customize the items that are displayed in the Submission Status window in several ways:

- Use the Filter pane to subset the displayed items by submission status.
- Use the **Filter submissions list** box to specify filter criteria for the Name column.
- To remove an individual item from the submission list, right-click the item and select **Clear**.
- To remove all items from the submission list, click **Clear All** on the Submission Status window toolbar. Items that are in the process of being submitted are not cleared from the list.


Note: When your SAS Studio session ends, all items from the Submission Status window are removed except for background submissions. You must manually clear background submission items to remove them from the Submission Status window.

Using the Document Recovery Window

The Document Recovery window enables you to recover or delete the files that SAS Studio has automatically saved. By default, SAS Studio automatically saves your open files, such as SAS programs, flows, queries, and tasks, if SAS Studio times out while you are away or closes unexpectedly due to a situation such as a power loss.

To open the Document Recovery window, select **View** ⇒ **Document recovery**, or click **Recover** in the lower right corner of your SAS Studio browser window.

Note: The Document Recovery window is available only if you have recovered documents. You can use the **Enable document recovery** option to manage the document recovery feature. For more information, see “[Setting General Preferences](#)” on page 183.

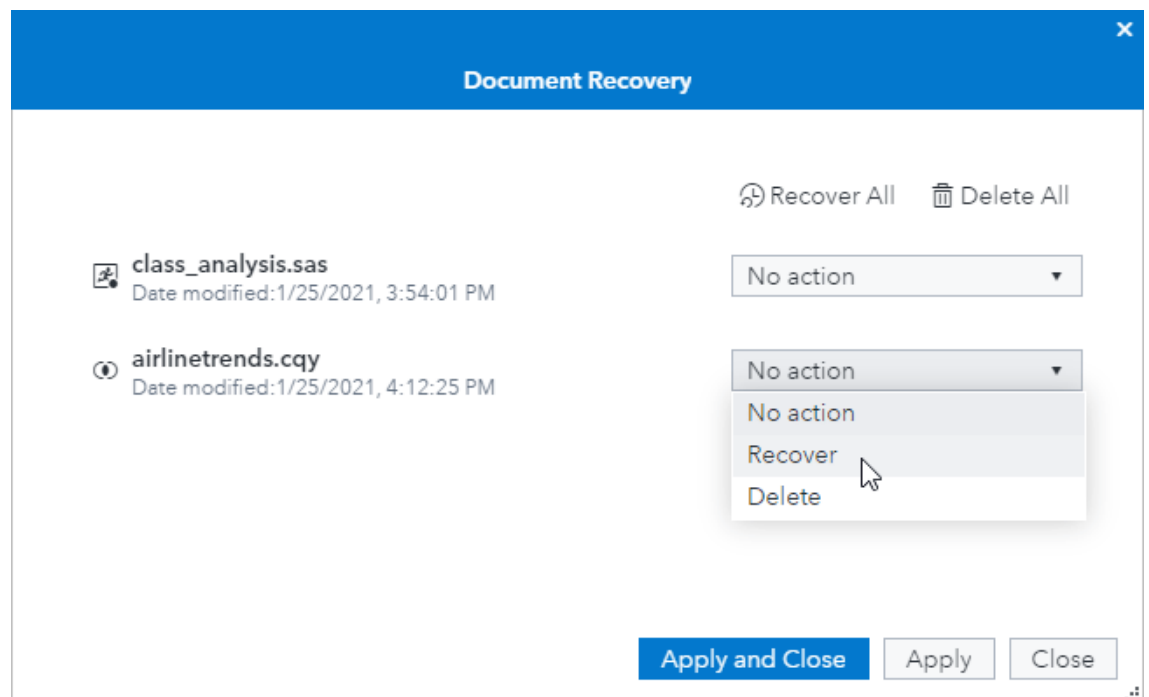

For each file in the Document Recovery window, you can choose from among these options:

- **No action** - retains the file in the list of recovered documents. The file continues to be available from the Document Recovery window until you recover it or delete it.
- **Recover** - opens the file in a new tab in the work area. The file is deleted from the list of recovered documents.
- **Delete** - deletes the file from the list of recovered documents.

Note: You can also recover or delete all of the documents by clicking **Recover All** or **Delete All**.

When you have specified actions for the recovered files, choose one of these options:

- **Apply and Close** - applies the selected actions to the files and closes the Document Recovery window.
- **Apply** - applies the selected actions to the files, but does not close the Document Recovery window.
- **Close** - closes the Document Recovery window without applying any actions to the files. The files are still available the next time you open the Document Recovery window.


Scheduling a Program, Task, Query, or Flow as a Job

You can schedule saved items, including programs, tasks, queries, and flows, to run at a specified time and frequency. Scheduled items still run even when you are not using SAS Studio.

Scheduling a Program, Task, Query, or Flow

To schedule an item to run at a specified time:

- 1 Right-click the item in the **Explorer** section of the navigation pane and select **Schedule as a job**.

Note: You can also schedule items by clicking  on the item toolbar and selecting **Schedule as a job**.


- 2 In the New Trigger window, specify how frequently to run the job. You can also specify the time at which the job should run and the start date and the end date for running the job.
- 3 Click **Save**. You can use the Scheduled Jobs window to view and manage your scheduled jobs.

Using the Scheduled Jobs Window





The Scheduled Jobs window displays information about all of your scheduled jobs in SAS Studio. You can schedule saved programs, tasks, queries, and flows, and you can also create and schedule SAS Viya platform jobs. SAS Viya platform jobs consist of a program and its definition and can include an HTML form or task prompt to provide a user interface to the job.

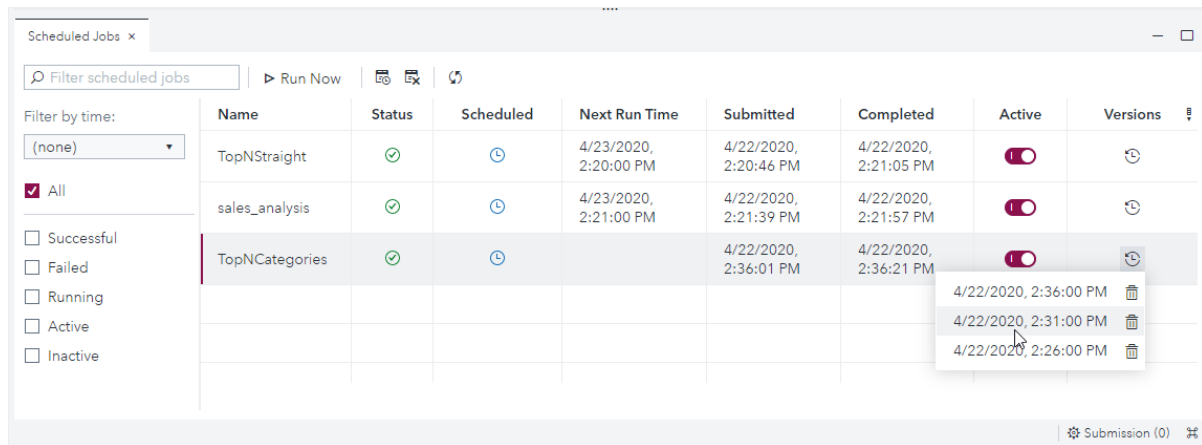

To open the Scheduled Jobs window, select **View** ⇒ **Scheduled Jobs**. For information about SAS Viya platform jobs, see [“Managing Jobs” in SAS Studio Developer’s Guide: Working with Jobs](#).

The Scheduled Jobs window includes an entry with information about each job that you have scheduled, including the next time the job is scheduled to run as well as the latest submission and completion times of the job.



You can change when a scheduled job runs in the following ways:


- To run a scheduled job immediately, select the job and click **Run Now**. The job opens in a separate browser window.
- To deactivate a scheduled job, click  in the row for that job. To reactivate the job, click .
- To change when a job is scheduled, click  button. The Edit Trigger window opens so that you can change when the job runs.
- To remove a job from the schedule, select the job and click . The job remains in the Scheduled Jobs window, but is no longer scheduled to run. To reschedule the job, right-click the job and select **Schedule**.
- To delete a job, right-click the job and select **Delete job**.

To view a list of all submitted versions of a job, click . You can open the code, log, and results that are associated with the job by clicking the appropriate version in the list. To delete a specific version of a job, click  beside the appropriate version.

Note: The code that you open from the Scheduled Jobs window is a copy of the code that SAS Studio ran and is no longer associated with the original program,

task, query, or flow. Editing this code does not affect the original program, task, query, or flow.

You can customize the Scheduled Jobs window in several ways:

- Use the **Filter scheduled jobs** box to specify filter criteria for the Name column.
- Use the **Filter by time** drop-down list to select a specific time period that you want to view.
- Specify whether you want to view all or only selected types of submission status.
- Click  to open the Manage Columns window and specify the columns to display in the window.


Note: The SAS Studio scheduling feature provides basic scheduling functionality for a single user. Administrators can access more advanced scheduling options by using SAS Environment Manager. SAS Environment Manager enables administrators to view and manage jobs for multiple users. For more information, see [“Jobs and Flows Page” in SAS Environment Manager: User’s Guide](#).

Understanding Perspectives

Because SAS Studio can be used by a variety of people and groups within an organization, you can choose to view a specific subset of features, or perspective, that meets your needs best. Perspectives are sets of functionality that are customized to meet the needs of different types of users. SAS Studio includes two perspectives: the Standard perspective and the Interactive perspective.

The Standard perspective is for users who want to be able to write SAS programs, use the predefined tasks, and create flows. In the Standard perspective, SAS program files are run as a whole. By default, the Standard perspective opens with the **Start Page** tab and includes these sections of the navigation pane: Open Files, Explorer, Steps, Tasks, Snippets, Libraries, and Git Repositories.

The Interactive perspective is designed for users who intend to use SAS Studio mainly for writing and editing SAS programs that use interactive SAS procedures. By default, the Interactive perspective opens with the **Start Page** tab, and the **Log** and **Results** tabs are displayed in a separate horizontal tab group. In addition, the log data and results from all of your program tabs are appended together in one log tab and one results tab. In the Standard perspective, there are separate log and results tabs for each program. For more information, see [“Working with the Interactive Perspective” on page 55](#).

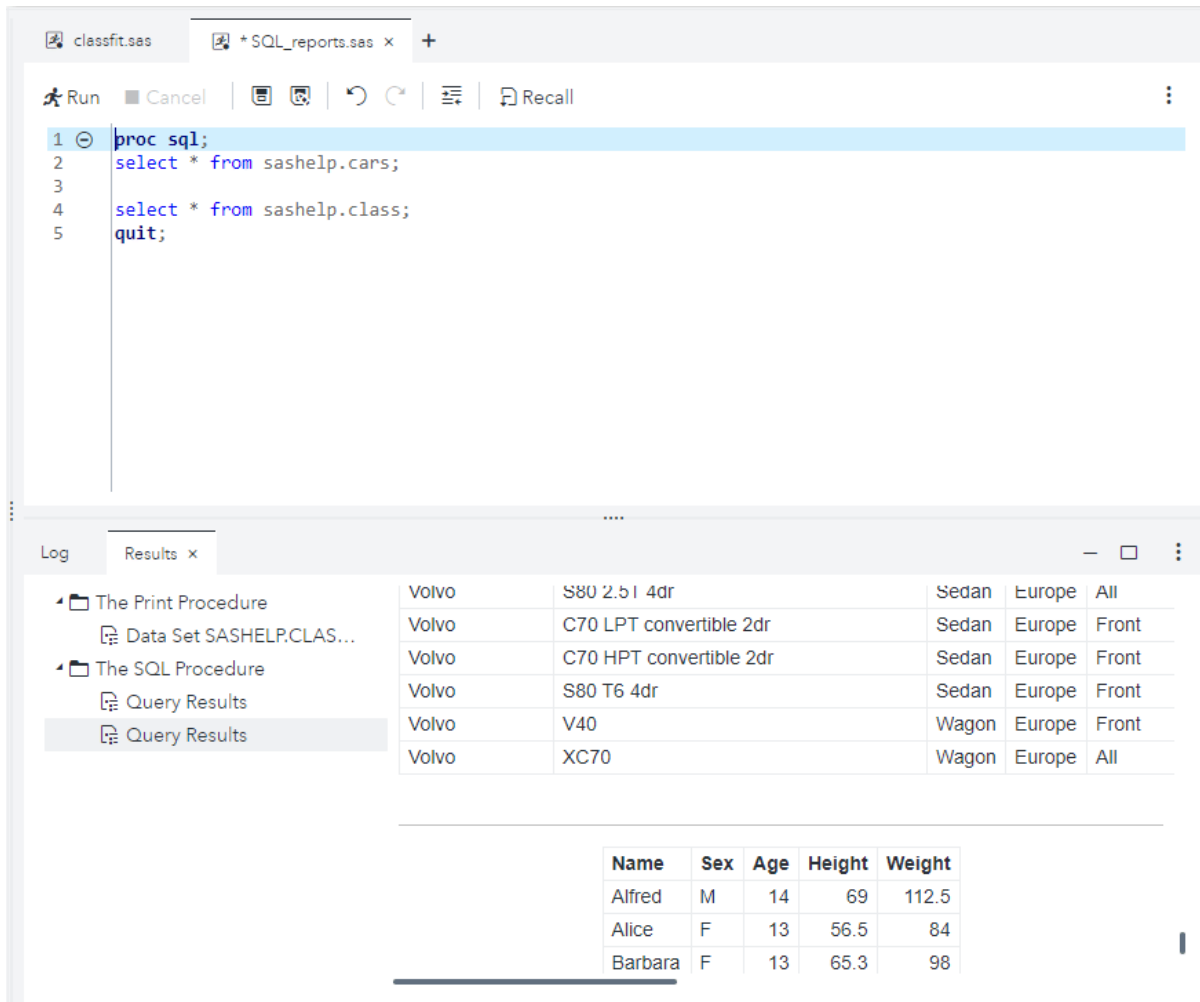

The differences between the perspectives can be viewed in the following table:

Element in SAS Studio	Available in Standard?	Available in Interactive?
Navigation Pane sections		
■ Open Files	Yes	Yes
■ Explorer	Yes	Yes
■ Steps	Yes	No
■ Tasks	Yes	No
■ Snippets	Yes	Yes
■ Libraries	Yes	Yes
■ Git	Yes	No

Element in SAS Studio	Available in Standard?	Available in Interactive?
■ File References	Yes, but not displayed by default	Yes, but not displayed by default
Ability to create and open queries	Yes	No
Ability to create and run a flow	Yes	No
Ability to create and run job definitions	Yes	No
Options to recall code and clear code on submit	No	Yes
Options to generate PDF, Word, RTF, Excel, and PowerPoint output	Yes	No
Ability to test the connection to a library	Yes	No
Ability to import data	Yes	No
Ability to export data	Yes	No
Ability to print data	Yes	No
Ability to validate an expression in the Filter Table Rows window	Yes	No
Ability to validate the autoexec.sas file	Yes	No
Ability to insert custom code	Yes	No
Ability to update column properties	Yes	No

After you have started SAS Studio, you can change the perspective that you are using by selecting **Options** ⇒ **Change perspective** and then selecting the perspective that you want to use.

You can specify which sections of the navigation pane are displayed in SAS Studio by selecting **View** ⇒ **Navigation panes**.

Editing the Autoexec File

The autoexec.sas file includes SAS statements that run each time you start SAS Studio and connect to your SAS server. For example, you can use the autoexec.sas

file to assign libraries that you want to be available every time you use SAS Studio in both the Standard and Interactive perspectives.

Note: If you create a library by using the New Library window, you can select the **Persist this library beyond the current session** option to automatically add the LIBNAME statement to the autoexec.sas file. For more information, see [“Working with Libraries” on page 11](#).

To edit the autoexec.sas file:

- 1 Select **Options** ⇒ **Autoexec file**.
- 2 Enter the code that you want to include in the autoexec.sas file.
- 3 To validate your syntax, click **Run**. The **Log** tab opens so that you can view the log.

Note: The option to run the autoexec file is available only in the Standard perspective. For more information, see [“Understanding Perspectives” on page 31](#).

- 4 Click **Save** to save and close the autoexec file.

Inserting Custom SAS Code

You can specify the SAS code to run before or after the code for programs, tasks, queries, and imports. This custom code is always run and persists between sessions.

To include custom SAS code:

- 1 Select **Options** ⇒ **Custom code**.
- 2 Specify the preamble and postamble SAS code. Click **Run** to validate the syntax.
- 3 On the **Options** tab, specify where to insert the custom code. You can choose from programs, tasks, queries, and imports. You can also specify whether to include the code if you are running a background submit.
- 4 Click **Save**.

Resetting Your SAS Session


You can terminate your current SAS session and create a workspace session by using the **Reset SAS Session** option. The **Reset SAS Session** option terminates your current workspace session by running the ENDSAS statement and then creates a new workspace session. When the new workspace session is started, SAS Studio runs the autoexec file to initialize the session. To reset your SAS session, select **Options** ⇒ **Reset SAS session**.

Note: All files in the Work library are deleted when you reset your SAS session.

Managing Keyboard Shortcuts

SAS Studio includes many keyboard shortcuts that you can use to perform a task. For a list of keyboard shortcuts, see [“Keyboard Shortcuts” in SAS Studio: Accessibility Features](#).

You can customize some keyboard shortcuts and assign keyboard shortcuts to some features that do not have shortcut keys by default. To manage your keyboard shortcuts, select **Options** ⇒ **Manage keyboard shortcuts**. When you enter a new keyboard shortcut, you are prompted to confirm your changes.

Note: To view the keyboard shortcuts for your application, click  in the lower right corner of your SAS Studio browser window.

Changing Your Compute Context

If you have access to more than one compute context, you can change the context that SAS Studio uses. To change the compute context, click the current compute context that is displayed in the upper right of the application window. Select the compute context that you want to use. When you change the compute context, note the following information:

- Any libraries and file shortcuts that you created are deleted.
- Scheduled jobs and background submissions are not canceled or cleared.
- All open tabs remain open.

For more information, see [“Server Contexts: Concepts”](#) in *SAS Viya Platform: Server Contexts*.

Note: You can work on only one compute context at a time.

Working with Programs

<i>About the SAS Code Editor</i>	38
<i>About the Python Code Editor</i>	38
<i>Opening and Creating Programs</i>	40
Opening a Program	40
Creating a Program	41
Running a Program	41
Saving a Program	43
Creating a Job from a Program	43
Using the Autocomplete Feature	43
Using the Syntax Help	47
Matching Parentheses	49
Selecting Columns of Text	50
Using Multi-line Editing	50
Adding Table Names and Column Names	50
Inserting a Pathname	51
Editing the Code from a Task or Query	51
Creating a SAS Program Package	52
Creating a Program Summary	53
Using Macro Variables	53
Using Your Submission History	54
Automatically Formatting Your SAS Code	55
Working with the Interactive Perspective	55
<i>Using the DATA Step Debugger</i>	56
About the DATA Step Debugger	56
Getting Started with the DATA Step Debugger	57
Using the DATA Step Debugger	58
<i>Working with Snippets</i>	65
Why Use Snippets?	65
Create a Snippet	76
How to Insert a Code Snippet	76
<i>Customizing the Code Editor</i>	77

About the SAS Code Editor

SAS Studio includes a color-coded, syntax-checking editor for editing new or existing SAS programs. The editor includes a wide variety of features such as autocompletion, automatic formatting, and pop-up syntax help. With the code editor, you can write, run, and save SAS programs. You can also modify and save the code that is automatically generated when you run a task.

SAS Studio includes several sample SAS code snippets that you can use to make programming common tasks easier.

The screenshot shows the SAS Code Editor interface. The left pane displays SAS code with line numbers 25 through 52. The code includes comments and PROC statements for summarizing data, sorting, and outputting results. The right pane shows the output of the code, which is a table titled "Top Models by MPG_City for each region of Origin".

```

25
26 /* summarize the data across a category and store
27 /* the output in an output data set */
27 proc means data=&data &stat noprint;
28   var &measure;
29   class &category &report;
30   output out=summary &stat=&measure &category /le
31   run;
32
33 /* store the value of the measure for ALL rows ar
34 /* the row count into a macro variable for use *
35 /* later in the report */
36 proc sql noprint;
37   select &measure, _FREQ_ into :overall, :numobs
38   from summary where _TYPE_=0;
39   select count(distinct &category) into :category
40   quit;
41
42 /* sort the results so that we get the TOP values
43 /* rising to the top of the data set */
44 proc sort data=work.summary out=work.topn;
45   where _type_>2;
46   by &category descending &measure;
47   run;
48
49 /* Pass through the data and output the first N *
50 /* values for each category */
51 data topn;
52

```

Origin	Rank	Model	MPG (Ci
Asia	1	Insight 2dr (gas/electric)	
	2	Prius 4dr (gas/electric)	
	3	Civic Hybrid 4dr manual (gas/electric)	
	4	Civic HX 2dr	
	5	Echo 2dr manual	
	6	Echo 4dr	
	7	Echo 2dr auto	
	8	Civic DX 2dr	
	9	Civic EX 4dr	
	10	Civic LX 4dr	
Europe	1	Jetta GLS TDI 4dr	
	2	Cooper	
	3	Cooper S	
	4	GTI 1.8T 2dr hatch	
	5	Golf GLS 4dr	
	6	Jetta GL	
	7	New Beetle GLS 1.8T 2dr	

About the Python Code Editor

SAS Studio includes a color-coded editor for editing new or existing Python programs (*.py). With the Python code editor, you can write, run, and save Python programs without explicitly using PROC PYTHON. Your PROC PYTHON options are stored in SAS Environment Manager and do not need to be included in your Python program. You can use any Python package that is available in your environment. SAS Studio automatically uses your Python code to generate a SAS program by using PROC PYTHON.

Note: For more information, see “PYTHON Procedure” in *Base SAS Procedures Guide*.

The screenshot displays the Python Code Editor interface. The left pane shows the code for `PythonSample.py` with the following content:

```

1 import os, sys
2 sys.path
3
4 # define our data references
5 input_table = 'SASHELP.CLASS'
6 output_table = 'WORK.PYTHONOUT'
7
8 # set input data to pipe from SAS
9 dfin = SAS.sd2df(input_table)
10
11 # output to the log details about the table
12 print("input data shape is:", dfin.shape)
13
14 # call the python transpose
15 dfout = dfin.transpose()
16
17 # output to the log details about the table
18 print("output data shape is:", dfout.shape)
19
20 # set output data using call to pipe to SAS
21 SAS.df2sd(dfout, output_table)
22
23 SAS.submit('proc print data=work.pythonout;');
24
25

```

The right pane shows the output data, which is a table with 5 observations and 7 columns (Obs, 0, 1, 2, 3, 4, 5, 6). The data is as follows:

Obs	0	1	2	3	4	5	6
1	Alfred	Alice	Barbara	Carol	Henry	James	Jan
2	M	F	F	F	M	M	F
3	14.0	13.0	13.0	14.0	14.0	12.0	12.0
4	69.0	56.5	65.3	62.8	63.5	57.3	59.0
5	112.5	84.0	98.0	102.5	102.5	83.0	84.0

The status bar at the bottom indicates "Line 1 Column 1 UTF-8 Submission (0)".

Many of the features that are available for SAS programs are also available for Python programs, including the ability to schedule a Python program and run a Python program as a job or a background submission. You can also customize the behavior and appearance of the Python code editor by using the Editors preferences.

TIP If you want to submit SAS code from within your Python program, use the `SAS.submit` method. This method is useful if you need to specify SAS options or you want to execute a SAS procedure in your Python program. For example, you can add this line of code to the beginning of your Python program to submit the `VALIDVARNAME` option:

```
SAS.submit('options validvarname=any;')
```

The following code example uses the `SAS.submit` method to submit a `PROC PRINT` statement:

```
SAS.submit('proc print data=sashelp.class;')
```

Opening and Creating Programs

Opening a Program

You can open SAS programs from the **Explorer** section of the navigation pane. To open a program, expand the appropriate folder and double-click the program that you want to open, or right-click the program in the navigation pane and select **Open**. The program opens in a new tab in the work area.

Note: You can also open a file by clicking **Open** on the toolbar and selecting a file from your available folders. If you are opening a SAS program or text file, then you can specify the text encoding that you want to use by selecting **Open with encoding** and clicking **Open**. Use the Select Encoding window to specify the encoding that you want.

Note: Opening very large program files can affect your performance. By default, if you open a program file that is greater than 10 MB, you are prompted to confirm whether you want to continue opening the file. You can use the **Display warning if text files are larger than specified size** option to change the file size that determines when a warning is displayed. For more information, see [“Setting General Preferences” on page 183](#).

In the lower right corner of the code editor, you can view the current line and column position of the cursor. If you are viewing a *.sas or *.txt file, the text encoding is displayed as well. To go to a specific line in the program, right-click in the program and select **Go to line**. Enter the line number in the **Go to line** box. You can also right-click in the program and select **Encoding** and select another character-set encoding option.

The screenshot shows the SAS Code Editor interface. At the top, there is a toolbar with icons for Run, Cancel, Undo, Redo, Copy to My Snippets, Refresh, and Debug. Below the toolbar is a "Go to line:" input field. The main area contains the following SAS code:

```

1  /* DATA step to create the "hat" data */
2  data hat;
3      do x = -5 to 5 by .5;
4          do y = -5 to 5 by .5;
5              z = sin(sqrt(y*y + x*x));
6              output;
7          end;
8      end;
9  run;
10
11 /* The G3D procedure plots the data in */
12 /* the shape of a cowboy hat */
13 proc g3d data=hat;
14     plot y*x=z;
15 run;
16

```

Creating a Program

To create a SAS program, select **New** ⇒ **SAS program**.

To create a Python program, select **New** ⇒ **Python program**.

Note: You can also use the **New** menu to begin importing a file as well as create flows, queries, tasks, jobs, text files, and XML files.

Running a Program


After you have written your program, you can run the entire program, a region of code, or you can select specific lines of code to run.

- To run the entire program, click **Run** on the toolbar.
- To run a region of code, right-click the region of code that you want to run, and select **Run region**. Regions of code are identified in the code editor as blocks of code that can be collapsed and expanded. The **Enable code folding** option must be selected in order to run a region of code. For more information, see [“Setting General Code Editor Preferences” on page 189](#).

- To run a portion of the program, select the lines of code that you want to run and then click **Run**.



By default, if there are no errors, the results open automatically, and if there are errors, the **Log** tab opens. You can click one or more of the **Errors**, **Warnings**, and **Notes** sections to view the messages. When you click a message, SAS Studio highlights it for you in the log so that you can see exactly where the message occurs in the log.

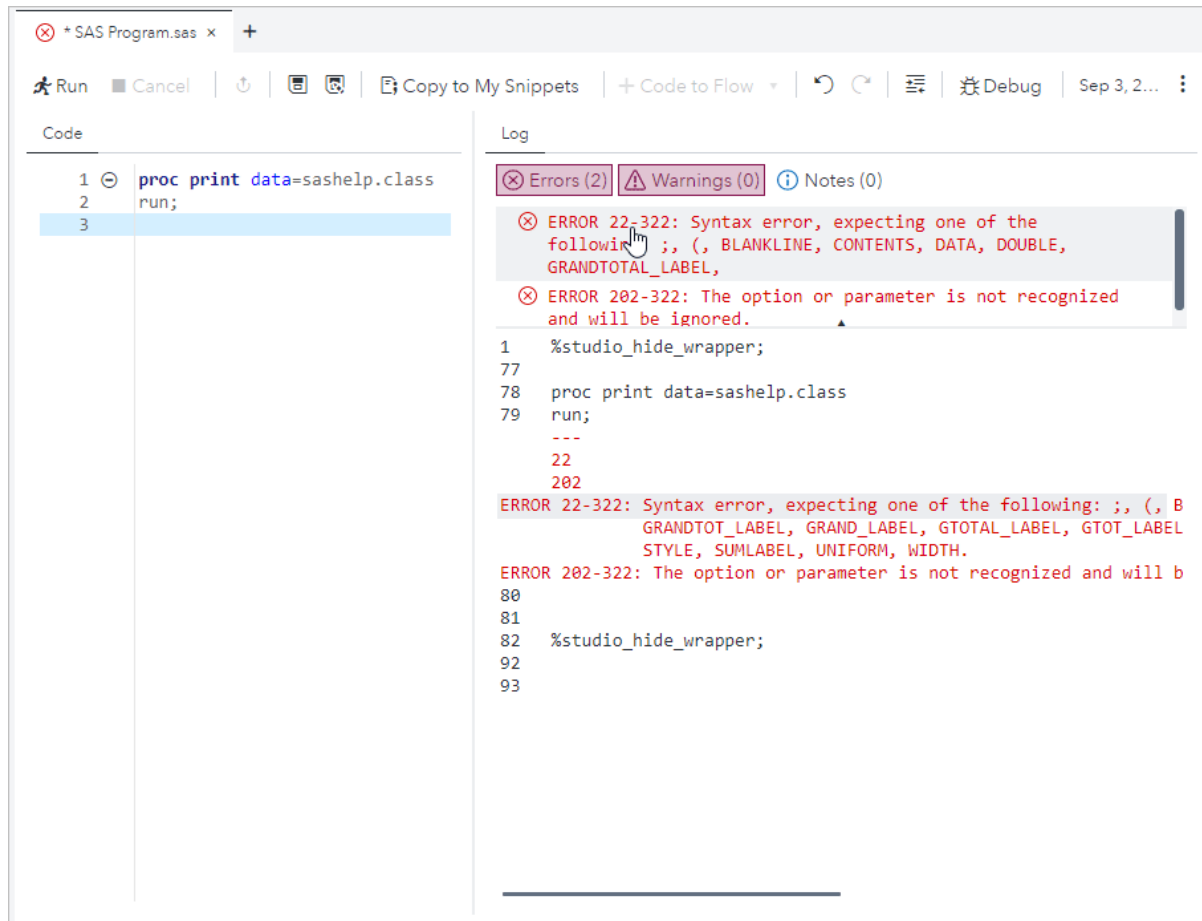Note: You can specify which tab you want to display after you run a program or task by using the General preferences. For more information, see [“Setting General Preferences” on page 183](#).



Note: Because you are working in a server environment, do not include the ENDSAS statement in your SAS programs. If you run a program that contains ENDSAS, reset your SAS session by selecting **Options** ⇒ **Reset SAS session**.

Saving a Program

To save updates to an existing program in its current location, click  on the toolbar. To save the entire program with a new name or location, click . If you want to specify the text encoding when you save a program or text file, right-click in the file, select **Encoding**, and specify the new encoding option before you save the file.

Note: You can also create a SAS program package or a program summary when you save your program. For more information, see [“Creating a SAS Program Package” on page 52](#) and [“Creating a Program Summary” on page 53](#).

Creating a Job from a Program

To create a job from a saved program, open the Explorer pane. Navigate to the location of the saved program. Right-click the program name and select **Create job**. The new job opens as a job definition in the workspace. For more information, see [“Create a New Job Definition” in SAS Studio Developer’s Guide: Working with Jobs](#).

To deploy a program as a job, open the Explorer pane. Navigate to the location of the saved program. Right-click the name and select **Deploy as a job**. For more information, see [“Deploying and Redeploying a Flow or Program as a Job” in SAS Studio Developer’s Guide: Working with Jobs](#).

You can also schedule a job from the Explorer pane. Right-click the program name and select **Schedule a job**. For more information, see [“Schedule a Job” in SAS Studio Developer’s Guide: Working with Jobs](#).


Using the Autocomplete Feature

About the Autocomplete Feature


The autocomplete, or code completion, feature in the code editor can predict the next word that you want to enter in your SAS program before you actually enter it completely. The autocomplete feature can complete keywords that are associated with SAS procedures, statements, macros, functions, CALL routines, formats, informats, macro variables, SAS colors, style elements, style attributes, and statistics keywords, and various SAS statement and procedure options. The autocomplete feature can also complete librefs and table names.

Note: The autocomplete feature is available only for editing SAS programs.

This example shows the keywords and help that appear when you enter `proc a` in the code editor.

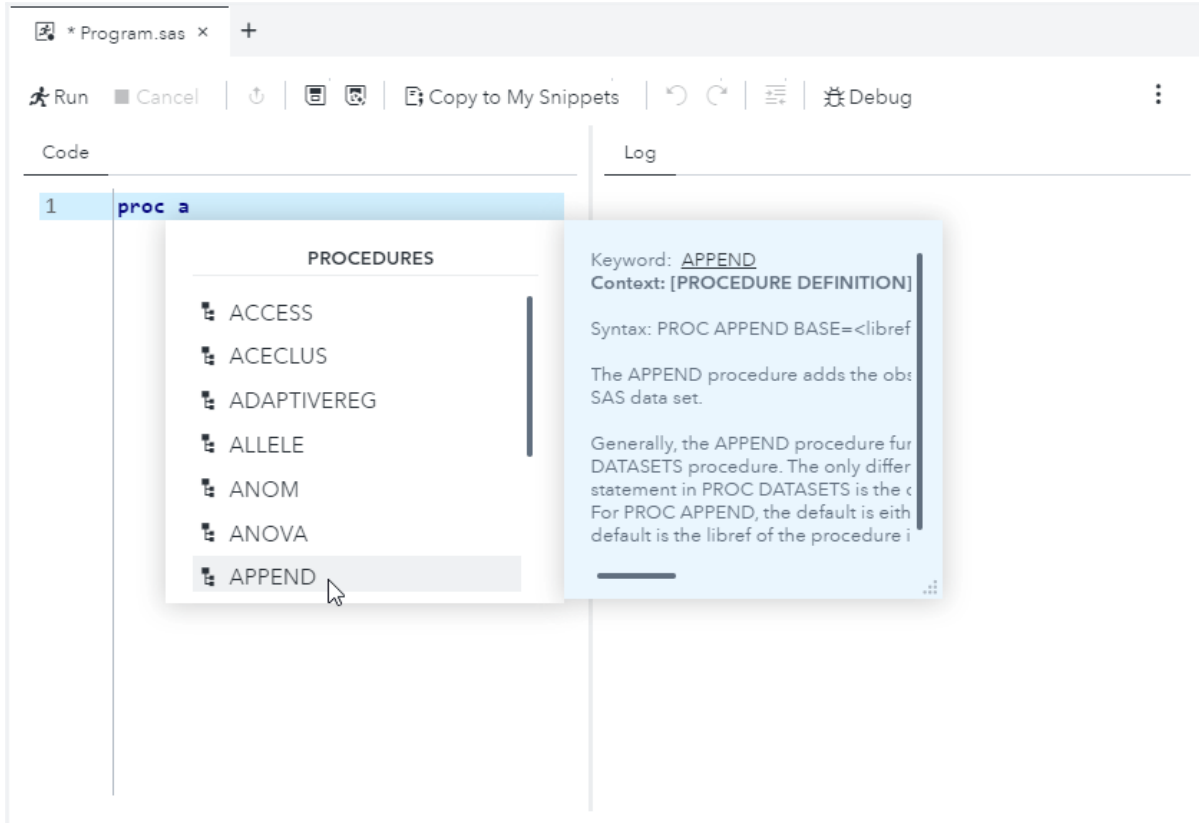

In this example, you select **APPEND** from the list of procedures so that `proc append` appears in the code editor. When you enter a space, the code editor displays a list of options for the APPEND procedure.

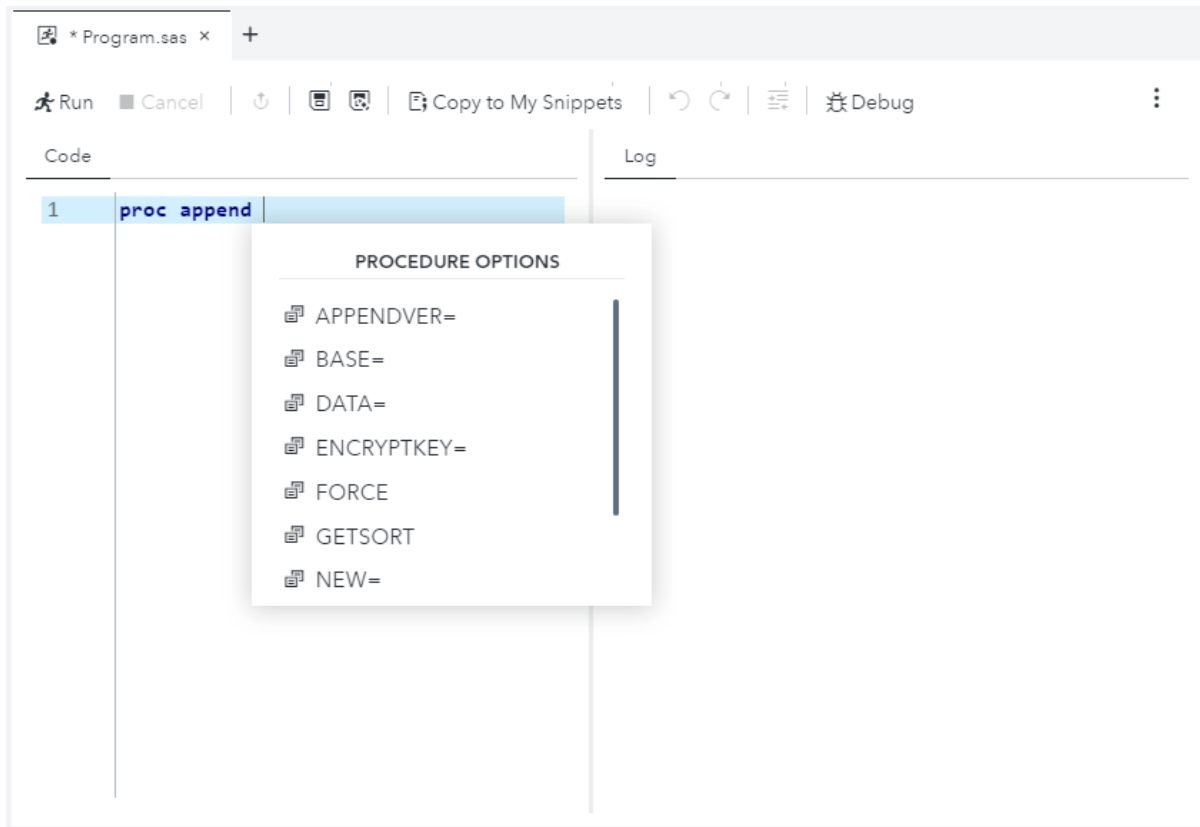


How to Use the Autocomplete Feature

To use the autocomplete feature:


- 1 How you open the autocomplete list depends on the keyword that you want to add.
 - If you want to add a global statement, DATA step statement, CALL routine, procedure, macro statement, or automatic macro variable, enter the first one or more letters of the keyword that you want to use.

A window opens with a list of suggested keywords that begin with those letters.

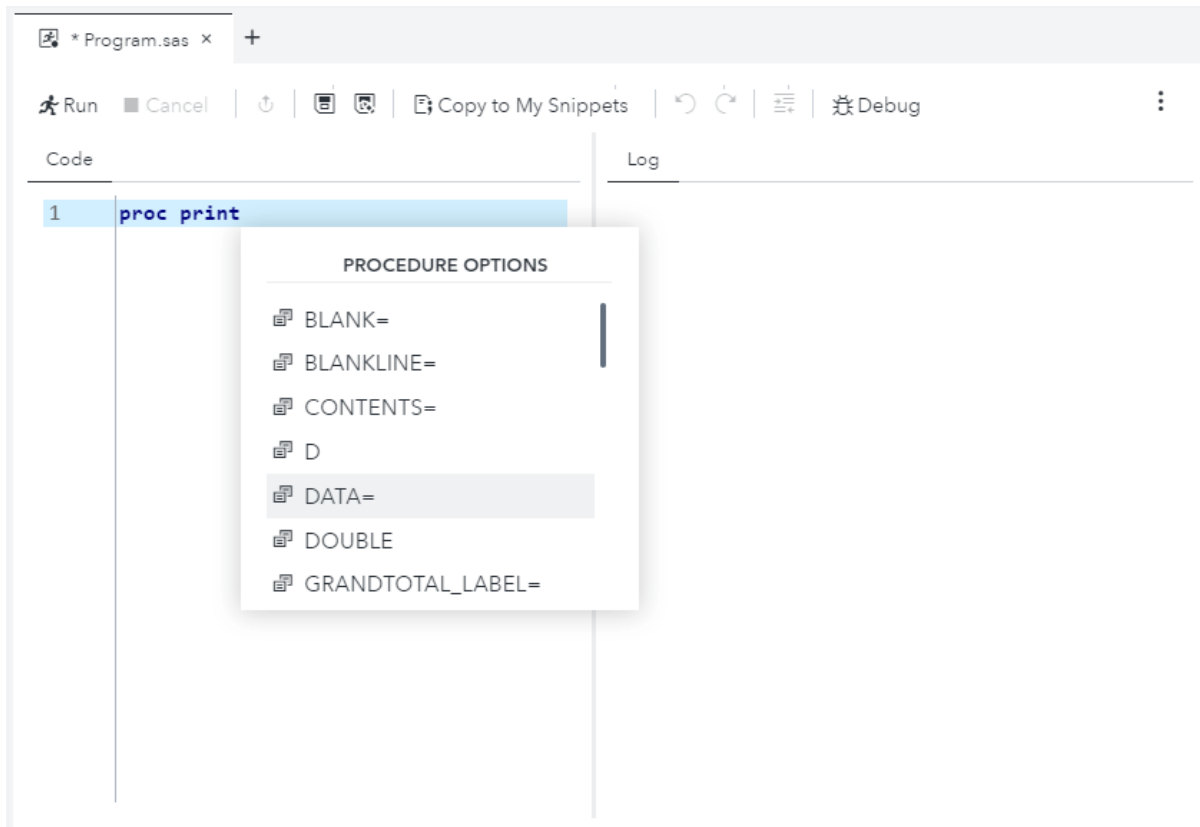

- If you want to specify colors, formats, informats, macro functions, SAS functions, statistics keywords, style elements, or style attributes, position your mouse pointer in a comment and press Ctrl+spacebar. To navigate through the list of options backward, press Ctrl+Shift+spacebar or use the arrow keys at the top of the pop-up window.

Note: These shortcuts work even if you have deselected the **Enable autocomplete** option in the Preferences window. For more information, see [“Customizing the Code Editor” on page 77](#).

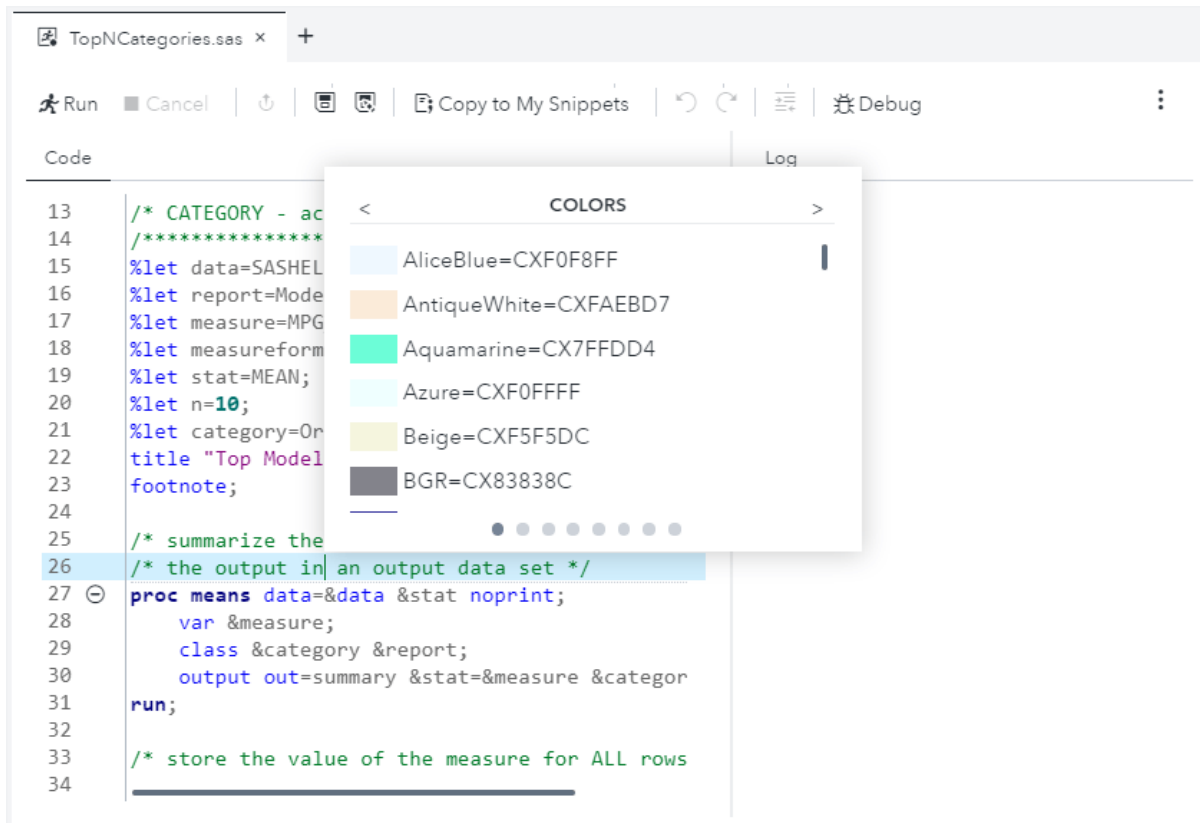

- 2 You can navigate to the keyword that you want to use in several ways:
 - Continue to type until the correct keyword is selected (because the matching improves as you type).
 - Scroll through the list by using the up and down arrow keys, the Page Up and Page Down keys, or your mouse.
- 3 You can add the keyword to your program by double-clicking the selected keyword or by pressing the Enter key.

Using the Syntax Help


The code editor displays brief SAS syntax documentation as you write and edit your SAS programs. You can display the Help in the following ways:

- Right-click a keyword in your program and select **Syntax help**.
- Start typing a valid SAS keyword, and then click a suggested keyword in the autocomplete window.
- Position the mouse pointer over a valid SAS keyword in your program. This works only if you have selected the **Enable hint when you hover over keywords** option in the Editors preferences. For more information, see [“Customizing the Code Editor” on page 77](#).


The SAS Product Documentation provides more comprehensive usage information about the SAS language, but the syntax help in the code editor can get you started

with a hint about the syntax or a brief description of the keyword. You can get additional help by clicking links in the syntax help window as follows:

- Click the keyword link at the top of the window to search the support.sas.com website for the keyword.

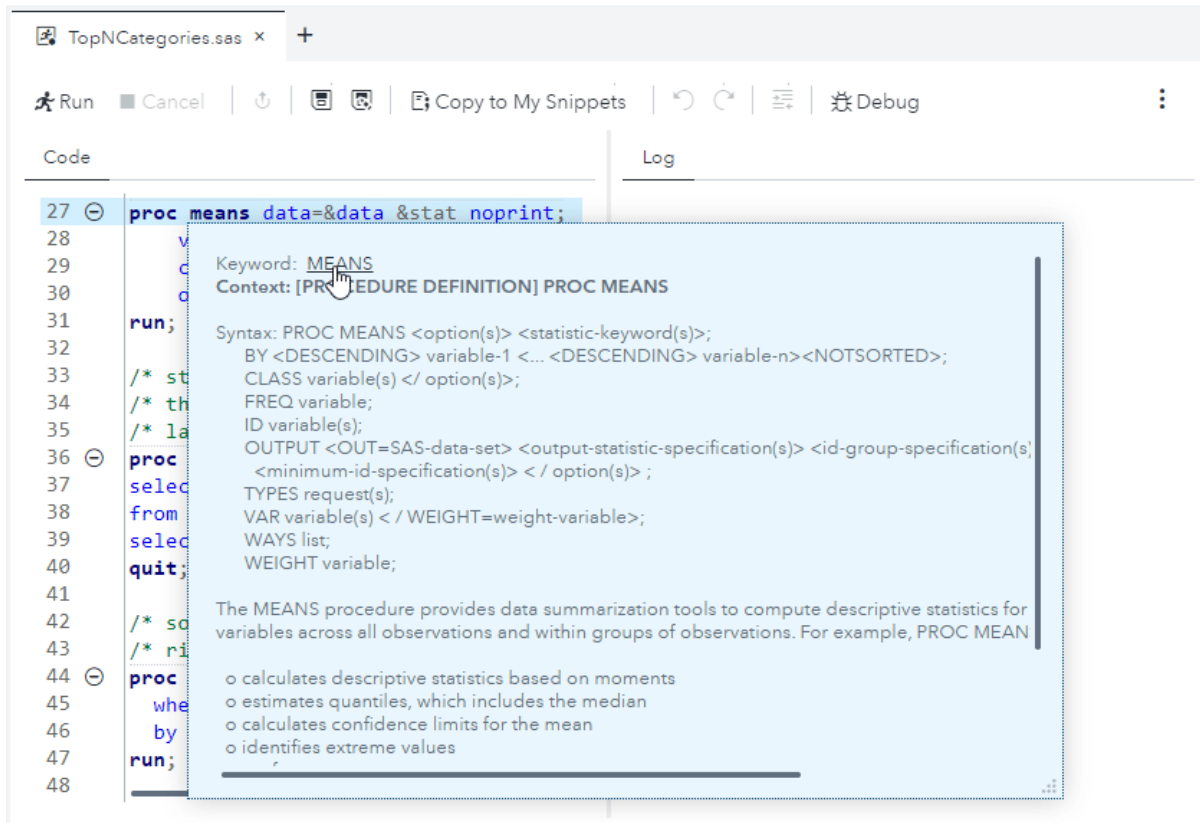

- Click the links at the bottom of the window to search for the keyword in the SAS Product Documentation, Samples and SAS Notes, and SAS Technical Papers.

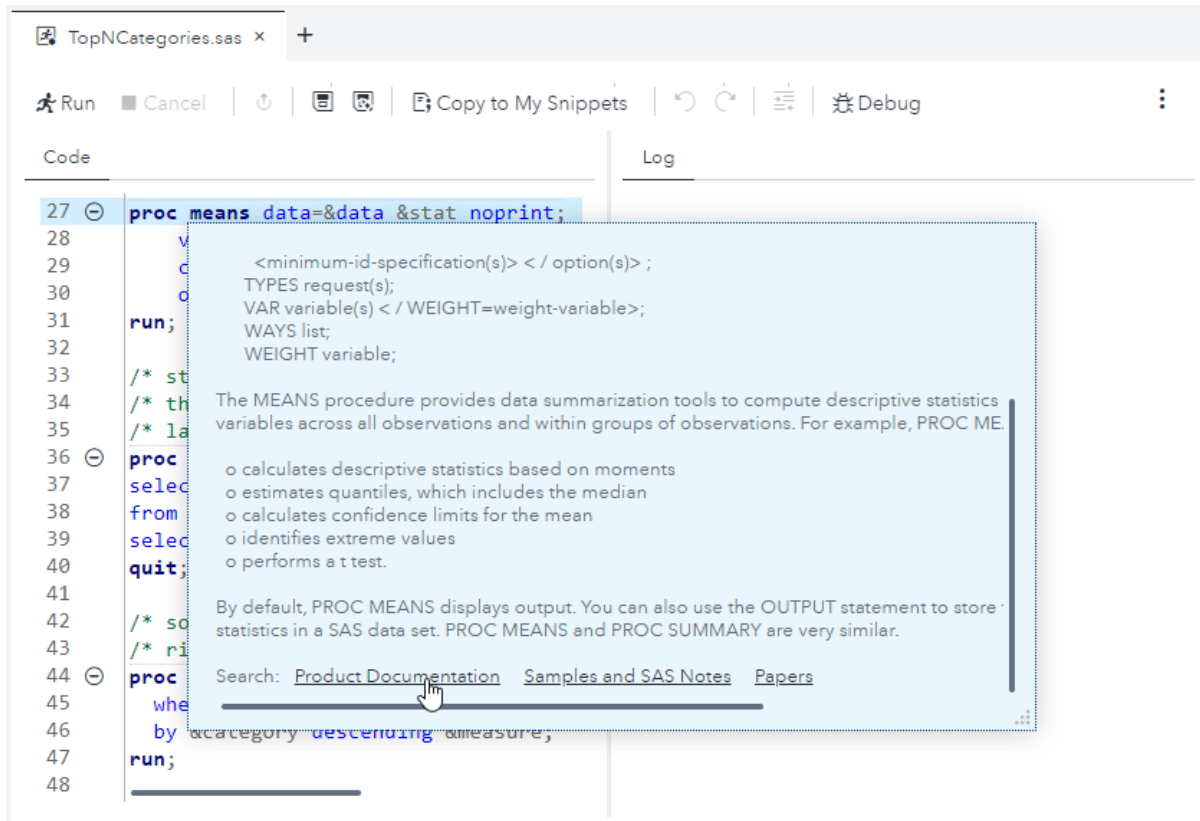

Matching Parentheses

You can use the parenthesis-matching feature to track nested parentheses within a program. The code editor highlights both the open and close parentheses. If only one parenthesis is highlighted, then you know that you are missing a parenthesis. This feature can be used to match parentheses, square brackets, angle brackets, and braces.

```
do y = -5 to 5 by .5;
  z = sin(sqrt(y*y + x*x));
```

To match parentheses, position the cursor in front of the open parenthesis or just after the close parenthesis that you want to match. The parenthesis and its match are highlighted. If the parenthesis does not have a match, it is not highlighted.

Note: You can use the Code Editor Settings page to turn the **Highlight matching brackets** option off. You can also select an option to automatically insert a closing bracket or parenthesis. For more information, see [“Setting General Code Editor Preferences” on page 189](#).

Selecting Columns of Text

You do not have to select entire horizontal lines of text. You can select columns or vertical blocks of text.

To select a column or vertical block of text:

- In Windows environments, press the Alt key while you select the text with the left mouse button.
- In Apple OS X environments, press the Option key while you select the text with the left mouse button.

Using Multi-line Editing

You can simultaneously edit multiple lines of code at one time. This feature is useful when you need to make the same additions or deletions in your code in multiple places.

To enable multi-line editing:

- In Windows environments, press the Ctrl key and click each location that you want to edit with the left mouse button. To exit multi-line editing, click another location in the code editor window.
- In Apple OS X environments, press the Command key and click each location that you want to edit with the left mouse button. To exit multi-line editing, click another location in the code editor window.

Adding Table Names and Column Names

From the **Libraries** section of the navigation pane, you can use a drag-and-drop operation to move table names and column names into the SAS code. For example, you can move the Sashelp.Cars table into the DATA option for the PRINT procedure. When you release the mouse, the fully qualified name for the table appears in your code.

Note: If the table or column name is a reserved word in a database, SAS Studio creates a name literal by automatically adding quotation marks and a lowercase letter `n` to ensure that the name is evaluated correctly by your program.

Inserting a Pathname

From the **Explorer** section of the navigation pane, you can right-click a folder or a *.sas file and select **Insert as path** to add the pathname of the folder or the pathname and file name of the file to your program. For example, you can right-click a folder such as

`/products/salesdata/` and select **Insert as path** to add it to a LIBNAME statement.


Note: This option is available only for stand-alone programs. It is not available for SAS Program nodes in a flow.

Editing the Code from a Task or Query

You can edit the code that is generated automatically when you run a task or query and then run it with your modifications. When you edit the code, SAS Studio opens it in a separate program window. The code is no longer associated with the original task or query.

To edit a program generated by a task or query:

- 1 On the appropriate task or query tab in the work area, click the **Code** subtab to display the code that is associated with the task or query.
- 2 On the toolbar, click **Edit Code**. The code is opened in a new program window.

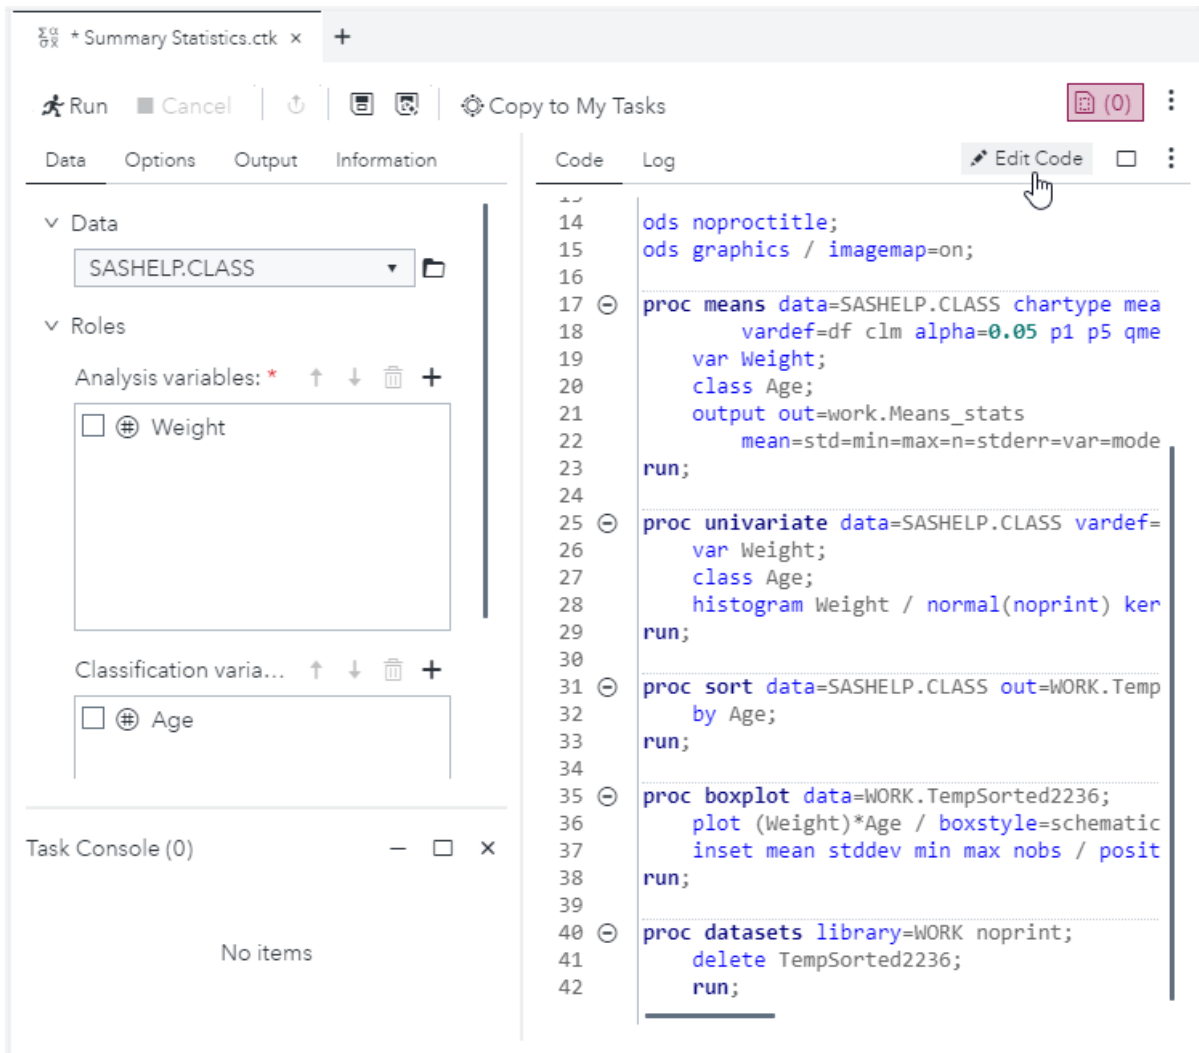


Creating a SAS Program Package

A SAS Program Package is a file that contains a snapshot of a program along with its log and HTML results. You can create a program package from code that you have written as well as code that is automatically generated when you run a task. When you open a program package in SAS Studio, you can access the code, log, and results without running the program again. If you make changes to the code and rerun it, the package is not automatically updated. You must save the package again to keep the changes.


Note:

- The program package does not include PDF or RTF results.
 - You cannot create a program package if you are using the Interactive perspective.
-


To create a program package file, open the code that you want to use and click . Specify the file location and name, and then select **Package** as the **Type** option.

Note: If you open a program package file and want to save the program or log individually or download the results as an HTML, PDF, or RTF file, you must rerun the program after you open the program package file.

Creating a Program Summary

You can create a summary page for code that you have written as well as code that is automatically generated when you run a task. The Program Summary page is an HTML file that opens in a separate browser tab and includes information about the program execution, the complete source code, the complete log, and the results. To view the Program Summary page for a program, click  and select **Open in a browser tab** ⇒ **Summary**.

Note: The Program Summary is available only after you have run the program.

You can also save a Program Summary file to a folder that you specify by clicking  and selecting **Summary** as the **Save as type** option. The Program Summary is saved as an HTML file.

Using Macro Variables

Macro variables can be used to add information that is obtained when a program or task is run, such as the name and version number of the application. You can reference these items within code, titles, or footnotes by preceding them with "&".

For example, you can use macros in a footnote like the following:

```
Generated with &_CLIENTAPP &_CLIENTVERSION
```

Note: In addition to the following macro variables, you can run this code to see other user-generated and automatic macro variables that are available:

```
%PUT _ALL_;
```

For information about SAS macro functions and variables, see *SAS Macro Language Reference*.

Macro Variable	Description
<code>_CLIENTAPP</code>	Name of the client application.
<code>_CLIENTAPPABBREV</code>	Abbreviated name of the client application.

Macro Variable	Description
_CLIENTMACHINE	Node name of the client machine.
_CLIENTMODE	Type of SAS Studio mode: <i>viya</i> (Standard perspective) or <i>interactive</i> (Interactive perspective).
_CLIENTVERSION	Application version.
_SASHOSTNAME	Server node name (IP address or DNS name).
_SASPROGRAMFILE	The full path and file name of the SAS program that is currently being run. This macro variable is available only for SAS program files that are saved on the same server on which your SAS Studio code is running.
_SASPROGRAMFILEHOST	The server node name on which the current SAS program is being run.
_SASWORKINGDIR	Current working directory.
SASWORKLOCATION	Location of the Work library.
SYSPROCESSNAME	Name of the current SAS process.
SYSPROCESSMODE	Current SAS session run mode or server type name.
SYSVLONG4	SAS software release number, maintenance level, and four-digit year.

Note: If you specify `%put _all_` or `%put _global_` in your SAS program, the output does not include any special characters. For example, slashes are not included in directory paths. To view the output with these special characters, you must specify the individual macro variable by name, such as `%put &_sasprogramfile;`.


Using Your Submission History

You can use the Submission Status window to access prior versions of your submitted code. Select **View** ⇒ **Submission Status** on the toolbar, or click **Submission** in the lower right corner of your SAS Studio browser window. The Submission Status tab includes an entry for each time you have run a program. When you click a program from the Submission Status window, you open the version of the program that was run at that time. The program opens in a new tab in the work area from which you can make and save changes.

Note: The submission history is cleared automatically when you sign off from SAS Studio.

For more information, see [“Using the Submission Status Window”](#) on page 26.

Automatically Formatting Your SAS Code

You can use the code editor to make your programs easier to read by automatically formatting your code. When you automatically format your code, line breaks are added, and each line is correctly indented according to its nesting level. To format the code in the code editor, click  on the toolbar. You can also choose to format a selected section of your code.

For example, the following code is difficult to read because it lacks indentation and logical line breaks:

```
data topn;
length rank 8; label rank="Rank";
set topn; by &category descending &measure;
if first.&category then rank=0; rank+1;
if rank le &n then output;
run;
```

After you use the automatic code-formatting feature, the program looks like this:

```
data topn;
  length rank 8;
  label rank="Rank";
  set topn;
  by &category descending &measure;

  if first.&category then
    rank=0;
  rank+1;

  if rank le &n then
    output;
run;
```

Working with the Interactive Perspective


What Is the Interactive Perspective?

Some SAS procedures are interactive, which means they remain active until you submit a QUIT statement, or until you submit a new PROC or DATA step. In SAS Studio, you can use the code editor to run these procedures, as well as other SAS procedures, in the Interactive perspective.

By using the Interactive perspective, you can run selected lines of code from your SAS program and use the results to determine your next steps. For example, the OPTMODEL procedure in SAS/OR enables you to model and solve mathematical programming models. By running this procedure interactively, you can quickly check results for parts of the program and determine whether you need to make any modifications without running the entire program.

Running a Program in the Interactive Perspective

When you run a program in the Interactive perspective, SAS Studio does not add any automatically generated code, such as ODS and %LET statements, to your program. In addition, results are generated only in HTML. In the Interactive perspective, the log and results are appended to the existing log and results. Previously submitted code remains active until you terminate it.

Note: You can clear the existing log and results by clicking  and then selecting **Clear log** or **Clear results**.

For example, suppose you have the following program:

```
proc sql;
  select * from sashelp.cars;

  select * from sashelp.class;
quit;
```

In the Standard perspective, if you select the first two lines of code and run them, the code runs successfully. If you then select the last two lines of code and run them, the code fails because the PROC SQL statement is missing.

If you switch to the Interactive perspective and follow the same steps, the last two lines of code run successfully because the PROC SQL statement is still active.

Note: For documentation about specific procedures, see the SAS Programmer's Bookshelf on support.sas.com.

Using the DATA Step Debugger

About the DATA Step Debugger

The DATA Step Debugger is a tool that enables you to find logic errors in a DATA step program. With the DATA Step Debugger, you can watch the variable values in

a program change as the program runs. You can execute the program line by line, and you can also set specific breakpoints in the program.

Note: The DATA Step Debugger works only with DATA step programs and only if your program does not have a syntax error.

Getting Started with the DATA Step Debugger

What Is Debugging?





Debugging is the process of removing logic errors from a program. Unlike syntax errors, logic errors do not stop a program from running. Instead, logic errors cause the program to produce unexpected results. For example, if you create a DATA step that tracks inventory, and your program shows that you are out of stock when your warehouse is actually full, you have a logic error in your program.

Without the DATA Step Debugger, you could debug your program by adding code, such as PUT statements, to your program and examining the results and log. Although the SAS log helps you identify data errors, the DATA Step Debugger offers you an easier, interactive way to identify logic errors, and sometimes data errors, in DATA steps.

How Debugging Works

When you open a DATA step in the DATA Step Debugger, SAS compiles the step, displays the code in the DATA Step Debugger window, and pauses until you begin execution. Each time execution is paused, the current values of each variable are displayed in the variables pane. For more information, see [“Inspecting Variable Values” on page 62](#).

You can execute your program in the DATA Step Debugger in several ways:

- If you begin execution by clicking , SAS executes each statement in the DATA step.
- To suspend execution at a particular line in the DATA step program, select one or more statements on which to set breakpoints. When you click , SAS executes the program until a breakpoint is reached. For more information, see [“Setting and Clearing Breakpoints” on page 61](#).
- To execute the DATA step one statement at a time, click . You can examine the variable values after each step in the program. For more information, see [“Executing the Program Step by Step” on page 61](#).
- To execute the DATA step until the value of a specific variable changes, select the variable to watch and click . SAS executes the program until the value of the specified variable changes. For more information, see [“Watching a Variable Value” on page 63](#).

Note: When you use the DATA Step Debugger, note these reminders:


- The DATA Step Debugger is available only in the Standard perspective. For more information, see “Understanding Perspectives” on page 31.
 - When you are debugging a DATA step, statements in the DATA step can iterate as many times as they would outside the debugging session. When the last iteration has finished, a message appears in the Debug Console.
 - DATA steps that include the DATALINES and CARDS statements cannot be debugged. You can work around this limitation in these ways:
 - Store your data in a flat file, and use the FILENAME statement to read the data into the DATA step.
 - Create two separate DATA steps: one DATA step that includes the DATALINES or CARDS statement and another debuggable DATA step to process the data.
 - You can debug only one DATA step at a time. You can use the DATA Step Debugger only with a DATA step and not with a PROC step.
-

Using the DATA Step Debugger

About the DATA Step Debugger Window

The DATA Step Debugger window includes many features that make it easier to debug your DATA step program:

- The currently executing line is highlighted in blue.
- The variables pane on the right side of the window lists each variable in the program with its current value.
- You can use the filter and search box to narrow the list of variables in the variables pane.
- As you step through a program, variable values that change are displayed in red.
- The Debug Console at the bottom of the window displays logging information as you execute the program.
- You can enter debugger commands directly on the command line at the bottom of the window. To view a list of valid commands, click ⓘ.

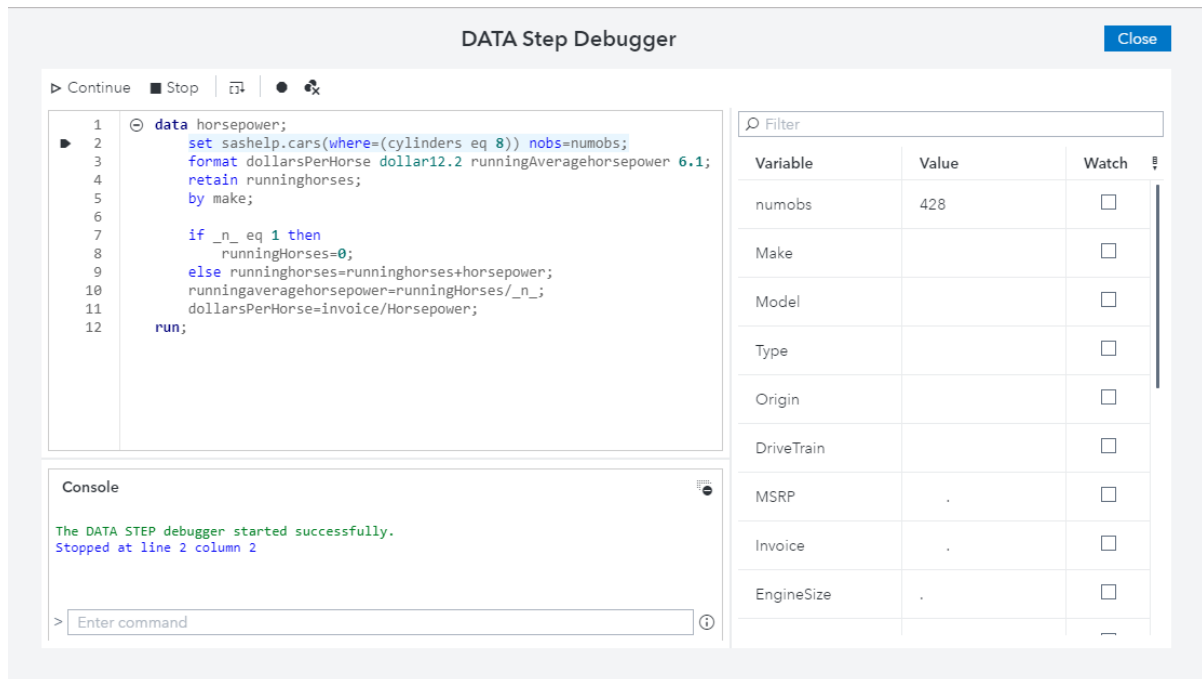

Opening the DATA Step Debugger


You can run the DATA Step Debugger on any program that contains a DATA step. To get started using the DATA Step Debugger, you must first enable the DATA Step Debugger and select the valid DATA step code that you want to debug.

- 1 Open your program in the Program Editor and click **Debug** on the toolbar. All sections of DATA step code in the program are highlighted with a green bar in the margin to indicate that they can be debugged.

```

1  proc sort data=sashelp.cars out=cars;
2    by make;
3    run;
4
5  data horsepower;
6    set sashelp.cars(where=(cylinders eq 8)) nobs=numobs;
7    format dollarsPerHorse dollar12.2 runningAveragehorsepower 6.1;
8    retain runninghorses;
9    by make;
10
11   if _n_ eq 1 then
12     runningHorses=0;
13   else runninghorses=runninghorses+horsepower;
14   runningaveragehorsepower=runningHorses/_n_;
15   dollarsPerHorse=invoice/Horsepower;
16   run;
17
18  proc print;
19  run;

```

- Click  in the margin beside the section of code that you want to debug. The DATA step code opens in the DATA Step Debugger window.

Note: You can also open the DATA Step Debugger window by right-clicking in the DATA step code and selecting **Debug DATA step**.

DATA Step Debugger Close

▶ Continue ■ Stop 🔍 ● 🛑

```

1  data horsepower;
2  set sashelp.cars(where=(cylinders eq 8)) nobs=numobs;
3  format dollarsPerHorse dollar12.2 runningAveragehorsepower 6.1;
4  retain runninghorses;
5  by make;
6
7  if _n_ eq 1 then
8    runningHorses=0;
9  else runninghorses=runninghorses+horsepower;
10 runningaveragehorsepower=runningHorses/_n_;
11 dollarsPerHorse=invoice/Horsepower;
12 run;

```

Console

The DATA STEP debugger started successfully.
Stopped at line 2 column 2



> Enter command


Variable	Value	Watch
numobs	428	<input type="checkbox"/>
Make		<input type="checkbox"/>
Model		<input type="checkbox"/>
Type		<input type="checkbox"/>
Origin		<input type="checkbox"/>
DriveTrain		<input type="checkbox"/>
MSRP	.	<input type="checkbox"/>
Invoice	.	<input type="checkbox"/>
EngineSize	.	<input type="checkbox"/>

Setting and Clearing Breakpoints

You can set or clear a breakpoint on any executable line in the program. A breakpoint suspends execution of the program at the specified line. Each time you set or clear a breakpoint, information about the breakpoint is displayed in the Debug Console at the bottom of the window.

To set and clear breakpoints:

- You can toggle a breakpoint on and off by selecting the line and clicking  on the toolbar.
- To clear all breakpoints in the program, click .

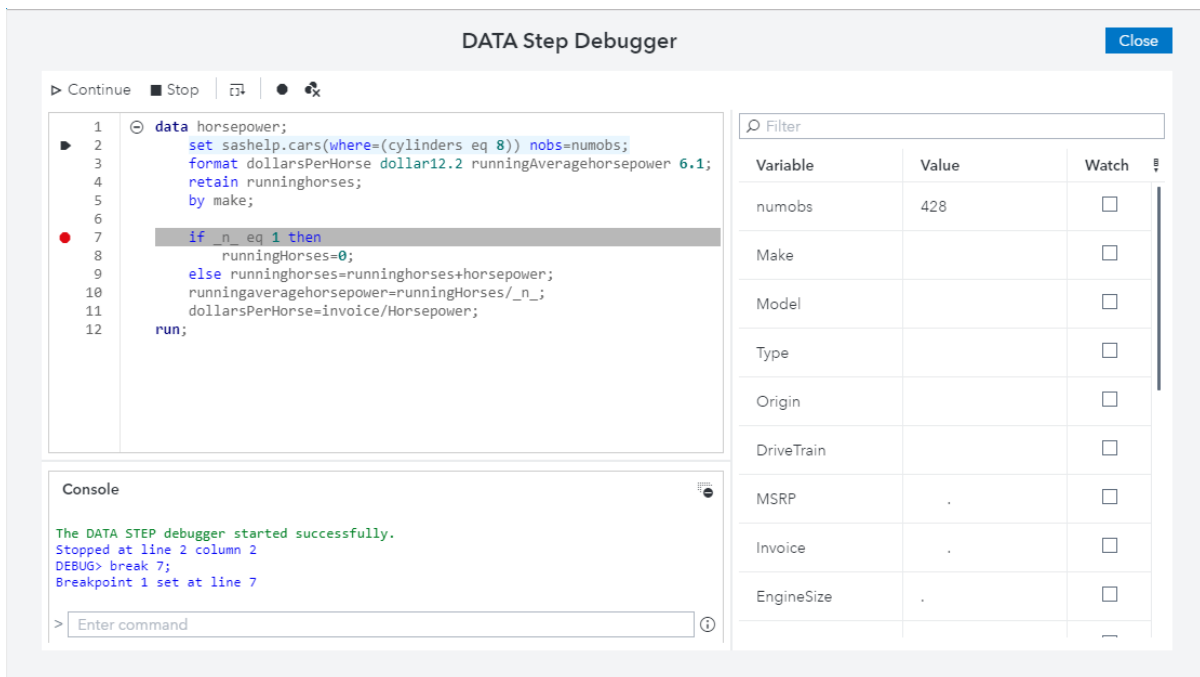

The screenshot shows the DATA Step Debugger interface. The main window displays the following SAS code:

```

1 data horsepower;
2   set sashelp.cars(where=(cylinders eq 8)) nobs=numobs;
3   format dollarsPerHorse dollar12.2 runningAveragehorsepower 6.1;
4   retain runningHorses;
5   by make;
6
7   if _n_ eq 1 then
8     runningHorses=0;
9   else runningHorses=runningHorses+horsepower;
10  runningAveragehorsepower=runningHorses/_n_;
11  dollarsPerHorse=invoice/Horsepower;
12  run;

```

The console shows the following output:

```

The DATA STEP debugger started successfully.
Stopped at line 2 column 2
DEBUG> break 7;
Breakpoint 1 set at line 7
> Enter command


```

The watch table on the right lists the following variables and their values:

Variable	Value	Watch
numobs	428	<input type="checkbox"/>
Make		<input type="checkbox"/>
Model		<input type="checkbox"/>
Type		<input type="checkbox"/>
Origin		<input type="checkbox"/>
DriveTrain		<input type="checkbox"/>
MSRP	.	<input type="checkbox"/>
Invoice	.	<input type="checkbox"/>
EngineSize	.	<input type="checkbox"/>

Executing the Program Step by Step

You can execute the statements in the program one at a time and view the variable values with each step. As you step through your program, any variable values that change are displayed in red.

To execute the statement starting at the point at which execution was suspended, click . Only one statement is executed at a time.

Starting and Stopping Execution of the Program

When you start execution of the program in the DATA Step Debugger, the program runs until it reaches a breakpoint or until the value of a watched variable changes. If no breakpoints or watched variables are specified, the program runs to completion.

- To start or continue execution of the program, click ▶.
- To stop execution of the program, click ■.

Note: You can specify a line in the program at which to restart execution by right-clicking the appropriate line in the program and selecting **Jump**.

Inspecting Variable Values

As you debug a program, you can view the values of each variable in the program. You can view the complete list of variables in the variables pane, and you can use the filter and search box to narrow the list of variables. Variable values that have changed are displayed in red.

The screenshot shows the DATA Step Debugger window with the following components:

- Code Editor:** Contains SAS code for calculating horsepower. Line 7 is highlighted with a play button icon.


```

1 data horsepower;
2 set sashelp.cars(where=(cylinders eq 8)) nobs=numobs;
3 format dollarsPerHorse dollar12.2 runningAveragehorsepower 6.1;
4 retain runninghorses;
5 by make;
6
7 if _n_ eq 1 then
8   runningHorses=0;
9 else runninghorses=runninghorses+horsepower;
10 runningaveragehorsepower=runningHorses/_n_;
11 dollarsPerHorse=invoice/Horsepower;
12 run;
      
```
- Console:** Shows the execution steps:


```


>>>> step;
Stepped to line 12 column 1
DEBUG> step;
Stepped to line 2 column 2
DEBUG> step;
Stepped to line 7 column 2
      
```
- Variables Pane:** Displays a table of variables and their values. The 'Model' variable value 'A8 L Quattro 4dr' is highlighted in red, indicating a change.

Variable	Value	Watch
numobs	428	<input type="checkbox"/>
Make	Audi	<input type="checkbox"/>
Model	A8 L Quattro 4dr	<input type="checkbox"/>
MSRP	\$69,190	<input type="checkbox"/>
MPG_City	17	<input type="checkbox"/>
MPG_Highway	24	<input type="checkbox"/>
FIRST.Make	0	<input type="checkbox"/>
LAST.Make	0	<input type="checkbox"/>

Watching a Variable Value

You can watch any variable in the program. SAS suspends execution of the program whenever the value of a watched variable changes. Variable values that have changed are displayed in the variables pane in red.

To watch a variable, select the check box for the variable in the variables pane.

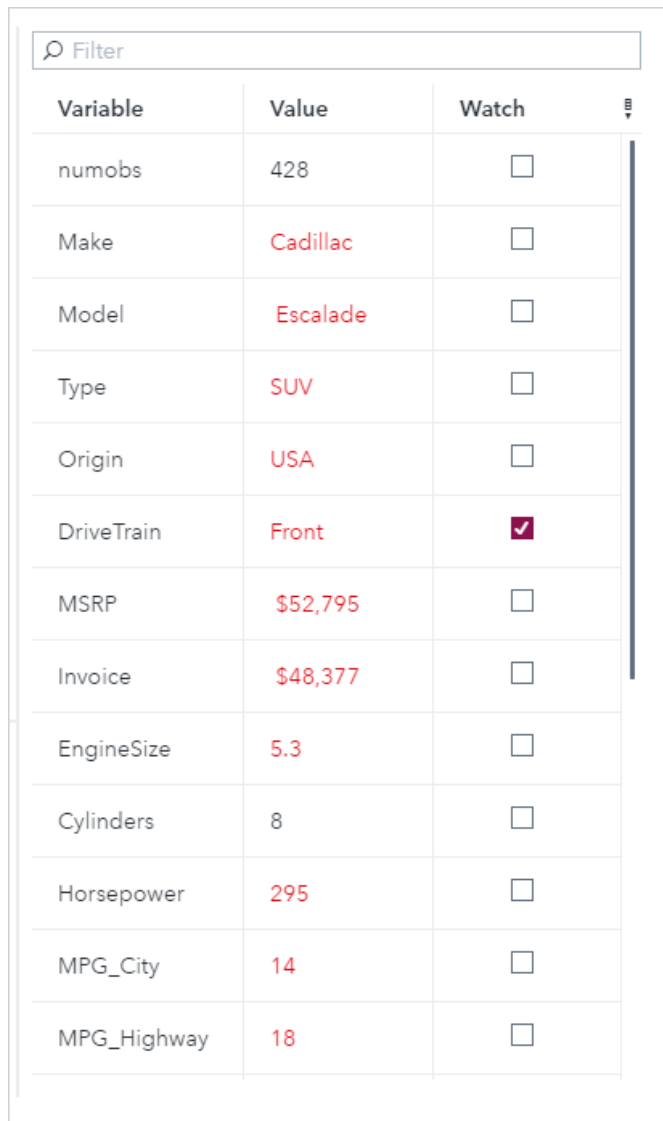

The screenshot shows the Variables pane in the SAS Data Step Debugger. It features a search filter at the top and a table with three columns: Variable, Value, and Watch. The 'Value' column contains red text, indicating that these values have changed. The 'Watch' column contains checkboxes, with the checkbox for 'DriveTrain' checked.

Variable	Value	Watch
numobs	428	<input type="checkbox"/>
Make	Cadillac	<input type="checkbox"/>
Model	Escalade	<input type="checkbox"/>
Type	SUV	<input type="checkbox"/>
Origin	USA	<input type="checkbox"/>
DriveTrain	Front	<input checked="" type="checkbox"/>
MSRP	\$52,795	<input type="checkbox"/>
Invoice	\$48,377	<input type="checkbox"/>
EngineSize	5.3	<input type="checkbox"/>
Cylinders	8	<input type="checkbox"/>
Horsepower	295	<input type="checkbox"/>
MPG_City	14	<input type="checkbox"/>
MPG_Highway	18	<input type="checkbox"/>


Debugging with the Command Line

You can use the command line to enter debugger commands directly. To view a list of valid commands, click ⓘ.

Note: For more information about DATA Step debugger commands, see “[Debugger Commands Overview](#)” in *SAS Code Debugger: User’s Guide*.

For example, you can use the command line to set a conditional breakpoint so that execution of the program is stopped when a specified condition is met. The following example uses this debugger command to set a breakpoint at line 11 when the value of the variable `_n_` is 10:

```
break 11 when _n_ eq 10
```

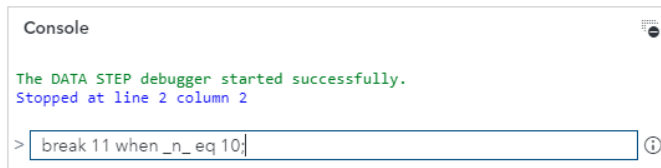

A breakpoint is set at line 11, and the program execution stops when the value of `_n_` is 10.

The screenshot shows the "DATA Step Debugger" window. The main pane displays the following SAS code:

```

1 data horsepower;
2 set sashelp.cars(where=(cylinders eq 8)) nobs=numobs;
3 format dollarsPerHorse dollar12.2 runningAveragehorsepower 6.1;
4 retain runningHorses;
5 by make;
6
7 if _n_ eq 1 then
8   runningHorses=0;
9 else runningHorses=runningHorses+horsepower;
10 runningAveragehorsepower=runningHorses/_n_;
11 dollarsPerHorse=invoice/Horsepower;
12 run;

```

The console shows the following output:

```

The DATA STEP debugger started successfully.
Stopped at line 2 column 2
DEBUG> break 11 when _n_ eq 10;
Breakpoint 1 set at line 11
DEBUG> go;
Break at line 11 column 2

```

On the right side, there is a table of variables and their values:

Variable	Value	Watch
numobs	428	<input type="checkbox"/>
Make	Cadillac	<input type="checkbox"/>
Model	Escalade	<input type="checkbox"/>
Type	SUV	<input type="checkbox"/>
Origin	USA	<input type="checkbox"/>
DriveTrain	Front	<input type="checkbox"/>
MSRP	\$52,795	<input type="checkbox"/>
Invoice	\$48,377	<input type="checkbox"/>
EngineSize	5.3	<input type="checkbox"/>
Cylinders	8	<input type="checkbox"/>
Horsepower	295	<input type="checkbox"/>
MPG_City	14	<input type="checkbox"/>
MPG_Highway	18	<input type="checkbox"/>

Working with Snippets

Why Use Snippets?

Snippets are lines of commonly used code or text that you can save and reuse. Snippets can contain SAS code, XML code, and text. You can insert snippets in locations including the Program Editor, XML editor, text editor, flows, job definitions, job forms, and job prompts. SAS Studio is shipped with several code snippets.

Snippet Name	Description
Standard > Data	
DS2 Code	Provides a template for a DS2 program. DS2 is a SAS programming language that is appropriate for advanced data manipulation. DS2 is included with Base SAS and shares core features with the SAS DATA step. DS2 exceeds the DATA step by adding variable scoping, user-defined methods, ANSI SQL data types, and user-defined packages. The DS2 SET statement accepts embedded FedSQL syntax, and the run-time-generated queries can exchange data interactively between DS2 and any supported database. This allows SQL preprocessing of input tables, which effectively combines the power of the two languages. For more information, see <i>SAS DS2 Language Reference</i> .
DS2 Package	Provides a template for a DS2 package. A package is similar to a DS2 program. The package body consists of a set of global declarations and a list of methods. The main syntactical differences are the PACKAGE and ENDPACKAGE statements. These statements define a block with global scope. For more information, see <i>SAS DS2 Language Reference</i> .
DS2 Thread	Provides a template for a DS2 threaded program. Typically, DS2 code runs sequentially. That is, one process runs to completion before the next process begins. It is possible to run more than one process concurrently, using threaded processing. In threaded processing, each concurrently executing section of code is said to be running in a thread. For more information, see <i>SAS DS2 Language Reference</i> .

Snippet Name	Description
Generate CSV File	Creates a CSV version of a SAS data set in the file that is specified in the FILENAME statement. The file name should be fully qualified and end with .csv.
Generate PowerPoint Slide	Uses PROC SGPLOT to create Microsoft PowerPoint output in the file that is specified in the FILENAME statement. The file name should be fully qualified and end with .ppt.
Generate XML File	Creates an XML version of a SAS data set in the directory that is specified in the FILENAME statement. The directory name should be fully qualified.
Import CSV File	Imports a comma-separated file from the location that is specified in the FILENAME statement and writes the output to a SAS data set.
Import XLSX File	Imports an XLSX file from the location that is specified in the FILENAME statement and writes the output to a SAS data set.
Simulate Linear Regression Data	Creates an input data source that you can use for linear regression analysis. Linear regression analysis tries to assign a linear function to your data by using the least squares method.
Simulate One-Way ANOVA Data	Creates an input data source that considers one treatment factor with three treatment levels. When you analyze this data by using the One-Way ANOVA task, the goal is to test for differences among the means of the levels and to quantify these differences.
Standard > Data Quality	
Note: Data preparation is required to use the data quality snippets. For more information, see SAS Data Quality: Getting Started	
Apply Schemes	Shows how to apply a scheme stored in SAS format using the DQSCHHEMEAPPLY function, the DQSCHHEMEAPPLY CALL routine, or the DQSCHHEME procedure. Schemes enable you to standardize irregular entries in the data so that this data can be used for reporting.
Calculate Matchcodes	Uses the DQMATCH function to generate a match code from a character value. The match codes reflect the relative similarity of data values. Match codes are based on a specified match definition in a specified locale. The match codes are written to an output SAS data set. Values that generate the same match codes are candidates for transformation or standardization.

Snippet Name	Description
Case Data	Uses the DQCASE function to transform a character constant (according to the specified case definition) and return a character value with standardized capitalization.
Cluster (Entity Resolution) – Proc DQMATCH	Runs the DQMATCH procedure to generate match codes and create cluster numbers with multiple criteria statements. PROC DQMATCH creates match codes as a basis for standardization or transformation. The match codes reflect the relative similarity of data values. Match codes are created based on a specified match definition in a specified locale. The match codes are written to an output SAS data set. Values that generate the same match codes are candidates for transformation or standardization.
Extract Data	Uses the DQEXTRACT and DQEXTTOKENGET functions. The DQEXTRACT function returns a delimited string of extraction token values from an input character value that are detected by the extraction definition. The DQEXTTOKENGET function returns an extraction token value from a delimited string of extraction token values.
Guess Locale	Uses the DQLOCALEQUSS function to apply the input character value to the locale-guess definition that are listed in the DQLOCALE= system option or session option. The function returns the name of the locale.
Identify Gender	Uses the DQGENDER function to return a gender from the name of an individual.
Parse Data	Uses the DQPARSE function to return a delimited string of parse token values and the QPARSETOKENGET function to return a parse token value from a delimited string of parse token values.
Perform Identification Analysis	Shows how to perform identification analysis using DQIDENTIFYINFOGET, DQIDENTIFYMULTI, and DQIDENTIFYIDGET functions. <ul style="list-style-type: none"> ■ The DQIDENTIFYINFOGET function returns a list of names that are supported by a given identification analysis definition. ■ The DQIDENTIFYMULTI function returns all of the identification analysis of a character value. ■ The DQIDENTIFYIDGET function returns a list of identity names.

Snippet Name	Description
Run Data Profiling – Proc DATAMETRICS	Shows how to apply data profiling to a data set by using the DATAMETRICS procedure with or without the MULTIIDENTITY= argument that is specified in the IDENTITIES statement.
Standardize Data	Uses the DQSTANDARDIZE function to standardize the casing, spacing, and format of an input character value and return an updated character value.
Standard > Descriptive	
Custom ODS Output	Provides a template for creating HTML, PDF, and RTF output by using the SAS Output Delivery System. For more information, see <i>SAS Output Delivery System: User's Guide</i> .
PROC SQL	Provides a template for writing SQL queries. For more information, see <i>SAS SQL Procedure User's Guide</i> .
Standard > Graph	
Note: For more information about the SGPLOT, SGPANEL, and SGSCATTER procedures, see SAS ODS Graphics: Procedures Guide .	
Bar Panel	Uses the VBAR statement in the SGPANEL procedure and enables you to create multiple bar charts.
Box Panel	Uses the VBOX statement in the SGPANEL procedure and enables you to create multiple box plots.
Comparative Scatter Plot	Uses the COMPARE statement in the SGSCATTER procedure. This code snippet creates a comparative panel of scatter plots with shared axes.
Dot Plot	Uses the DOT statement in the SGPLOT procedure. Dot plots summarize horizontally the values of a category variable. By default, each dot represents the frequency for each value of the category variable.
Fit Plot	Uses the REG statement in the SGPLOT procedure. This code snippet produces a regression plot with a quadratic fit and includes confidence limits.
HBar Plot	Uses the HBAR statement in the SGPLOT procedure. This code snippet creates a horizontal bar chart that summarizes the values of a category variable.
HighLow Plot	Uses the HIGHLOW statement in the SGPLOT procedure. High-low charts show how several values of one variable relate to one value of another variable.

Snippet Name	Description
	Typically, each variable value on the horizontal axis has several corresponding values on the vertical axis.
Histogram Plot	Uses the HISTOGRAM statement in the SGPLOT procedure. This code snippet produces a histogram with two density plots. In this snippet, one density plot uses a normal density estimate and the other density plot uses a kernel density estimate.
Scatter Plot Matrix	Uses the MATRIX statement in the SGSCATTER procedure. This code snippet creates a scatter plot matrix.
VBox Plot	Uses the VBOX statement in the SGPLOT procedure. A box plot summarizes the data and indicates the median, upper and lower quartiles, and minimum and maximum values. The plot provides a quick visual summary that easily shows center, spread, range, and any outliers. The SGPLOT and the SGPANEL procedures have separate statements for creating horizontal and vertical box plots.

Standard > IML

Note: These snippets are available only if your site licenses SAS/IML.

Find Roots of Nonlinear Equation	Enables you to find the roots of a function of one variable. Finding the root (or zero) of a function enables you to solve nonlinear equations.
Fit by using Maximum Likelihood	Uses maximum likelihood estimation to estimate parameters for the normal density estimate.
Generate a Bootstrap Distribution	Uses the IML procedure to create and analyze a bootstrap distribution of the sample mean.
Integrate a Function	Enables you to numerically integrate a one-dimensional function by using the QUAD subroutine in SAS/IML software. Use the QUAD subroutine to numerically find the definite integral of a function on a finite, semi-infinite, or infinite domain.
Simulate Multivariate Normal Data	Simulates data from a multivariate normal distribution with a specified mean and covariance.

Standard > Macro

Note: For more information about SAS macros, see [SAS Macro Language: Reference](#).

SAS Macro	Provides a basic template for working with SAS macros. Macros enable you to perform many tasks, including substituting text in a program. A SAS
-----------	---

Snippet Name	Description
	<p>program can contain any number of macros, and you can invoke a macro multiple times in a single program. For more information, see <i>SAS Macro Language: Reference</i>.</p>
SAS Macro Char Functions	<p>Provides several examples of these SAS macros that work with character values:</p> <ul style="list-style-type: none"> ■ The %EVAL function evaluates arithmetic and logical expressions by using integer arithmetic. This function operates by converting its argument from a character value to a numeric or logical expression. After the expression is evaluated, the result is converted back to a character value. <p>This function is useful because the SAS Macro Facility is basically a text generator. As a result, an arithmetic expression is first converted to a numeric expression. After this numeric expression is evaluated, it is converted back to an arithmetic expression.</p> <ul style="list-style-type: none"> ■ The %INDEX function returns the position of the first character of a string. ■ The %LENGTH function returns the length of a string. ■ The %SCAN function searches for a word that is specified by its position in a string. ■ The %SUBSTR function produces a substring of a character string. ■ The %UPCASE function converts values to uppercase.
SAS Macro Do Statement	<p>Designates the beginning of a section of a macro definition that is treated as a unit until a matching %END statement is encountered. This macro section is called a %DO group.</p> <p>A simple %DO statement often appears in conjunction with %IF-%THEN-%ELSE statements to designate a section of the macro to be processed depending on whether the %IF condition is true or false.</p> <p>Note: SAS also provides a %DO iterative statement, which is different from the code that is generated by this snippet. For more information, see <i>SAS Macro Language: Reference</i>.</p>
SAS Macro If Statement	<p>Conditionally processes a portion of a macro. The expression that is the condition for the %IF-%THEN-%ELSE statement can contain only operands that are constant text or text expressions that generate text.</p>
SAS Macro Parameters	<p>Names one or more local macro variables whose values you specify when you invoke the macro. There</p>

Snippet Name	Description
	<p>are two types of macro variables: positional and keyword. Parameters are local to the macro that defines them. You must supply each parameter name. You cannot use a text expression to generate it. A parameter list can contain any number of macro parameters separated by commas. The macro variables in the parameter list are usually referenced in the macro.</p>
SAS Macro Quoting	<p>Provides examples of macro functions that tell the macro processor to interpret special characters and mnemonics as text rather than as part of the macro language.</p> <ul style="list-style-type: none"> ■ The %STR function masks special characters and mnemonic operators in constant text at macro compilation. This function masks these special characters and mnemonic operators: + - * / < > = ~ ^ ~ ; , # blank AND OR NOT EQ NE LE LT GE GT IN <p>This function also masks these characters when they occur in pairs and when they are not matched and are marked by a preceding %: ' " ()</p> ■ The %NRSTR function masks special characters and mnemonic operators in constant text at macro compilation. This function masks all of the special characters and mnemonic operators listed for the %STR function. In addition, the %NRSTR function masks these characters: & % ■ The %BQUOTE function masks special characters and mnemonic operators in a resolved value at macro execution. This function masks these special characters and mnemonic operators: ' " () + - * / < > = ~ ^ ~ ; , # blank AND OR NOT EQ NE LE LT GE GT IN ■ The %SUPERQ function masks all special characters and mnemonic operators at macro execution but prevents further resolution of the value. This function masks these special characters and mnemonic operators: & % ' " () + - * / < > = ~ ^ ~ ; , # blank AND OR NOT EQ NE LE LT GE GT IN ■ The %QSCAN function searches for a word and masks special characters and mnemonic operators. ■ The %QSUBSTR function produces a substring and masks special characters and mnemonic operators. ■ The %QUPCASE function converts a value to uppercase and returns a result that masks special characters and mnemonic operators.

Snippet Name	Description
	<ul style="list-style-type: none"> ■ The %UNQUOTE function un.masks a value during macro execution so that any special characters and mnemonic operators are interpreted as macro language elements instead of text. <p>For more information about macro complication and macro execution, see <i>SAS Macro Language: Reference</i>.</p>
SAS Macro Variables	<p>Provides examples of how to create user-defined global and local macro variables. Macro variables are tools that enable you to dynamically modify the text in a SAS program through symbolic substitution. You can assign large or small amounts of text to macro variables. Then you can use that text by simply referencing the variable that contains the text.</p> <p>Macro variables that are defined by the macro programmer are called user-defined macro variables. Macro variables that are defined by the macro processor are called automatic macro variables. You can define and use macro variables anywhere in SAS programs, except within data lines.</p>
Viya Foundation > Cloud Analytic Services	
Create CAS Connection	Creates a connection to a CAS server. You must specify values for the CASHOST= and CASPORT= system options. The CAS statement connects the default session to the specified CAS server and CAS port.
Delete caslib	Deletes the specified caslib.
Delete Table or File from caslib	Deletes a table or file from the caslib. You can also remove an in-memory table.
Disconnect CAS Session	Disconnects from the CAS session named mySession. Before you disconnect, you can specify a value for the time-out (in seconds). You can reconnect to the session before the time-out expires. Otherwise, the session is terminated.
Generate SAS librefs for caslibs	Creates a default CAS session and generates SAS librefs for existing caslibs so that the librefs are visible in the Libraries pane.
List CAS Session Options	Lists session options for the specified CAS session.
List CAS Sessions for SAS Client	Lists all the CAS sessions and session properties that are created by the SAS client or reconnected to by the SAS client.

Snippet Name	Description
List CAS Sessions for User ID	Lists all the CAS sessions that are known to the CAS server for the user ID that is associated with <code>yourSessionName</code> .
Load Data to caslib	Loads a table to the specified caslib. The snippet includes the PROMOTE option so that the loaded data is available to all your active sessions.
New CAS Session	Starts a new CAS session named <code>mySession</code> using the existing CAS server connection. When starting a new session, you can specify the caslib to use, the time-out (in seconds) for the session, and the locale of the session.
New caslib for Path	Creates a caslib (<code>myCaslib</code>) for the specified path (<code>/filePath/</code>) and session (<code>mySession</code>). If you omit the SESSREF= option, the caslib is created and activated for the current session. The SUBDIRS option extends the scope of <code>myCaslib</code> to include subdirectories of (<code>/filePath/</code>). The LIBNAME statement creates a SAS libref for the caslib.
Reconnect CAS Session	Reconnects to a CAS session named <code>mySession</code> .
Save Table to caslib	Creates a permanent copy of an in-memory table (<code>table-name</code>) from <code>sourceCaslib</code> . The in-memory table is saved to the data source that is associated with the target caslib <code>targetCaslib</code> using the specified name (<code>filename</code>). Note: You can determine the caslib that is associated with a CAS engine libref by right-clicking the libref in the Libraries pane and selecting Properties. The Server Session CASLIB field displays the caslib.
Terminate CAS Session	Terminates the CAS session named <code>mySession</code> . No reconnection is possible.
Viya Foundation > Image Processing	
You must license and install SAS Visual Data Mining and Machine Learning to use these snippets.	
Convert Color	Converts the color space of one or more images. You can specify any of these values for the TYPE parameter: 'BGR2HSV', 'BGR2RGB', 'BGR2YUV', 'COLOR2GRAY', 'GRAY2COLOR', 'HSV2BGR', 'RGB2BGR', or 'YUV2BGR'. The input is a CAS table that contains the images that you want to convert, and the output is a CAS table that contains the converted images.

Snippet Name	Description
Display Image	<p>Displays an image that is saved from SAS Studio to your computer. This snippet creates an annotation data set that contains a reference to the image and uses PROC SGPLOT to display the image. Use the IMAGE= variable to specify the fully qualified name and location of the image that you want to display. The SAS server must be able to access this location.</p>
Load Images	<p>Loads the image action set from the specified path and creates a CAS table. The path parameter points to the directory that contains the images that you want to load. The path parameter is a subdirectory in the caslib directory where the images are stored.</p> <p>A typical workflow includes loading images and then processing them by using one of the other snippets to resize, rescale, or mutate them. The output from one snippet can be used as input for another snippet. Images can be saved to your computer for further processing by using the Save Images snippet.</p>
Mutate Images	<p>Mutates one or more images using different augmentation techniques. You can specify any of these values for the TYPE parameter: 'COLOR_JITTERING', 'COLOR_SHIFTING', 'DARKEN', 'HORIZONTAL_FLIP', 'INVERT_PIXELS', 'LIGHTEN', 'ROTATE_LEFT', 'ROTATE_RIGHT', 'SHARPEN', or 'VERTICAL_FLIP'. The input is a CAS table that contains the images that you want to change, and the output is a CAS table that contains the mutated images.</p>
Rescale Images	<p>Changes the depth of one or more images based on the options that you specify. You can specify any of these values for the TYPE parameter: "TO_8U", "TO_32F", or "TO_64F". You can also use the ALPHA and BETA parameters to scale the values. The input is a CAS table that contains the images that you want to rescale, and the output is a CAS table that contains the rescaled images.</p>
Resize Images	<p>Resizes one or more images based on the HEIGHT and WIDTH parameters that you specify. The HEIGHT parameter corresponds to the number of rows, and the WIDTH parameter corresponds to the number of columns. The input is a CAS table that contains the images that you want to resize, and the output is a CAS table that contains the resized images.</p>
Save Images	<p>Saves the specified images to the specified subdirectory of a previously defined caslib, such as CASUSER. You must specify the name of a subdirectory in the caslib root directory. The names of</p>

Snippet Name	Description
	the saved images start with the value of the PREFIX parameter.
Viya Foundation > Machine Learning	
You must license and install SAS Visual Statistics to use these snippets.	
Compare Several ML Algorithms	Demonstrates fitting and comparing several Machine Learning algorithms for predicting the binary target in the Hmeq data set, which is included in the Machine Learning sample data library. You must run the Load Data and Prepare and Explore Data snippets before you run this snippet.
Compare Two ML Algorithms	Demonstrates fitting and comparing two Machine Learning algorithms for predicting the binary target in the Hmeq data set, which is included in the Machine Learning sample data library. You must run the Load Data and Prepare and Explore Data snippets before you run this snippet.
Generalized Linear Models	Demonstrates fitting and assessing generalized linear models using the GENSELECT procedure. You must run the Load Data and Prepare and Explore Data snippets before you run this snippet.
Load Data	Demonstrates how to load local data into CAS.
Prepare and Explore Data	<p>Modifying, and preparing data prior to modeling. This snippet uses the Hmeq data set from the Machine Learning sample data library. The Hmeq data set is used as input and creates the Hmeq_prepped data set. The Hmeq_prepped data set is used in subsequent examples.</p> <p>Note: You might see a warning message about missing values when you run this snippet. The sample data includes some missing values that can be used by other procedures.</p>
Supervised Learning	Shows the entire workflow process, including data exploration and preparation, modeling, and evaluation. This snippet uses the Sample1.Hmeq data set, which is included in the Machine Learning sample data library.
Unsupervised Learning	Shows the entire workflow process, including data preparation, analysis, and visualization of the results. This snippet uses the Sashelp.Iris data set.


Create a Snippet

To create your own snippet:

- 1 Open a file in SAS Studio and select the lines or code or text that you want to save as a snippet. If you do not select any lines of code or text, the entire file is saved as a snippet.
- 2 On the toolbar, click **Copy to My Snippets**.

Note: You can also copy a snippet to the **Explorer** section in the navigation pane. Right-click an existing snippet in the **Snippets** section in the navigation pane and **Copy snippet to** ⇒ **Explorer**. The snippet is saved as a *.csm file in the folder that you specify.


- 3 Enter a name for the snippet.
- 4 If you want to quickly access the snippet by entering *@snippet-abbreviation* in the Program Editor, enter an abbreviation for the snippet. You can also add a description.
- 5 Select the folder in which you want to save the snippet and click **OK**. The snippet is added to the folder that you specified.

Note: You can also upload existing snippet files to your **My Snippets** folder and subfolders. The file type must be *.csm. Select the folder that you want to use and click . Click  to browse for the file, and then click **Upload**.


To add a saved *.sas file to your **My Snippets** folder, right-click the .sas file in the **Explorer** section in the navigation pane and select **Copy to My Snippets**.

How to Insert a Code Snippet

To insert a snippet:

- 1 Click the location where you want to insert the snippet.
- 2 In the navigation pane, click  to open the Snippets section.
- 3 You can add a snippet to your file in these ways:
 - use a drag-and-drop operation to insert the snippet into your file.
 - right-click the name of the snippet and select **Insert into code**.
 - right-click in the file and select **Insert snippet**, and then select the snippet that you want to use.

- enter `@snippet-name` in your code and press Enter. You can also enter `@` and use the pop-up window to select from a list of snippets in your My Snippets folder.

Note: In order to use this functionality, you must specify an abbreviation for the snippet. To verify whether your snippet has an abbreviation, select the snippet and click . To add or edit the abbreviation, right-click the snippet and select **Edit**. For more information, see [“Create a Snippet” on page 76](#). You must also select the **Enable snippet abbreviations** preference. For more information, see [“Setting Editors Preferences” on page 188](#).

Customizing the Code Editor

The Preferences window enables you to change several options that affect the features in the code editor, including autocompletion and color coding.

To access the editor options, select **Options** ⇒ **Preferences**. Click **Editors**.

For more information, see [“Setting Editors Preferences” on page 188](#).

Working with Queries

<i>What Is a Query?</i>	80
<i>Understanding the Differences between a Stand-Alone Query and a Flow Query</i>	80
<i>Migrating a Saved Query from an Earlier Version of SAS Studio</i>	81
<i>Creating a Stand-Alone Query</i>	82
Creating a Query	82
Adding Tables to a Query	83
<i>Understanding Joins</i>	84
Joining Tables	84
Creating a Join	84
Editing Table Properties in a Query	86
Understanding the Types of Joins	86
Modifying an Existing Join	87
<i>Selecting Data</i>	88
Specifying Columns in the Output	88
Creating a Calculated Column	91
Using Summary Functions	92
Working with Conditional Expressions	94
<i>Filtering Data</i>	95
Creating a Filter	95
Changing the Relationship between Filter Expressions	98
<i>Managing Output</i>	99
Sorting Your Output	99
Eliminating Duplicate Rows in Output	100
Grouping Your Output	100
Subsetting Grouped Data	104
Saving Your Results	105
Specifying Limits for Input Processing	106
Specifying Limits for Output Processing	107
Specifying Pass-Through and Table Options	107
Adding a Note to a Query	109
Running a Query	109
<i>Generating a FedSQL Query</i>	110

What Is a Query?

A *query* enables you to extract data from one or more tables according to criteria that you specify. You can create a query that is based on only one table, or you can join tables. When you create a query, SAS Studio generates Structured Query Language (SQL) code, which you can view and edit. You can also choose to generate your query using the FEDSQL procedure. For more information, see [“Generating a FedSQL Query” on page 110](#).

Note: Queries are available only in the Standard perspective. For more information, see [“Understanding Perspectives” on page 31](#).

Understanding the Differences between a Stand-Alone Query and a Flow Query

You can create both stand-alone queries that you can run individually as well as queries within a flow that can be run only as part of the flow. Not all query functionality is available if you are running a query in a flow. For more information, see [“What Is a Flow?” in SAS Studio: Working with Flows](#).

The differences between stand-alone and flow queries can be viewed in the following table:

Query Feature	Stand-Alone Query	Flow Query
Output options		
Table	Yes.	Yes.
View	Yes, unless the query uses PROC FEDSQL.	No.
Report	Yes.	No.
Options to specify library and table name	Yes.	No. To specify the library and table name, you must add a Table node to the flow.

Query Feature	Stand-Alone Query	Flow Query
Columns area		
Options to add and remove tables	Yes.	No.
Option to view table properties	Yes.	No. You can update only the table alias.
Select tab		
Ability to specify a format for a column	Yes.	Yes, unless the query uses PROC FEDSQL.
Expression Builder		
Ability to display a list of column values	Yes.	No.
Option to validate syntax and view validation log	Yes.	No.
Preferences		
Ability to apply preferences to a query	Yes.	No.
Save options		
Ability to save the query as a separate file	Yes. The query can be saved as a *.cqy file.	No. You can save the query only as part of the flow.

Migrating a Saved Query from an Earlier Version of SAS Studio

Saved queries from earlier versions of SAS Studio can be run in SAS Studio 2020.1 and later if the following criteria are met:

- The data that was used in the original query is available in SAS Studio 2020.1 and later.
- The data that is available in SAS Studio 2020.1 and later is not missing any columns that were used in the original query.
- All tables that are included in the original query must have a defined join.

Note: When you first save a query from an earlier version of SAS Studio in SAS Studio 2020.1 and later, the Save As window opens. If you save the migrated query with the same name as the earlier version, you can no longer open the query in an earlier version of SAS Studio.

If a saved query cannot be migrated, SAS Studio converts the query to a program file and includes a note in the program that explains why the query could not be migrated.

Creating a Stand-Alone Query

Creating a Query


On the main SAS Studio toolbar, select **New** ⇒ **Query**.

Note: You can also create a query by right-clicking one or more tables in the **Libraries** section in the navigation pane and selecting **Create query**.

Note: For more information, see [“Query” in SAS Studio: Working with Flows](#).


By default, the Query tab contains three main areas:

Columns area	provides access to the tables and columns in your query.
query definition area	enables you to specify and group columns in the query, create joins between tables, filter the data in the query, sort the output, and specify output options.
Code, Log, and Results area	the Code tab displays the code that is automatically generated as you build the query. The Log tab displays the query log when you run the query. If your output type is <code>Table</code> or <code>View</code> and you are generating your code using PROC SQL, an Output Data tab is added to this area when you run the query. If your output type is <code>Report</code> , a Results tab is added to this area when you run the query.

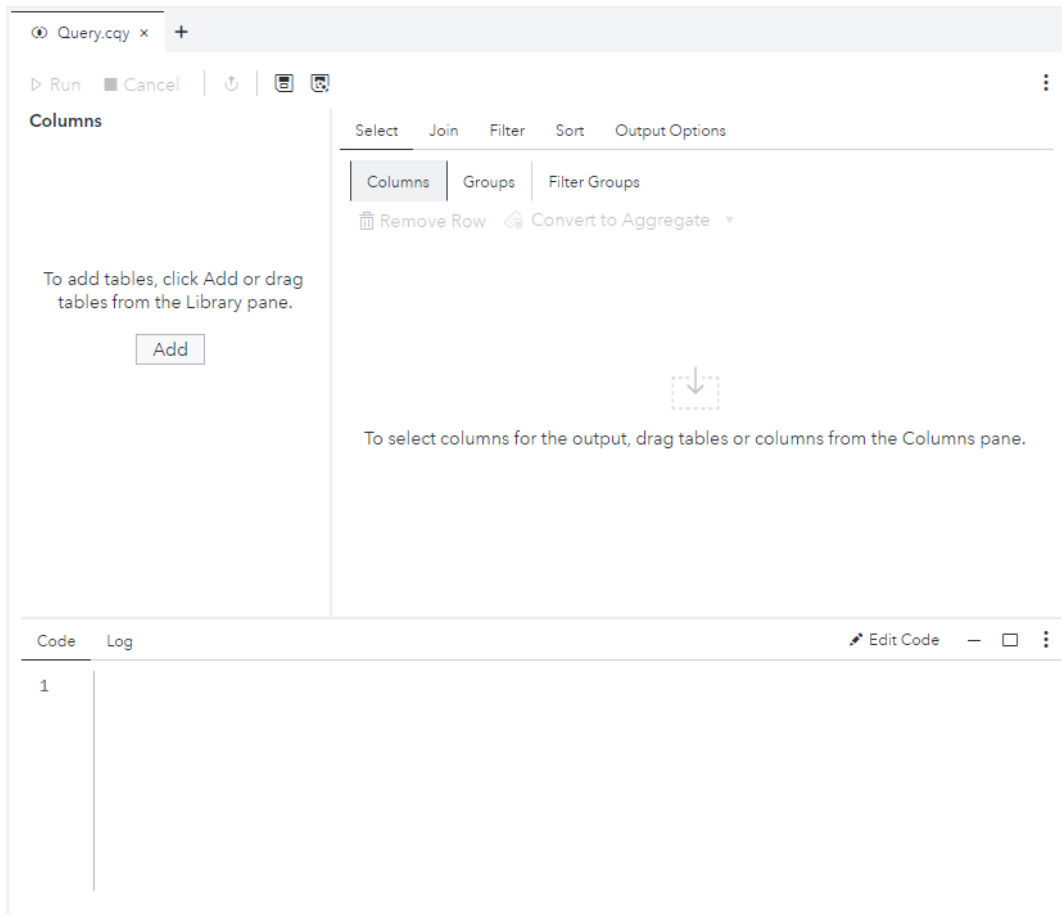

Adding Tables to a Query

In the Columns area of the Query tab, click **Add**. Use the Select Table window to browse for the library and one or more tables that you want to use, and click **OK**.

Note: You can also add tables to the query by using the **Libraries** section in the navigation pane. Click  in the navigation pane to open the **Libraries** section and expand the appropriate library. Drag one or more tables to the Columns area of the Query tab.

Understanding Joins


Joining Tables

When you create a query, you can join multiple tables. SAS Studio can automatically join the tables for you, or you can manually create the join. When you join two tables, SAS Studio attempts to join the tables by columns that have the same name and type. If no matches for column name and type are found, the tables are joined using the first column in each table. If this is not the correct join for your query, you can edit the join and specify the join criteria that you want to use.


Creating a Join

When you add a table to an existing table in your query, SAS Studio automatically creates a join for you.

To add another table to your query, click **Add** in the Columns area of the Query tab. Use the Select Table window to browse for the library and table that you want to use and click **OK**. You can also drag a table from the **Libraries** section in the navigation pane to the Columns area.

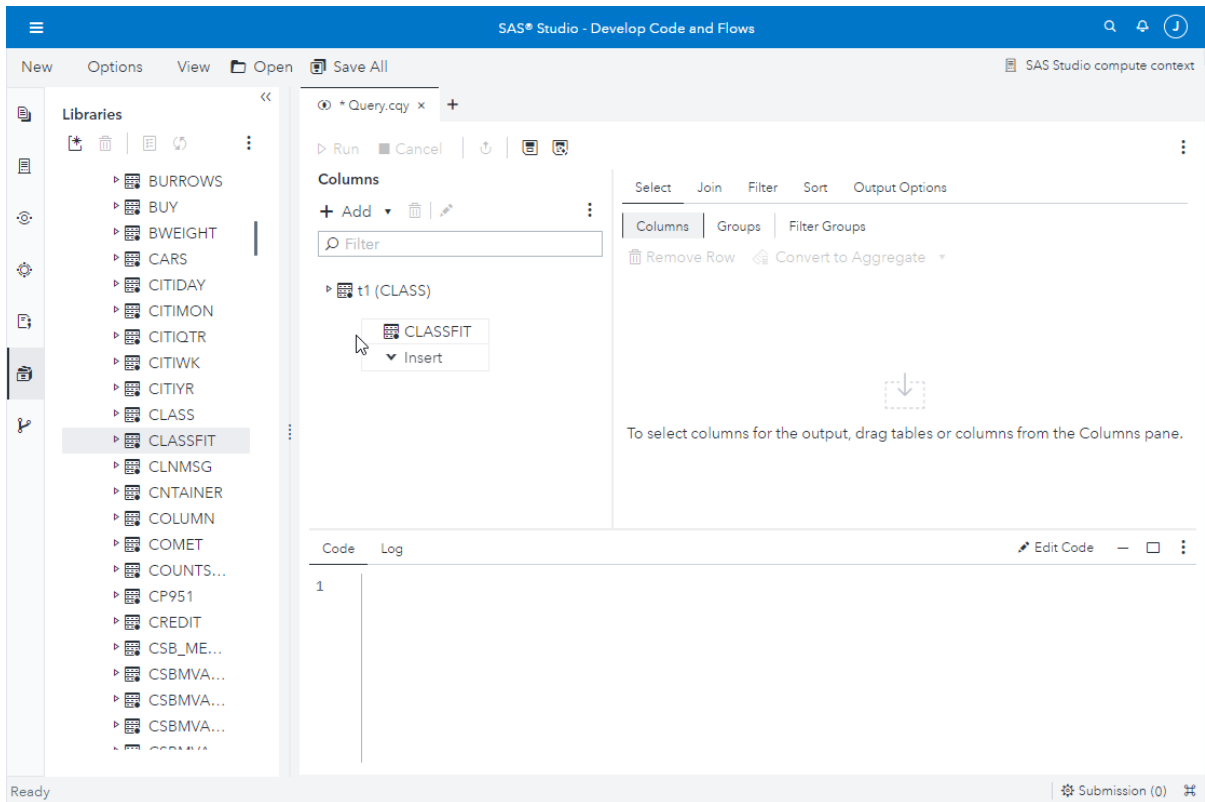

Click the **Join** tab to view the join criteria. In the following example, the Classfit table is automatically joined to the Class table by using the Name column in both tables.

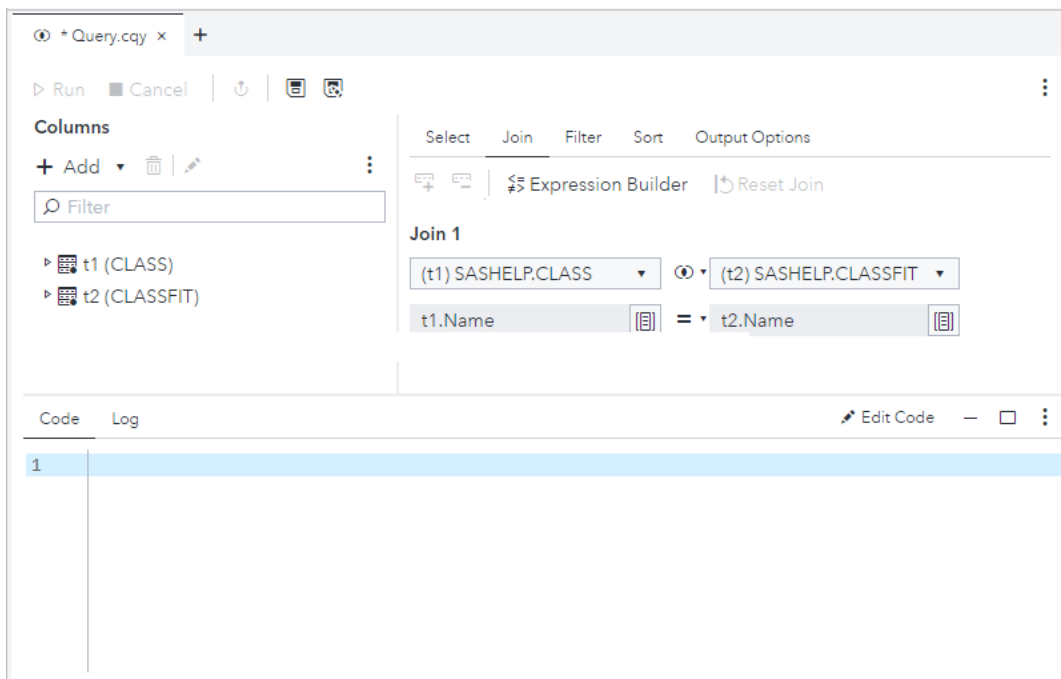

If a suitable join cannot be created automatically, you can specify the join condition manually. For more information, see [“Modifying an Existing Join” on page 87](#).

Editing Table Properties in a Query

You can create an alias for a table in a query.

To specify an alias:

- 1 In the left pane of the Query tab, right-click the table that you want to change and select **Properties**.
- 2 In the **Alias** box, enter the alias for the table.





.....
Note: Alias names must be unique within a query.

- 3 Click **OK** in the Properties window to close the window and save your changes. The alias is displayed in the list of tables on the Query tab.

Understanding the Types of Joins

SAS Studio supports four different types of joins. You can select the type of join you want by modifying an existing join.

You can select the join option that you want to use in the Join window.




SAS Studio Join Type	Join Icon	Description
Inner join		The output rows include only those for which the column in the first table matches the joining criterion of the column in the second table. Joins are inner joins by default.
Left join		The output rows include all rows from the first table and the rows from the second table in which the joining criterion is met.
Right join		The output rows include all rows from the second table and the rows from the first table in which the joining criterion is met.
Full join		The output rows include all matching and nonmatching rows from both tables.

Modifying an Existing Join

You can modify an existing join by selecting a different type of join or by changing the columns that are used in the join condition. You can also add and remove join conditions or remove the entire join.

Note: You must have at least one join and one join condition for each additional table that you add to the query.

To modify a join:

- 1 Click the **Join** tab of the query window. You can edit the join in the following ways:
 - Use the table drop-down lists to change the tables that are used in the join.
 - Click the join indicator between the table names to edit the join type. The default join type is `Inner join`. For more information, see [“Understanding the Types of Joins” on page 86](#).
 - Click the operator between the column names to select a new operator. The default operator is `=`.
 - Click  on each side of the join to change the columns that are used in the join.
- 2 To add a new join condition, click . Specify the columns to use in the join. To remove a join condition, select the appropriate join condition, and then click .

Note: You cannot delete a join condition in the following situations:

- The join has only one join condition.
 - The join condition is the first join condition in the join. However, you can modify the first join condition.
-

The screenshot shows the SAS Query Builder interface. On the left, the 'Columns' pane lists 't1 (CLASS)' and 't2 (CLASSFIT)'. The main workspace is divided into tabs: 'Select', 'Join', 'Filter', 'Sort', and 'Output Options'. The 'Join' tab is active, showing a join between '(t1) SASHELP.CLASS' and '(t2) SASHELP.CLASSFIT'. The join conditions are 't1.Name = t2.Name' and 't1.Age = t2.Age'. Below the workspace, the 'Code' pane shows the following SQL code:

```

1 proc sql;
2   %if %sysfunc(exist(WORK.QUERY_FOR_TABLE)) %then %do;
3     drop table WORK.QUERY_FOR_TABLE;
4   %end;
5   %if %sysfunc(exist(WORK.QUERY_FOR_TABLE,VIEW)) %then %do;
6     drop view WORK.QUERY_FOR_TABLE;
7   %end;
8   quit;
9 ;
10 PROC SQL;
11   CREATE TABLE WORK.QUERY_FOR_TABLE AS
12     SELECT
13       (t1.'Name'n),

```

Note: To edit and create joins using SQL code, click **Expression Builder** on the **Join** tab. For more information, see “Building an Expression” on page 195.

Selecting Data

Specifying Columns in the Output

By default, no columns are included in the output. You must specify the columns that you want to appear in the output table. You can also specify an alias to use in place of the column name in the output table.

The order in which the columns are listed on the **Select** tab is the order in which they appear in the output table. You can move columns up, down, and to the top or bottom of the list by right-clicking a column and selecting the appropriate option. You can move multiple adjacent columns in the list by selecting the columns that you want to move, right-clicking one of the columns, and then selecting the appropriate option.

Note: The Length, Label, and Informat columns are not available on the **Columns** subtab of the **Select** tab if you are generating a FedSQL query. The Format column is not available if you are generating a FedSQL query in a flow. If you are generating a SQL query, you can manage the columns that are displayed on the **Columns** subtab by clicking . Use the Manage Columns window to hide and display columns.

You can select columns individually for the output, or you can use different options to select all columns in the input tables.

To select individual columns for the output table:

- In the Columns area of the Query tab, expand the tables and drag the columns that you want to include in the output to the **Columns** subtab of the **Select** tab.

The screenshot shows the SAS Query Builder interface. On the left, the 'Columns' area shows a tree view of tables: 't1 (CLASS)' with columns Name, Sex, Age, Height, Weight, and 't2 (CLASSFIT)' with column Name. The main area shows a grid for selecting columns. The grid has columns for 'Table', 'Source', 'Name', 'Label', 'Type', and 'Length'. Three rows are visible, representing selected columns from 't1' and 't2'.

Table	Source	Name	Label	Type	Length
<input type="checkbox"/>	t1	Name	Name	Character	8
<input type="checkbox"/>	t1	Age	Age	Numeric	8
<input type="checkbox"/>	t2	predict	Predicted Value	Numeric	8

Below the grid, the generated SQL code is shown:

```

9 ;
10 PROC SQL;
11 CREATE TABLE WORK.QUERY AS
12 SELECT
13 (t1.'Name'n),
14 (t1.Age),
15 (t2.predict) LABEL="Predicted Value of Weight"
16 FROM
17 SASHELP.CLASS t1
18 INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
19 ;
20 QUIT;
21 RUN;

```

To select all columns from a table by using column names:

- In the Columns area of the Query tab, right-click the table and select **Add columns**. This option creates a SELECT clause that includes all individual column names:

```
SELECT table-alias.column-name1 <, table-alias.column-name2,...>
```

Note: If the table has more than 100 columns, only the first 100 columns are added to the SELECT clause. To add the remaining columns, click **More**. Select the remaining columns and click **OK**.


To select all columns from a table by using the asterisk (*) notation:

- In the Columns area of the Query tab, right-click the table and select **Select all columns**. This option creates a SELECT clause that uses the asterisk notation (*) to represent all columns from the table:

```
SELECT table-alias.*
```


Note: This option is useful if the number of columns in your input table might change.

To select all columns from all tables by using the asterisk (*) notation:

- Click  in the Columns area of the Query tab and select **Select all columns in all tables**. This option creates a SELECT clause that uses the asterisk (*) notation to represent all columns and all tables:

```
SELECT *
```

Note: This option is useful if the number of tables in the query might change or the number of columns in a table might change.

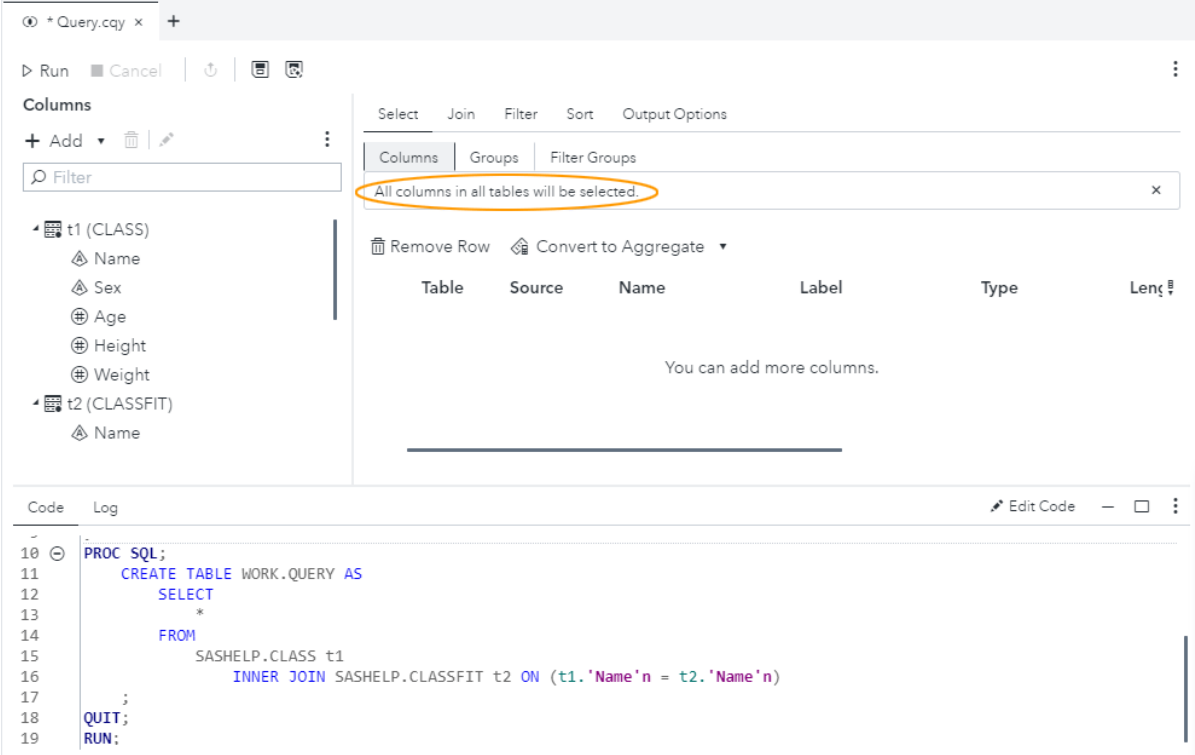

The screenshot shows the SAS Query Builder interface. On the left, the 'Columns' pane lists tables 't1 (CLASS)' and 't2 (CLASSFIT)' with their respective columns. The 'Columns' tab is active, and a message box states 'All columns in all tables will be selected.' The SQL code at the bottom is as follows:

```

10 PROC SQL;
11     CREATE TABLE WORK.QUERY AS
12     SELECT
13     *
14     FROM
15     SASHELP.CLASS t1
16     INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
17 ;
18 QUIT;
19 RUN;

```

To specify an alias for a column:

- On the **Select** tab, use the Name column to specify any aliases that you want to use for the columns. The alias is used as the column heading for the output data.

```

10 PROC SQL;
11   CREATE TABLE WORK.QUERY AS
12     SELECT
13       *,
14       t1.'Name'n AS 'Student Name'n,
15       t1.Age,
16       t2.predict LABEL="Predicted Value of Weight"
17     FROM
18       SASHELP.CLASS t1
19       INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
20   ;
21 QUIT;
22 RUN;

```

To remove columns from the output:

- On the **Select** tab, select the check boxes for the columns that you want to remove and click **Remove Row**.

To remove all columns from the query, select the check box for the table on the **Select** tab and click **Remove Row**.

Creating a Calculated Column

You can insert a new column into your query that is calculated from other columns or values. You can use a calculated column to summarize values, replace values based on a condition, and perform string and numeric calculations. After you create a calculated column, you can use the column to filter, sort, or group your output.

To create a calculated column:

- 1 In the Columns area of the Query tab, click **Add** ⇒ **Calculated column**.
- 2 Use the expression builder in the Calculated Column window to create your column. For more information, see [“Building an Expression” on page 195](#).
- 3 After you create the expression for the column, use the **Properties** tab in the expression builder area to specify a name for the column. You can also specify a label, data type, length, format, and informat.

- 4 To automatically add the calculated column to the list of columns on the Select tab, click **Add new calculated column to the Select tab**. This option is selected by default when you create a calculated column.
- 5 Click **OK** to create the calculated column.


The screenshot shows the 'Calculated Column' dialog box. On the left, there is a tree view of columns under 'Selected Columns' and 'Calculated Columns'. The 't1 (CARS)' table is expanded, showing columns like Make, Model, Type, Origin, DriveTrain, MSRP, Invoice, EngineSize, Cylinders, Horsepower, MPG_City, MPG_Highway, Weight, Wheelbase, and Length. The 'Invoice' column is selected. The main text area contains the formula: `t1.MSRP - t1.Invoice`. Below the text area, there are tabs for 'Properties', 'Values', and 'Log'. The 'Properties' tab is active, showing the following fields:

- Column name: Profit
- Column label: Profit Margine
- Type: Numeric
- Length (in bytes): 8
- Format: DOLLARX8.2
- Informat: DOLLARX8.2


 At the bottom, there is a checked checkbox labeled 'Add new calculated column to the Select tab'.

Using Summary Functions

You can perform aggregation, or summary, functions on any of the columns in your query. When you aggregate a column, a new calculated column is automatically created and added to your query. To perform an aggregation function, select the column on which you want to perform an aggregation function. Click **Convert to Aggregate** and select the function that you want to use. The following example shows the Age column after it has been converted to a calculated column that calculates the average age of all of the students:

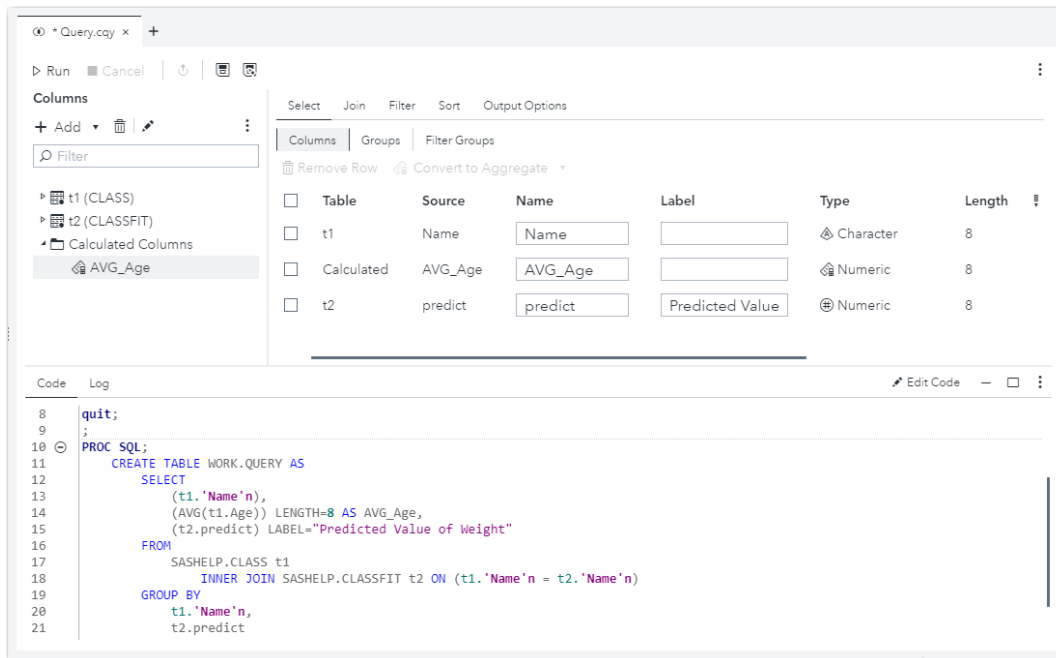

By default, the query displays the results on the **Output Data** tab and generates an output table in the Work library.

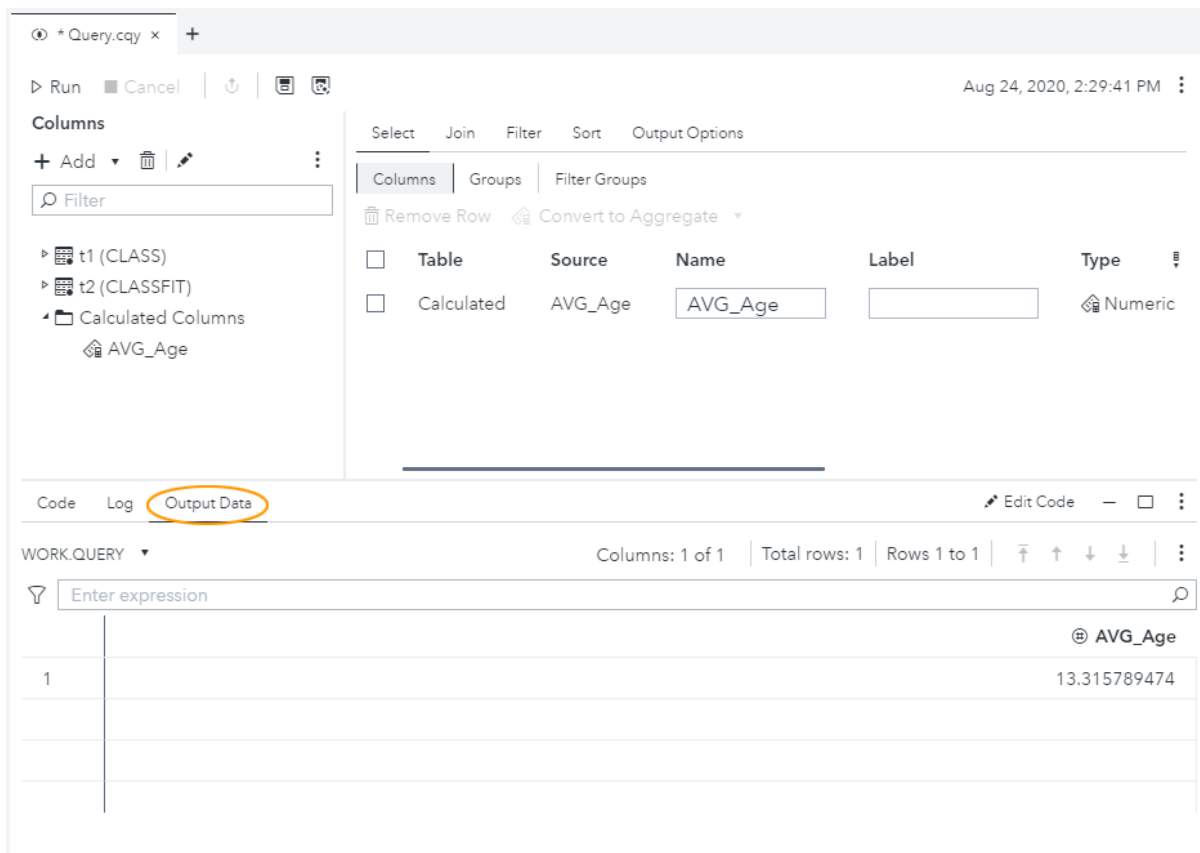

By default, when you aggregate a column, your output is grouped by all of the columns without aggregation. For more information, see [“Grouping Your Output” on page 100](#).

Working with Conditional Expressions

Creating a Conditional Expression

You can create a conditional expression in your query by creating a calculated column that uses the CASE function. A conditional expression enables you to use logic similar to "IF-THEN/ELSE" to return values that can be used to create a column.

Note: You cannot create conditional expressions if you are generating a FedSQL query. For more information, see [“Generating a FedSQL Query” on page 110](#).

For example, you could create an expression to extract the first letter of a last name and replace last names starting with "A" through "F" with the value "A - F," replace last names starting with "G" through "L" with the value "G - L," and so on.

To create a conditional expression:

- 1 In the Columns area of the Query tab, click **Add** ⇒ **Calculated column**.
- 2 Use the following template for the CASE expression syntax to enter your own CASE expression in the expression box:

```
CASE <CaseOperand>
  WHEN <whenCondition> THEN <resultExpression>
  WHEN <whenCondition> THEN <resultExpression>
  ELSE <resultExpression>
END
```

- **<CaseOperand>** – the name of the column that you are using in the expression.
 - **<whenCondition>** – the existing value of the column.
 - **<resultExpression>** – the value that you want to assign to the column.
- 3 After you create the expression for the column, use the **Properties** tab in the lower half of the expression builder window to specify a name for the column. You can also specify a label, data type, length, format, and informat.

Note: For more information, see [“CASE Expression” in SAS SQL Procedure User’s Guide](#).

Sample Conditional Expressions

The following example uses the SUBSTR function to extract the first letter of the last name, and then assign a replacement value based on that letter.

```
CASE WHEN (SUBSTR(tablename.LastName,1,1) between "A" and "F") THEN "A - F"
      WHEN (SUBSTR(tablename.LastName,1,1) between "G" and "L") THEN "G - L"
      WHEN (SUBSTR(tablename.LastName,1,1) between "M" and "R") THEN "M - R"
      WHEN (SUBSTR(tablename.LastName,1,1) between "S" and "Z") THEN "S - Z"
END
```

The following example replaces age values with "Under 35," "35 - 50," and "Over 50."

```
CASE
  WHEN tablename.Age < 35 THEN "Under 35"
  WHEN tablename.Age between 35 and 50 THEN "35 - 50"
  ELSE "Over 50"
END
```

Filtering Data

Creating a Filter

When you query data, you might want to retrieve only rows that meet certain criteria, based on values of columns in the data. The process of telling SAS Studio which rows to retrieve is called setting a filter and is done on the **Filter** tab. This process corresponds to using a WHERE clause in an SQL query.


To use the expression builder to create a filter expression, click **Expression Builder** on the toolbar. For more information, see ["Building an Expression" on page 195](#).


- 1 Click the **Filter** tab, and then drag one or more columns from the Columns area.


.....

Note: It is possible to filter the output table by columns that are not selected for the output.

.....

- 2 Click  beside the column for which you want to specify filter criteria. In the filter window, select a comparison operator from the operator drop-down list. The default value is **Equal to**.

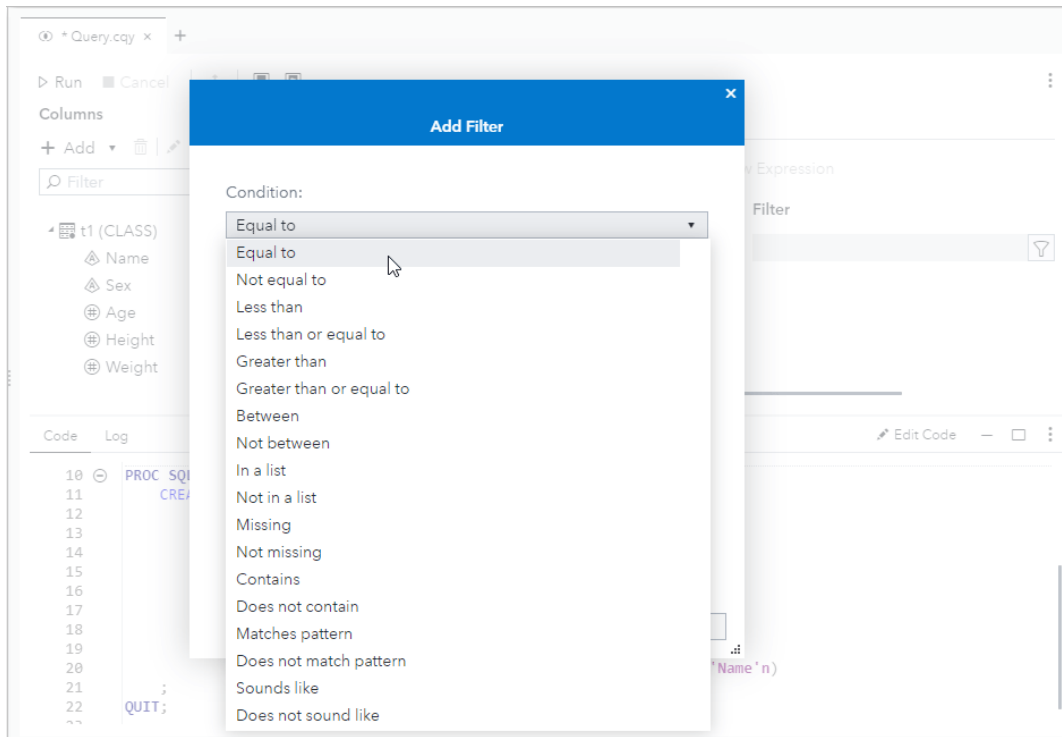


- 3 If the operator that you have selected requires a value, enter or select a value in the **Value** box. To choose from a list of values, click  and click **Get Values** in the Select Value window. Select the values that you want to use and click **OK**.

.....


Note: If you want to search for a value in the value window, use the unformatted value.

.....

.....

Note: If you are using the **In a list** or **Not in a list** operators, click  to enter values, or click **+** to choose from a list of values.

.....

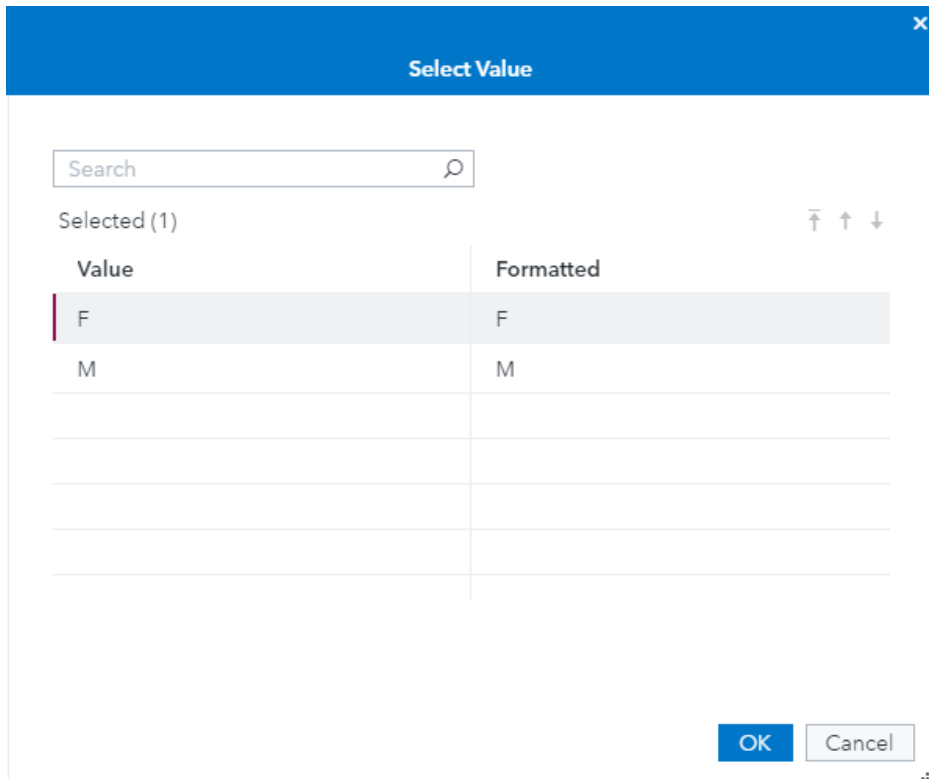

- 4 Depending on the data type of the column that you are using in the filter, you can choose from among the following options:
- **Match case** – retrieves only rows that match the capitalization of the value that you specify. If this option is not selected, the UPPER function is applied to the expression. This option is not selected by default.
 - **Quote string** – encloses values in single quotation marks. This option is selected by default. If you are using a macro variable or other value that is evaluated when the filter is run, you should clear this option.
 - **Allow macros** – enables you to enter character values in a filter on a numeric column.
 - **Use raw values** – uses unformatted numeric, date, time, and datetime values instead of the formatted values. This option is selected by default and is available only for numeric, date, time, and datetime columns. If you want to create a filter based on formatted values, clear this option.

.....

Note:

- If the column does not contain formatted values, the raw values are used in the filter.
 - Some formats cannot be used in a filter that is based on formatted values if you are generating a FedSQL query.
-

TIP It is recommended that you use raw values in a filter. If a filter using formatted values is not working correctly, try filtering on the raw, unformatted values.


- 5 Click **Filter** to add the values to the filter.

Changing the Relationship between Filter Expressions

You can use only one column in a filter expression, but you can use multiple columns to create several expressions. If you create more than one comparison expression in your filter, the default relationship between these filter elements is AND. You can change the relationship between filter elements from AND to OR.

To change the relationship between filters:

- On the **Filter** tab, click the **Operator** value and select a new value.

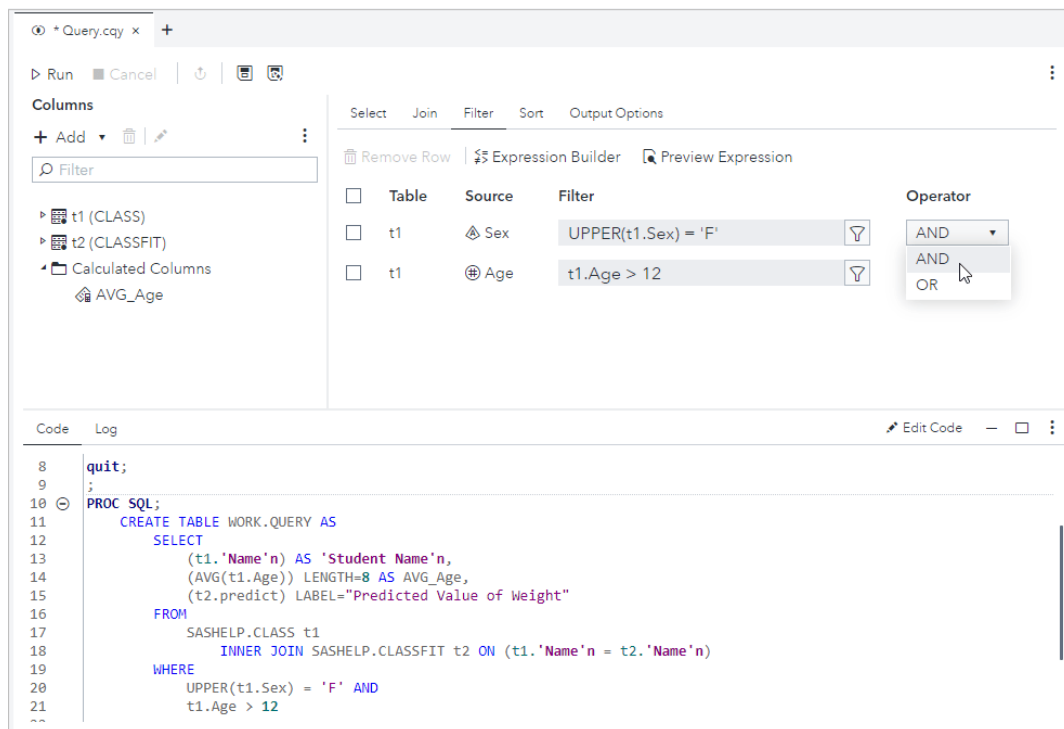

The screenshot shows the SAS Query Builder interface for a query named 'Query.cqy'. The 'Filter' tab is active, displaying two filter expressions:

Table	Source	Filter	Operator	
<input type="checkbox"/>	t1	Sex	UPPER(t1.Sex) = 'F'	AND
<input type="checkbox"/>	t1	Age	t1.Age > 12	OR

The 'Operator' dropdown menu is open, showing 'AND', 'AND', and 'OR' options. The 'Code' pane at the bottom shows the following SQL code:

```

8 quit;
9 ;
10 PROC SQL;
11 CREATE TABLE WORK.QUERY AS
12 SELECT
13 (t1.'Name'n) AS 'Student Name'n,
14 (AVG(t1.Age)) LENGTH=8 AS AVG_Age,
15 (t2.predict) LABEL="Predicted Value of Weight"
16 FROM
17 SASHELP.CLASS t1
18 INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
19 WHERE
20 UPPER(t1.Sex) = 'F' AND
21 t1.Age > 12
22 ~

```

If you are filtering the data by multiple columns, the table is filtered first by the column that is listed first. You can move columns up, down, and to the top or bottom of the list by right-clicking a column and selecting the appropriate option. You can move multiple adjacent columns in the list by selecting the columns that you want to move, right-clicking one of the columns, and then selecting the appropriate option.

Managing Output

Sorting Your Output

You can sort the output from your query by one or more columns from the tables that are used in the query.

.....
Note: It is possible to sort the output table by columns that are not selected for the output.
.....

.....
Note: You cannot sort the output from your query if you are generating a FedSQL query using CAS data. For more information, see [“Generating a FedSQL Query”](#) on page 110.
.....

To sort your output:

- 1 Click the **Sort** tab and drag one or more columns from the Columns area.
- 2 Click the **Sort** box for the column on which you want to sort the data. From the drop-down list, select **Ascending** or **Descending**. The default sort direction is **Ascending**.

The screenshot shows the SAS Studio interface. On the left, the 'Columns' pane lists tables 't1 (CLASS)' and 't2 (CLASSFIT)', along with their columns: Name, Sex, Age, Height, Weight, and a calculated column 'AVG_Age'. The main area shows a table with columns 'Table', 'Source', and 'Sort'. The 'Table' column has 't1' listed. The 'Source' column has 'Age' listed. The 'Sort' column has a dropdown menu open with options 'Ascending', 'Ascending', and 'Descending'. Below the table, the 'Code' pane shows the following SQL query:

```


11 CREATE TABLE WORK.QUERY AS
12 SELECT
13     (t1.'Name'n) AS 'Student Name'n,
14     (AVG(t1.Age)) LENGTH=8 AS AVG_Age,
15     (t2.predict) LABEL="Predicted Value of Weight"
16 FROM
17     SASHELP.CLASS t1
18     INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
19 WHERE
20     UPPER(t1.Sex) = 'F' AND
21     t1.Age > 12
22 GROUP BY
23     t1.'Name'n,
24     t2.predict
25 ORDER BY
26     t1.Age
27 ;

```

- 3 If you are sorting by multiple columns, the output table is sorted first by the column that is listed first. Within each level of the first column, the rows are sorted by the second column in the list, and so on. You can move columns up, down, and to the top or bottom of the list by right-clicking a column and selecting the appropriate option. You can move multiple adjacent columns in the list by selecting the columns that you want to move, right-clicking one of the columns, and then selecting the appropriate option.

Eliminating Duplicate Rows in Output

Some types of queries generate multiple, identical rows. Because these duplicate rows are generally not useful, SAS Studio enables you to keep only one of the identical rows and eliminate the duplicates.

To eliminate duplicate rows, click  in the Columns area and select the **Select distinct rows only** check box.

Grouping Your Output

If you have created a summarized column, you can choose to classify your data into groups based on the values in a column. This action is equivalent to using the GROUP BY clause in an SQL query. For example, if you are calculating the average

height of a group of students, you might want to group the results by age so that you can see the average height for each age group.

By default, the **Automatically group data** option is selected on the **Groups** subtab of the **Select** tab. When this option is selected and you have performed a summary function on a column, your query is automatically grouped by all columns without summary functions. You can choose to edit the list of columns that the query is grouped by. You can add or remove columns from the list, and you can clear the **Automatically group data** option to remove all columns from the list. To return to the default grouping selection, select the **Automatically group data** option.

Note: The **Automatically group data** option includes only columns that are explicitly added to the query using column names and does not include any columns that are added to the query by using the asterisk (*) notation. For more information, see [“Specifying Columns in the Output” on page 88](#).

To group your output:

- 1 Click the **Groups** subtab of the **Select** tab and drag one or more columns from the Columns area.

Note: It is possible to group your output by columns that are not selected for the output.

Note: When you add columns to or remove columns from the **Groups** subtab, the **Automatically group data** option is automatically cleared. To remove the columns that you have added to the **Groups** subtab, select the **Automatically group data** option again. You can also remove individual columns by selecting the column that you want to remove and clicking **Remove Row**.

The screenshot shows the SAS Query Builder interface. The top pane displays the 'Columns' tab with a search filter and a list of columns: t1 (CLASS), t2 (CLASSFIT), and Calculated Columns (AVG_predict). The right pane shows the 'Select' tab with a table 't1' and a column 'Age' selected. The bottom pane shows the generated SQL code:

```

10 PROC SQL;
11 CREATE TABLE WORK.QUERY AS
12 SELECT
13     (t1.'Name'n) AS 'Student Name'n,
14     (t1.Age),
15     (AVG(t2.predict)) LENGTH=8 AS AVG_predict
16 FROM
17     SASHELP.CLASS t1
18     INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
19 WHERE
20     UPPER(t1.Sex) = 'F' AND
21     t1.Age > 12
22 GROUP BY
23     t1.Age
24 ORDER BY
25     t1.Age
~

```

- 2 If you are grouping the data by multiple columns, the table is grouped first by the column that is listed first. You can move columns up, down, and to the top or bottom of the list by right-clicking a column and selecting the appropriate option. You can move multiple adjacent columns in the list by selecting the columns that you want to move, right-clicking one of the columns, and then selecting the appropriate option.

The following example shows you how to find the average weight of students in each age group. First, add the Age and Weight columns to the **Select** tab, and then convert the Weight column to a calculated column using the AVG summary function.

The screenshot displays the SAS Studio interface. At the top, there is a tab for the query file named "Query.cqy". Below the tab are buttons for "Run", "Cancel", and a refresh icon. The date and time "Aug 24, 2020, 3:47:51 PM" are shown in the top right corner.

The main workspace is divided into two panes. The left pane, titled "Columns", contains a search box labeled "Filter" and a list of available columns: "t1 (CLASS)", "t2 (CLASSFIT)", "Calculated Columns", and "AVG_Weight". The right pane, titled "Groups", has tabs for "Columns", "Groups", and "Filter Groups". It includes a "Remove Row" button and a checkbox for "Automatically group data". Below these are two rows of column selection: "Table" (unchecked) and "t1" (checked). The "Source" column is also visible, with "Age" selected (indicated by a plus sign in a circle).

At the bottom of the interface is a code editor with tabs for "Code", "Log", and "Output Data". The "Code" tab is active, showing the following SAS code:

```

10 PROC SQL;
11     CREATE TABLE WORK.QUERY AS
12     SELECT
13         (t1.Age),
14         (AVG(t1.Weight)) LENGTH=8 AS AVG_Weight
15     FROM
16         SASHELP.CLASS t1
17         INNER JOIN SASHELP.CLASSFIT t2 ON (t1.'Name'n = t2.'Name'n)
18     GROUP BY
19         t1.Age
20     ORDER BY
21         t1.Age
22     ;
23 QUIT;
24 RUN;

```

To see the average weight of students by age, the query is grouped by the Age column. The results show the average weight for each age group.

The screenshot shows a query editor window titled "Query.cqy". The interface includes a "Columns" panel on the left with a search filter and a list of columns: t1 (CLASS), t2 (CLASSFIT), Calculated Columns, and AVG_Weight. The main workspace has tabs for "Columns", "Groups", and "Filter Groups". Below these tabs are options for "Remove Row" and "Automatically group data". A "Source" section shows a table named "t1" with a selected column "Age". At the bottom, there is a "Code" tab, a "Log" tab, and an "Output Data" tab. The "Output Data" tab is active, displaying a table with 2 columns and 4 rows. The columns are "Age" and "AVG_Weight". The rows contain the following data:

	Age	AVG_Weight
1	11	67.75
2	12	94.4
3	13	88.666666667
4	14	101.875

Note: By default, the query generates a table of the results. To generate a report of the results (which is displayed on the **Results** tab), you must specify **Report** as the output type for the query. For more information, see [“Saving Your Results” on page 105](#).

Subsetting Grouped Data

If you have created a summarized column or a calculated column that contains a summary function, you can choose to classify your data into groups based on the values in a column. When you group your output by one or more columns, you can create a filter to subset the grouped data based on specified conditions. This action is equivalent to using the **HAVING** expression in an SQL query.



Note: You can also choose to filter the raw, unsummarized data. For more information, see [“Creating a Filter” on page 95](#).

You can use one column in a filter, or you can use multiple columns to create several comparison expressions. If you create more than one comparison expression in your filter, the default relationship between these filter elements is **AND**. You can change the relationship between filter elements from **AND** to **OR**, and you can group elements together.

You can choose to create either a basic filter or you can create an advanced filter by using the expression builder:

- 1 Click the **Filter Groups** subtab of the **Select** tab and drag one or more columns from the Columns area.

Note: It is possible to subset your grouped data by columns that are not selected for the output.

- 2 Click  beside the column for which you want to specify filter criteria. In the filter window, select a comparison operator from the **Condition** drop-down list. The default value is `Equal`.
- 3 If the operator that you have selected requires a value, enter or select a value in the **Value** box. To choose from a list of values, click  and click **Get Values** in the Select Value window. Select the values that you want to use and click **OK**.

Note: If you want to search for a value in the value window, use the unformatted value.

- 4 Depending on the data type of the column that you are using in the filter, you can choose from among the following options:
 - **Match Case** – retrieves only rows that match the capitalization of the value that you specify.
 - **Quote Strings** – encloses values in single quotation marks. This option is selected by default. If you are using a macro variable or other value that is evaluated when the filter is run, you should clear this option.
 - **Allow macros** – enables you to enter character values in a filter on a numeric column.
- 5 Click **Filter** to add the filter expression to the query.

Note: If you create more than one filter expression, you can change the relationship between the expressions. For more information, see [“Changing the Relationship between Filter Expressions” on page 98](#).

Saving Your Results

You can choose to generate your results in any one of three formats: report, data table, or data view.

If you save your results as a data table or data view, you can specify the library and table name that you want to use. If you do not specify the library and table name, the results are saved in the Work library.

To specify the results format:

- 1 In the query window, click the **Output Options** tab.
- 2 Select the format that you want to use from the **Output type** drop-down list.

Report

saves the query results as a report that you can download as an HTML, PDF, or RTF file. Query results in this format are not updated until you rerun the query. You cannot run tasks against query results in this format.

Table

saves the query results as a static data table against which you can run tasks. Query results in this format are not updated until you rerun the query. By default, the data table is stored in the Work library.

View

saves the query results as a dynamic data view against which you can run tasks. Each time you open query results in the data view format, the results are updated with any changes to the data that is used in the query. By default, the data view is stored in the Work library.

Note: This option is not available if you are generating a FedSQL query. For more information, see [“Generating a FedSQL Query” on page 110](#).

To save your output data to a specific location:

- 1 On the Query tab, click the **Output Options** tab.
- 2 If you are generating a FedSQL query using CAS tables, you must use the **Session reference** option to specify the name of the default CAS session to use. For more information, see [“Generating a FedSQL Query” on page 110](#).
- 3 Enter the name of the library in which you want to save your results in the **Library** box.
- 4 To specify a name for the output data, enter the name that you want to use in the **Table name** box.

Specifying Limits for Input Processing

When you create a query, you can restrict the number of rows that your query processes from each source table. This option corresponds to the INOBS= option in PROC SQL and is useful when you want to reduce processing time in order to test a query.

Note: This option is not available if you are generating a FedSQL query. For more information, see [“Generating a FedSQL Query” on page 110](#).

When you set a limit n on the number of rows to process, SAS Studio uses the first n rows from each source table in the query. If you have added a filter to your query, SAS Studio uses the first n rows from each table that match your filter criteria.

This option does not apply when the output format is a data view. For more information, see [“Saving Your Results” on page 105](#).

Note: If you have a computed column in your query data that performs a function on the whole table, such as sum or average, then limiting the number of input rows

affects the value that is calculated for that column. The function is performed only on the rows that are processed.

To limit the number of rows to process:

- Click the **Output Options** tab. Select **Limit number of matching rows to process (INOBS)** and specify the number of rows that you want the query to process.

Note: When you limit the number of rows to process and you have joined tables, the maximum number of rows that the query can return is the Cartesian product of the number of rows from each table. For example, if you set the limit to five rows and you join two tables, the maximum number of rows that the query can return is 25 ($5 * 5$). If you join three tables, the maximum number of rows that the query can return is 125 ($5 * 5 * 5$).

Specifying Limits for Output Processing

When you create a query, you can restrict the number of rows that your query saves in the output. This option corresponds to the `OUTOBS=` option in PROC SQL and is useful when you want to restrict the size of your output for testing purposes.

Note: This option is not available if you are generating a FedSQL query. For more information, see [“Generating a FedSQL Query” on page 110](#).

This option does not apply when the output format is a data view. For more information, see [“Saving Your Results” on page 105](#).

Note: When you limit the size of your output, you are not reducing the processing time of the query. The query still processes all of the data in each source table. You are reducing only the size of the output.

- Click the **Output Options** tab. Select **Limit number of matching rows to save in output (OUTOBS)** and specify the number of rows that you want in your output.

Specifying Pass-Through and Table Options

You can specify whether you want to use explicit pass-through for queries that include only tables from an Oracle database. When you select this option, the SQL code is passed to the Oracle database for processing. If your data files are very large, this option can improve your performance because the files do not have to be copied to the SAS server for processing. If you use the expression builder to build expressions, such as a join or filter expression, this option enables you to use Oracle SQL syntax.

Note: If you do not select this option, SAS Studio uses the SAS/ACCESS Interface to Oracle database engine to create code for the target database.

You can also specify options to apply when the output table is created or updated. If you are generating a SQL query, you must specify SQL statement table options. If you are generating a FedSQL query, you must specify FedSQL statement table options.

To specify whether to use explicit pass-through processing:

- Click the **Output Options** tab, and then click the **Explicit pass-through processing of the source tables** option.

Note: This option is not available if the query includes any tables other than Oracle tables or if you are using PROC FEDSQL to generate code.

To specify output table options:

- Click the **Output Options** tab. Enter your options in the **Enter output table options, separated by spaces** box.

Note: You must separate multiple options with spaces and include any quotation marks that are required for string values.

Select
Join
Filter
Sort
Output Options

Output type:

Library:

Table name:

Limit number of matching rows to process (INOBS):

Limit number of matching rows to save in output (OUTOBS):

▼ Pass-through and table options

Explicit pass-through processing of the source tables
Enter output table options, separated by spaces:

▼ Notes

Edit Code


Adding a Note to a Query

You can annotate your query with a note on the Output Options tab.

- Click the **Output Options** tab. Enter your note in the **Notes** box.

Running a Query

After you specify all the criteria for your query, you can generate your results by clicking **Run** on the Query tab toolbar. The output data or results are added to the results area of the Query tab.

Note: You can reset the query to its initial state in which only the tables are specified and any selected columns, filters, sorting criteria, and output options are removed. To reset the query, click  > **Reset**.

Generating a FedSQL Query

By default, queries in SAS Studio use PROC SQL to generate results. However, you can choose to create your query using PROC FEDSQL instead of PROC SQL. PROC SQL is designed for queries that use data on your SAS server or data from a single database. PROC FEDSQL is designed for federated queries, which can access tables from multiple database connections and return a single result set.

PROC FEDSQL provides many benefits if you are working in an environment in which you need more features than are provided in the SQL procedure:

- FedSQL conforms to the ANSI SQL:1999 core standard.
- FedSQL supports many more data types than are available in SAS SQL implementations, including BIGINT, DATE, INTEGER, and VARCHAR.
- FEDSQL queries can run on a CAS server.
- FedSQL handles federated queries and can join tables from multiple database connections.
- FedSQL language can create data in any of the supported data sources, even if the target data source is not represented in a query.

For more information, see [Overview: PROC FEDSQL](#).

The data types that are supported by PROC SQL and PROC FEDSQL are listed in the following table:

PROC SQL	PROC FEDSQL
CHARACTER	CHARACTER
DATE*	DATE
DECIMAL*	DECIMAL*
DOUBLE	DOUBLE
FLOAT*	FLOAT*
INTEGER*	INTEGER
NUMERIC	NUMERIC
REAL*	REAL*

PROC SQL	PROC FEDSQL
SMALLINT*	SMALLINT*
	BIGINT
	VARCHAR

Note: * When you specify these data types, they are converted to either the CHARACTER or DOUBLE (NUMERIC) data type.

By default, queries are generated using PROC SQL. You can change the default procedure for all queries to PROC FEDSQL, and you can also change the procedure that is used for an individual query.

- To automatically use PROC FEDSQL when you create a new query, select **Options** ⇒ **Preferences** and click **Query**. Select **PROC FEDSQL**.

Note: This option is applied only to queries that you create after you have selected the option.

- To specify the procedure that is used in an individual query, click the **Output Options** tab in your query. Use the **Generate code using** option to specify either **PROC SQL** or **PROC FEDSQL** before you begin creating your query. If you change this option after you have started creating your query, your query might contain errors.

Note: If you are generating a FedSQL query using CAS tables, you must use the **Session reference** option on the **Output Options** tab to specify the name of the default CAS session to use.

The query functionality for creating SQL and FedSQL queries is very similar. The following table lists some of the differences between SQL and FedSQL queries:

Query Feature	Available in SQL?	Available in FedSQL?
Output type – View	Yes.	No.
Output data – CAS table*	Yes, if the input data source is one or more SAS tables and DBMS data sets.	Yes, if the input data source is one or more CAS tables.
Input data - concatenated librefs, such as SASHELP, that are associated with more than one directory	Yes.	No.

Query Feature	Available in SQL?	Available in FedSQL?
Select tab: Length, Label, and Informat columns	Yes.	No. In addition, the Format column is available only for stand-alone queries.
Sorting output	Yes.	Yes, if the query does not use CAS data. No, if the query uses CAS data.
Output Options – Session reference	No.	Yes.
Output Options: Limit number of matching rows to process, Limit number of matching rows to save in output	Yes.	No.
Operators: Contains, Does not contain, Sounds like, Does not sound like, Any, All	Yes.	No.
Functions: CASE, CAT, CATS, CATX, COMPBL, COMPRESS, FIND, INPUT, INT, INTCK, INTNX, LEFT, LENGTH, MDY, N, NLDATE, NLDATM, PROPCASE, SCAN, SUBSTR, TRANWRD, WEEK, YRDIF	Yes.	No.
Aggregations: CV, FREQ, MEAN, N, PRT, STD, SUMWGT, T, VAR	Yes.	No. The following aggregations are available only in FedSQL: <ul style="list-style-type: none"> ■ PROBT (replaces PRT) ■ STDDEV (replaces STD) ■ STUDENT_T (replaces T) ■ VARIANCE (replaces VAR)

* If the output from a FedSQL query is a CAS table, then the input data source must also be CAS tables. If the output from a FedSQL query is a SAS table or a DBMS table, then the input must be SAS tables and DBMS tables.

Working with Data

<i>About the Table Viewer</i>	113
<i>Opening and Viewing Data</i>	115
<i>Viewing the Code That Is Used to Create a Table</i>	119
<i>Opening Data in a Task or Query from the Table Viewer</i>	119
<i>Refreshing Your Data</i>	121
<i>Sorting and Freezing Data</i>	121
<i>Filtering Data</i>	122
About Filtering Data	122
Creating a Quick Filter	123
Creating a Filter Expression	124
<i>Importing Data</i>	126
About Importing Data to SAS Studio	126
Import an Excel Worksheet	127
Import a Delimited File (CSV, TSV, DLM)	128
Import a DBMS File	130
Save the Import Data Task	131
<i>Exporting Data</i>	131


About the Table Viewer



The table viewer is used to display your data in SAS Studio. You can click **↓** and **↑** to navigate through the data.

Note: You can click **↓** and **↑** to advance to the last or first page in your data. You cannot navigate directly to the last page of a CAS table, any table with an unknown number of columns, or a data view.

	Make	Model	Type	Origin	Drive
1	Acura	MDX	SUV	Asia	All
2	Acura	RSX Type S 2dr	Sedan	Asia	Front
3	Acura	TSX 4dr	Sedan	Asia	Front
4	Acura	TL 4dr	Sedan	Asia	Front
5	Acura	3.5 RL 4dr	Sedan	Asia	Front
6	Acura	3.5 RL w/Navigation 4dr	Sedan	Asia	Front
7	Acura	NSX coupe 2dr manual S	Sports	Asia	Rear
8	Audi	A4 1.8T 4dr	Sedan	Europe	Front
9	Audi	A4 1.8T convertible 2dr	Sedan	Europe	Front
10	Audi	A4 3.0 4dr	Sedan	Europe	Front
11	Audi	A4 3.0 Quattro 4dr manual	Sedan	Europe	All
12	Audi	A4 3.0 Quattro 4dr auto	Sedan	Europe	All
13	Audi	A6 3.0 4dr	Sedan	Europe	Front
14	Audi	A6 3.0 Quattro 4dr	Sedan	Europe	All
15	Audi	A4 3.0 convertible 2dr	Sedan	Europe	Front

Note: By default, the table viewer displays the first 200 rows and 100 columns of the table. If the structure or data values of the table change while the table is open, you must refresh the table viewer to see the changes. If the structure of the table changes and you do not refresh the table, the columns that are listed in the **Libraries** section of the navigation pane might be different from the columns that are displayed in the table viewer. For more information, see [“Refreshing Your Data” on page 121](#).

You can view the properties of the table and its columns by clicking  on the toolbar of the **Libraries** section in the navigation pane.

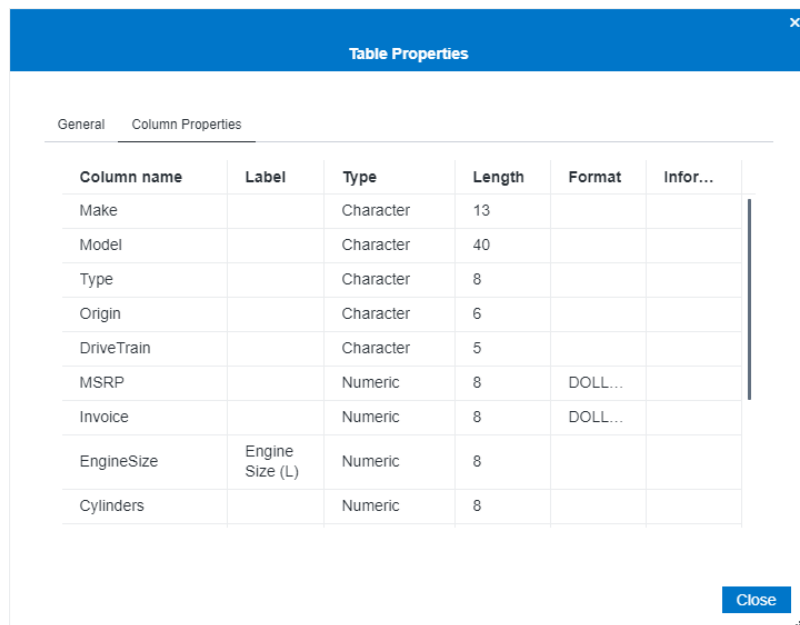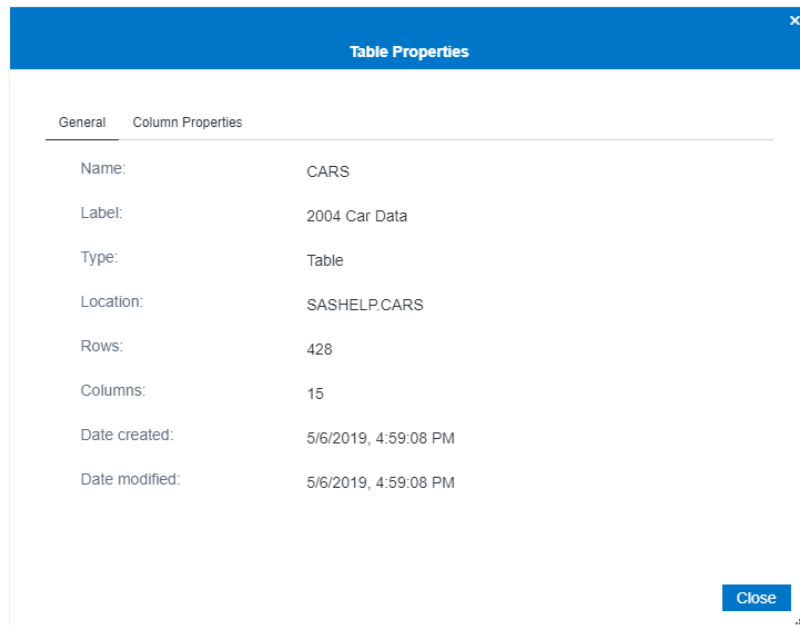

Opening and Viewing Data

You can open files in SAS Studio in several ways:


- You can double-click a file in the Explorer and Libraries sections of the navigation pane.
- You can drag a file from the Explorer and Libraries sections of the navigation pane to the work area.
- You can search for a file and open it by double-clicking it in the search results.


- You can open a file by using a file reference in the File References section of the navigation pane. You can open the file by double-clicking it or by dragging it to the work area.


Note: You cannot access password-protected data or data in a SAS Content folder that includes "&" in the folder name.

Note: If you open a table that was created with an encoding that has a different byte size than the encoding of your SAS compute server, you must use the CVP (character variable padding) engine in your LIBNAME statement. For more information, see [Avoiding Character Data Truncation by using the CVP Engine](#) in *SAS National Language Support (NLS): Reference Guide*.

When you open a table, the first 100 columns in the table are displayed by default. The number of columns that can be displayed is determined by the **Columns displayed** option on the Tables page of the Preferences window. For more information, see ["Setting Tables Preferences" on page 191](#).

To specify which columns you want to include in the table viewer, click  on the toolbar and select **Column selection**. You can use the Column Selection window to search for columns and to specify whether to show or hide specific columns in the data. You can also right-click a column in the table viewer and select **Hide** to hide a column.

Note: You can click  in the Column Selection window to specify whether to display the column name, label, or both, how many columns to display per page, and how to sort the columns. These settings affect only the Column Selection window.

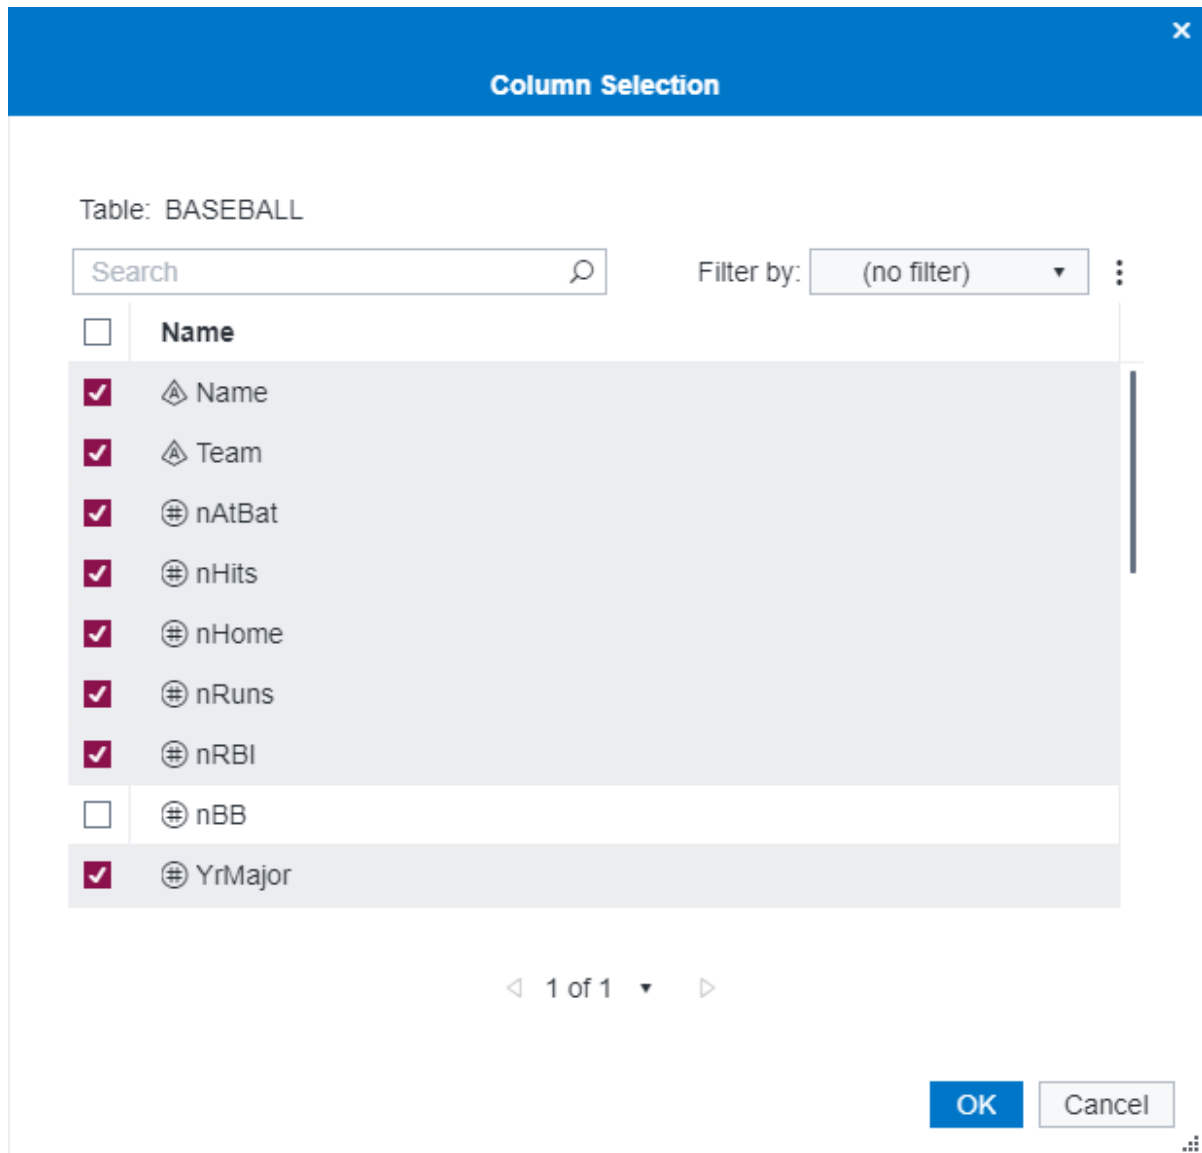

By default, the column names are displayed, but you can choose to display the column labels by clicking ⋮ on the toolbar and selecting **Show labels**.

SASHELP.BASEBALL Columns: 24 of 24 Total rows: 322 Rows 1 to 200

Enter expression

	Name	Team	nAtBat			
1	Allanson, Andy	Cleveland	293			
2	Ashby, Alan	Houston	315			
3	Davis, Alan	Seattle	479			
4	Dawson, Andre	Montreal	496			
5	Galarraga, Andres	Montreal	321			
6	Griffin, Alfredo	Oakland	594	✓	Show names	
7	Newman, Al	Montreal	185	✓	Show filter	
8	Salazar, Argenis	Kansas City	298		Show distinct rows >	
9	Thomas, Andres	Atlanta	323		Row paging >	
10	Thornton, Andre	Cleveland	401		Print	
11	Trammell, Alan	Detroit	574		Refresh >	
12	Trevino, Alex	Los Angeles	202		Table properties	
13	Van Slyke, Andy	St Louis	418			
14	Wiggins, Alan	Baltimore	239	60		
15	Almon, Bill	Pittsburgh	196	43		
16	Beane, Billy	Minneapolis	183	39		
17	Bell, Buddy	Cincinnati	568	158	20	
18	Biancalana, Buddy	Kansas City	190	46		

Note: By default, the table viewer displays the total number of rows in the table and the total number of filtered rows, if you have filtered the data. However, if SAS Studio is unable to determine the row counts without affecting performance, then the row counts are not displayed. Row counts are not available for relational tables, views, and Hadoop data.

You can change the order of the columns in the table viewer by dragging a column to a new position in the table viewer or in the Columns area. You can also sort and freeze the data by one or more columns. For more information, see [“Sorting and Freezing Data”](#) on page 121.


SASHELP.CARS x +

SASHELP.CARS Columns: 15 of 15 Total rows: 428 Rows 1 to 200


Enter expression


	Make	Model	Type	DriveTrain	Origin
1	Acura	MDX	SUV	Asia	All
2	Acura	RSX Type S 2dr	Sedan	Asia	Front
3	Acura	TSX 4dr	Sedan	Asia	Front
4	Acura	TL 4dr	Sedan	Asia	Front
5	Acura	3.5 RL 4dr	Sedan	Asia	Front
6	Acura	3.5 RL w/Navigation 4dr	Sedan	Asia	Front
7	Acura	NSX coupe 2dr manual S	Sports	Asia	Rear
8	Audi	A4 1.8T 4dr	Sedan	Europe	Front
9	Audi	A41.8T convertible 2dr	Sedan	Europe	Front
10	Audi	A4 3.0 4dr	Sedan	Europe	Front
11	Audi	A4 3.0 Quattro 4dr manual	Sedan	Europe	All
12	Audi	A4 3.0 Quattro 4dr auto	Sedan	Europe	All
13	Audi	A6 3.0 4dr	Sedan	Europe	Front
14	Audi	A6 3.0 Quattro 4dr	Sedan	Europe	All

Viewing the Code That Is Used to Create a Table

While you select options and customize the table to look the way you want it to, SAS Studio is generating SAS code that you can use. To view the code, click  on the toolbar and select **Generate code**. A new program window appears with the code that was used to create the view of the table in the table viewer. The program is a copy of the code and is no longer associated with the original code. Editing the code does not affect the data that is displayed in the table viewer, and modifying the table viewer does not affect the contents of the code.

Opening Data in a Task or Query from the Table Viewer

You can use the table viewer to open a task or query with the data that you are currently viewing. The task or query opens with the data automatically selected as the input source. To open a task or query with the current data selected, click  on the toolbar and select **Open in a task** or **Open in a query**.

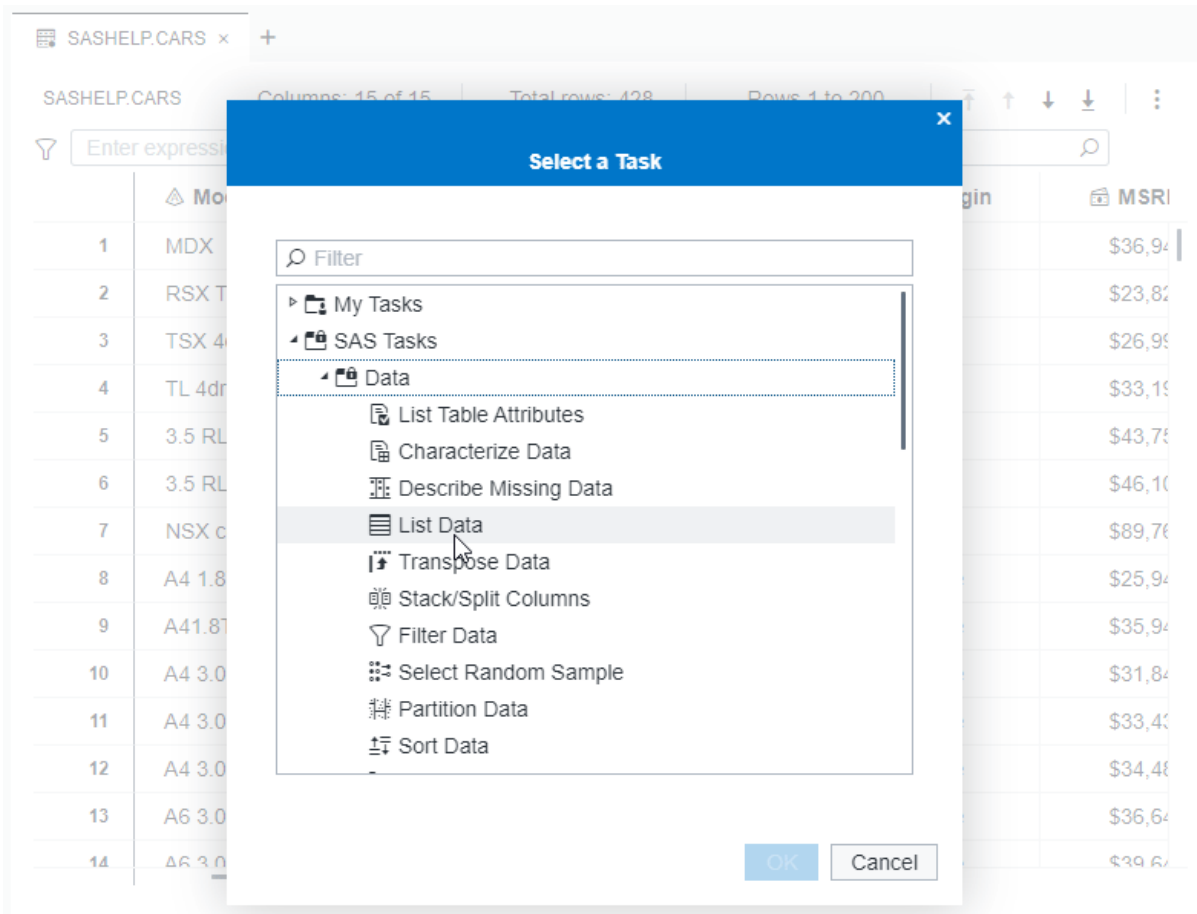

The screenshot shows the SAS Studio interface for a task named 'List Data.ctlk'. The left-hand pane is divided into two sections: 'DATA' and 'ROLES'. Under 'DATA', the table 'SASHELP.CARS' is selected, and there is a 'Filter: (none)' button. Under 'ROLES', there is a 'List variables:' section with an 'Add variables' button. The right-hand pane displays the SAS code for the task, which includes a title and a PROC PRINT statement. The bottom pane is the 'Task Console' showing 'No items'.


```


1  /*
2  *
3  * Task code generated by SAS® Studio 5.2
4  *
5  * Generated on '8/19/19, 2:04 PM'
6  * Generated by ' '
7  * Generated on server ' '
8  * Generated on SAS platform 'Linux LIN X
9  * Generated on SAS version '
10 * Generated on browser 'Mozilla/5.0 (Win
11 * Generated on web client '
12 */
13
14 title1 'List Data for SASHELP.CARS';
15
16 proc print data=SASHELP.CARS label;
17 run;
18
19 title1;

```

Refreshing Your Data

You can refresh the table viewer to update the data that is displayed in the table. When you refresh your data, you can choose to either reset any settings, such as filters or sort order, that you specified, or you can keep your settings.

To refresh the data and reset your settings, click  and select **Table**.

To refresh the data and keep your settings, click  and select **Data**.

Sorting and Freezing Data

In the table viewer, you can right-click a column heading to sort the data by that column or freeze the data at that column. You can sort the data in ascending or descending alphabetical order or display the columns in the order in which they appear in the data table.

To sort the data, right-click the appropriate column and select **Sort** ⇒ **Ascending** or **Sort** ⇒ **Descending**. If the data is already sorted by one or more columns, you can add another column to the sort criteria by right-clicking the column and selecting **Sort** ⇒ **Add to sort ascending** or **Sort** ⇒ **Add to sort descending**.

To freeze a column so that column and any columns to the left remain visible while you scroll through the remaining columns, right-click the appropriate column and select **Freeze column here**. To freeze only the selected column and move it to the leftmost position in the table viewer, right-click the column and select **Freeze column**.

	Make	Model	Type	Origin	Drive
1	Acura	MDX			All
2	Acura	RSX Type S 2dr			Front
3	Acura	TSX 4dr			Front
4	Acura	TL 4dr			Front
5	Acura	3.5 RL 4dr			Front
6	Acura	3.5 RL w/Navigation			Front
7	Acura	NSX coupe 2dr man			Front
8	Audi	A4 1.8T 4dr	Sedan	Europe	Front
9	Audi	A4 1.8T convertible 2dr	Sedan	Europe	Front
10	Audi	A4 3.0 4dr	Sedan	Europe	Front
11	Audi	A4 3.0 Quattro 4dr manual	Sedan	Europe	All
12	Audi	A4 3.0 Quattro 4dr auto	Sedan	Europe	All
13	Audi	A6 3.0 4dr	Sedan	Europe	Front

Filtering Data

About Filtering Data

You can filter your data in order to display only rows that meet certain criteria, based on values in the data. You can filter data in the table viewer either by creating a quick filter based on a single column or by creating a filter expression with one or more columns.

Note: If you are creating a filter with the `=` operator on a numeric column that includes values with a fractional component, you must create the filter by using a range of values to ensure that there are no rounding errors. For example, suppose your data includes a value of 123.45678. To create a filter that displays rows that include that value, you should use the following filter expression:

```
(column-name >= 123.456775 and column-name < 123.456785)
```

Note: If you want to search for a value when you are creating a filter, use the unformatted value.

Creating a Quick Filter

You can create a quick filter on a single column in your data by right-clicking the column heading and selecting **Quick filter**. In the Add Filter window, specify the operator and values that you want to use. You can either enter values or select from a list of values for the column.

Depending on the data type of the column that you are using in the filter, you can choose from among the following options:

- **Match case** – retrieves only rows that match the capitalization of the value that you specify. If this option is not selected, the UPPER function is applied to the expression. This option is not selected by default and is available only for character columns.
- **Quote string** – encloses values in single quotation marks. This option is selected by default and is available only for character columns. If you are using a macro variable or other value that is evaluated when the filter is run, you should clear this option.
- **Allow macros** – enables you to enter character values in a filter on a numeric column. This option is not selected by default and is available only for numeric columns.
- **Use raw values** – uses unformatted numeric, date, time, and datetime values instead of the formatted values. This option is selected by default and is available only for numeric, date, time, and datetime columns. If you want to create a filter based on formatted values, clear this option.

TIP It is recommended that you use raw values in a filter. If a filter is not working correctly because you are using raw, formatted values, try filtering on the raw, unformatted values.


The screenshot shows the SASHELP.PRDSALE window with 1440 rows and 10 columns. An 'Add Filter' dialog box is open over the 'ACTUAL' column. The dialog has the following fields and options:

- Condition:** Equal to (dropdown menu)
- Value:** \$925.00 (text input field)
- Allow macros
- Use raw values
- Buttons:** Reset, Filter, Cancel

The background table data is as follows:

	ACTUAL	PREDI...	COUNTRY	REGION	DIVISION	PRODTYF
1	\$925.00					FURNITURE
2	\$999.00					FURNITURE
3	\$608.00					FURNITURE
4	\$642.00					FURNITURE
5	\$656.00					FURNITURE
6	\$948.00					FURNITURE
7	\$612.00					FURNITURE
8	\$114.00					FURNITURE
9	\$685.00					FURNITURE
10	\$657.00					FURNITURE
11	\$608.00					FURNITURE
12	\$353.00					FURNITURE
13	\$107.00					FURNITURE
14	\$354.00					FURNITURE
15	\$101.00					FURNITURE
16	\$553.00					FURNITURE

Creating a Filter Expression

You can create a filter expression to filter your data by one or more columns. Click  to use the expression builder in the Filter Table Rows window to create a filter expression. For more information, see [“Building an Expression” on page 195](#).

Filter Table Rows

Save
Cancel

Data Functions

Filter

- BASEBALL
 - Name
 - Team
 - nAtBat
 - nHits
 - nHome
 - nRuns
 - nRBI**
 - nBB
 - YrMajor
 - CrAtBat
 - CrHits
 - CrHome
 - CrRuns
 - CrRbi
 - CrBB
 - League
 - Division
 - Position

+ - * ÷ ** || () ' " , 'n

AND OR NOT | = ≠ < ≤ > ≥ | Advanced operators ▾

1 nRBI > 35

Values Log

Filter valu... Equal ▾ Value | Match Case Quote Strings | Rows: ⋮

33

34

35

36

37

38

39

41

SASHELP.BASEBALL x +

BASEBALL Table Rows: 322 | Columns: 24 of 24 | Rows 1 to 200 (filtered) | ⤴ ⤵ ⤶ ⤷ | 🔍 ⋮

🔍 nRBI > 35

	Name	Team	nAtBat	nRBI
1	Ashby, Alan	Houston	315	38
2	Davis, Alan	Seattle	479	72
3	Dawson, Andre	Montreal	496	78
4	Galarraga, Andres	Montreal	321	42
5	Griffin, Alfredo	Oakland	594	51
6	Thornton, Andre	Cleveland	401	66
7	Trammell, Alan	Detroit	574	75
8	Van Slyke, Andy	St Louis	418	61
9	Bell, Buddy	Cincinnati	568	75
10	Bochte, Bruce	Oakland	407	43

Importing Data

About Importing Data to SAS Studio

SAS Studio has two types of import functionality. The quick import enables you to quickly import data from the file system or from SAS Content by selecting a few options.

You can also import data into a flow. This import functionality is more robust and provides additional options. For more information, see [“Importing Data” on page 126](#).

You can import these types of data files into SAS Studio:

- comma-delimited files (CSV).
- dBASE (dBase III, III+, IV, V).
- delimited file (DLM)
- Stata files (DTA).
- JMP files (JMP).
- Paradox DB files (DB).
- SPSS files (SAV).
- tab-delimited (TSV)
- XLS (Microsoft Excel 5.0, 95, 97, 2000-2003)
- XLSX (Microsoft Excel 2007 or later workbook)

If your data file is saved to your local computer, you must upload the file to SAS Studio before you can import it. For more information, see [“Using the Explorer” on page 8](#).

Whether data from another locale imports correctly depends on whether the SAS server supports the locale of the data that is being imported. If you are importing data that contains characters that are different from the current locale, use a Unicode (UTF-8) server to import your data. If you do not use a UTF-8 server and the locale of the data is not supported, unsupported values might appear as question marks (?) in your imported data. For more information about how to set the **Default text encoding** option, see [“Setting General Preferences” on page 183](#).


Note: You cannot import remote files (files that are available through FTP file shortcuts).


Import an Excel Worksheet


To import an Excel worksheet:

- 1 Select **New** ⇒ **Quick import**.
- 2 In the work area, click **Select Server File**.
- 3 Select the file that you want to import and click **Open**. The Import.ctl tab shows the name and location of this Excel file.

This example shows importing the `as_products.xls` file.

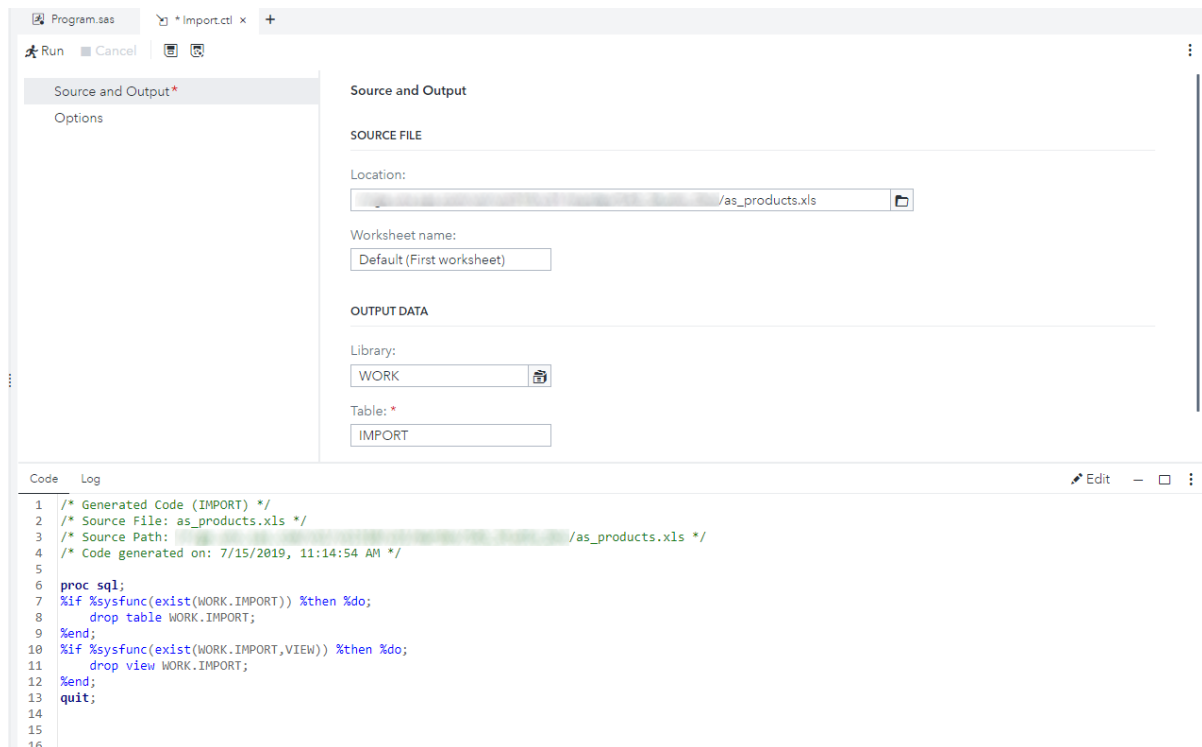

- 4 To import the data from a specific worksheet, enter the name of that worksheet in the **Worksheet name** box. By default, SAS Studio imports the data from the first worksheet.
- 5 To specify the location to save the output data set, click . By default, the output data set is saved to the Work library, which is a temporary location. The contents in this library are deleted when you exit SAS Studio.
- 6 Click **Options**.
 - Select the file type.
 - To generate SAS variable names from the data values in the first row of the worksheet, select **Generate SAS variable names**. If a data value in the first row in the input file is read and it contains special characters that are not valid in a SAS name, such as a blank, then SAS converts the character to an underscore.
 - Specify the encoding.

- To import the Excel worksheet, click .


Import a Delimited File (CSV, TSV, DLM)

Note: To import a tab-delimited file, the filename must have a TSV extension.

To import a delimited file:

- Select **New** ⇒ **Quick import**.
- In the work area, click **Select Server File**.
- Select the file that you want to import and click **Open**. The Import.ctf tab shows the name and location of this text file.

This example shows importing a text file called CommaSep.txt.

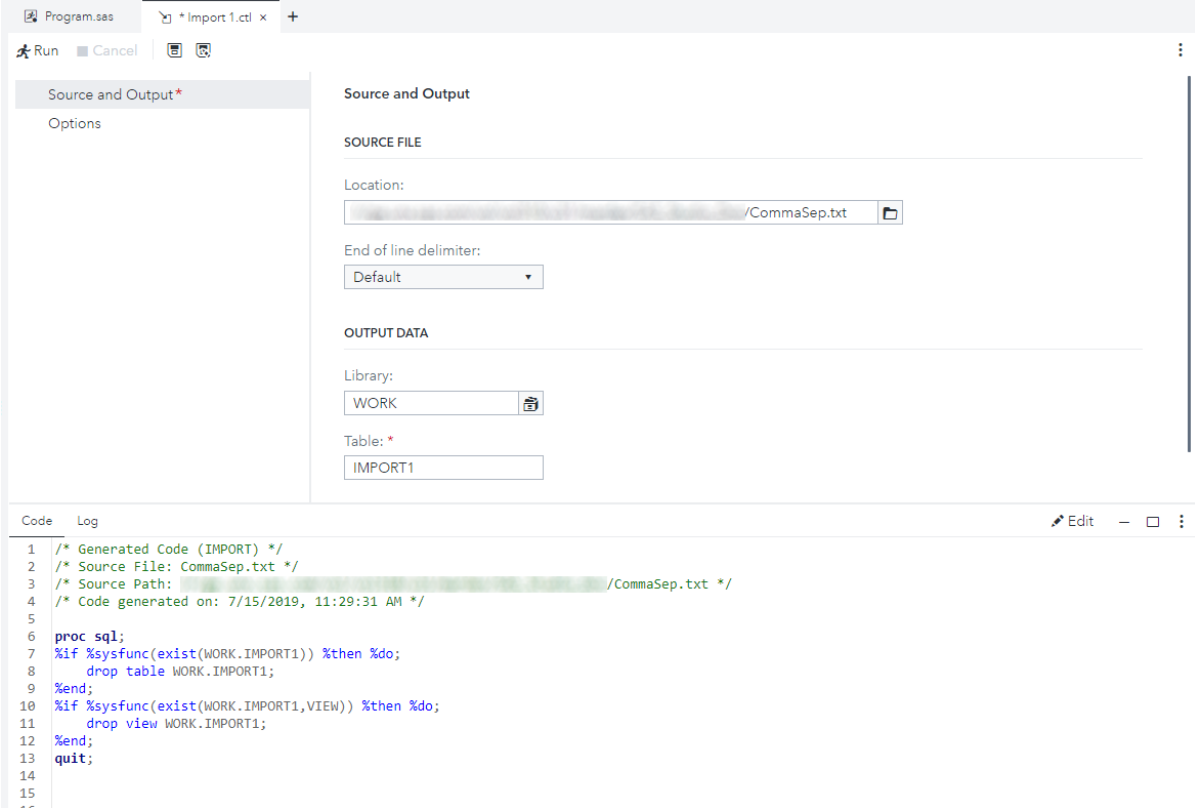


The screenshot shows the SAS Studio interface with the 'Import.ctf' dialog box open. The dialog is divided into two main sections: 'SOURCE FILE' and 'OUTPUT DATA'. In the 'SOURCE FILE' section, the 'Location' field is populated with '/CommaSep.txt'. The 'End of line delimiter' is set to 'Default'. In the 'OUTPUT DATA' section, the 'Library' is set to 'WORK' and the 'Table' is set to 'IMPORT1'. Below the dialog, the SAS code window displays the following code:

```

Code Log
1 /* Generated Code (IMPORT) */
2 /* Source File: CommaSep.txt */
3 /* Source Path: /CommaSep.txt */
4 /* Code generated on: 7/15/2019, 11:29:31 AM */
5
6 proc sql;
7   %if %sysfunc(exist(WORK.IMPORT1)) %then %do;
8     drop table WORK.IMPORT1;
9   %end;
10  %if %sysfunc(exist(WORK.IMPORT1,VIEW)) %then %do;
11    drop view WORK.IMPORT1;
12  %end;
13  quit;
14
15
16

```


- To specify the location to save the output data set, click . By default, the output data set is saved to the Work library, which is a temporary location. The contents in this library are deleted when you exit SAS Studio.
- Click **Options**.
 - Specify the file type.
 - To generate SAS variable names from the data values in the first row in the text file, select **Generate SAS variable names**. If a data value in the first row

in the input file is read and it contains special characters that are not valid in a SAS name (such as a blank), SAS converts the character to an underscore.


- In the **Delimiter** box, enter the delimiter for the values in the file. The default delimiter is a space.

Note: If you use a hexadecimal value to specify the delimiter, you do not need to select the **Quote delimiter** check box.

- To start reading data from a specified row in the delimited text file, enter the starting row in the **Start reading data at row** box. You might want to use this option if you have comments at the top of the text file or the first row of the file is column headings. By default, SAS Studio starts reading at row 2.
- For SAS Studio to determine the appropriate data type and length of the variables, enter a value in the **Guessing rows** box. The task scans the input data file from row 1 to the number that you specified. By default, the first 20 rows are scanned.
- Specify the encoding.

6 To import the data, click .

Click the **Results** tab to see the attributes of the imported data set.

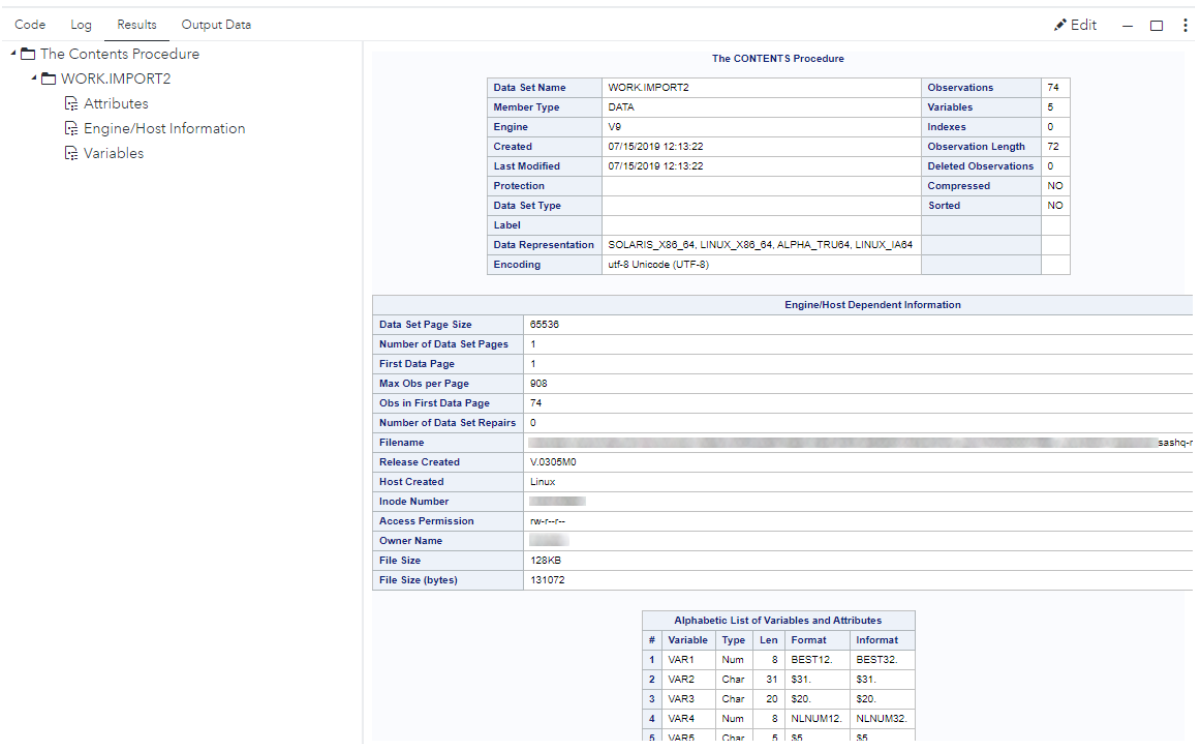

The screenshot shows the SAS Studio interface with the 'Results' tab selected. The left-hand pane shows a tree view with 'WORK.IMPORT2' expanded, showing sub-items for 'Attributes', 'Engine/Host Information', and 'Variables'. The main window displays the following information:

The CONTENTS Procedure			
Data Set Name	WORK.IMPORT2	Observations	74
Member Type	DATA	Variables	5
Engine	V9	Indexes	0
Created	07/15/2019 12:13:22	Observation Length	72
Last Modified	07/15/2019 12:13:22	Deleted Observations	0
Protection		Compressed	NO
Data Set Type		Sorted	NO
Label			
Data Representation	SOLARIS_X86_64, LINUX_X86_64, ALPHA_TRU64, LINUX_IA64		
Encoding	utf-8 Unicode (UTF-8)		

Engine/Host Dependent Information			
Data Set Page Size	65536		
Number of Data Set Pages	1		
First Data Page	1		
Max Obs per Page	908		
Obs in First Data Page	74		
Number of Data Set Repairs	0		
Filename			sshq-r
Release Created	V.0305M0		
Host Created	Linux		
Inode Number			
Access Permission	rw-rw-r--		
Owner Name			
File Size	128KB		
File Size (bytes)	131072		



Alphabetic List of Variables and Attributes					
#	Variable	Type	Len	Format	Informat
1	VAR1	Num	8	BEST12.	BEST32.
2	VAR2	Char	31	\$31.	\$31.
3	VAR3	Char	20	\$20.	\$20.
4	VAR4	Num	8	NLNUM12.	NLNUM32.
5	VAR5	Char	8	\$8.	\$8.

Click the **Output Data** tab to view the new SAS data set. If this data set is in the Work library (as shown in this example), you might want to save it to a more permanent location. Data in the Work library is temporary and is deleted when you exit SAS Studio.

	VAR1	VAR2	VAR3	VAR4	VA...
1	1	Chai	10 boxes x 20 bags	18	False
2	2	Chang	24 - 12 oz bottles	19	False
3	3	Aniseed Syrup	12 - 550 ml bottles	10	False
4	4	Chef Anton's Cajun Seasoning	48 - 6 oz jars	22	False
5	5	Chef Anton's Gumbo Mix	36 boxes	21	True
6	6	Grandma's Boysenberry Spread	12 - 8 oz jars	25	False
7	7	Uncle Bob's Organic Dried Pears	12 - 1 lb pkgs.	30	False
8	8	Falserthwoods Cranberry Sauce	12 - 12 oz jars	40	False
9	9	Mishi Kobe Niku	18 - 500 g pkgs.	97	True
10	10	Ikura	12 - 200 ml jars	31	False
11	11	Queso Cabrales	1 kg pkg.	21	False
12	12	Queso Manchego La Pastora	10 - 500 g pkgs.	38	False
13	13	Konbu	2 kg box	6	False
14	14	Tofu	40 - 100 g pkgs.	23	False
15	15	Genen Shouyu	24 - 250 ml bottles	16	False
16	16	Pavlova	32 - 500 g boxes	17	False
17	17	Alice Mutton	20 - 1 kg tins	39	True
18	18	Carnarvon Tigers	16 kg pkg.	63	False

Import a DBMS File

When you import a file from a database management system (DBMS), the available options depend on the file type. For a list of the supported file types, see [“About Importing Data to SAS Studio” on page 126](#).


- 1 Select **New** ⇒ **Quick import**.
- 2 In the work area, click **Select Server File**.
- 3 Select the file that you want to import and click **Open**. The Import.ctl tab shows the name and location of this text file.
- 4 To specify the location to save the output data set, click . By default, the output data set is saved to the Work library, which is a temporary location. The contents in this library are deleted when you exit SAS Studio.
- 5 Click **Options**.
 - Specify the file type.
 - To generate SAS variable names from the data values in the first row in the text file, select **Generate SAS variable names**. If a data value in the first row in the input file is read and it contains special characters that are not valid in a SAS name (such as a blank), SAS converts the character to an underscore.
 - Specify the encoding.
- 6 To import the data, click .

Save the Import Data Task

You might want to save an instance of the Import Data task so that you can share these settings for importing a specific file with others at your site. SAS Studio saves these instances as a CTL file. CTL files must be run in the same operating environment where they were created. For example, if you create a CTL file using Windows, this CTL file must be run in Windows.

To save the import task:

- 1 Click .

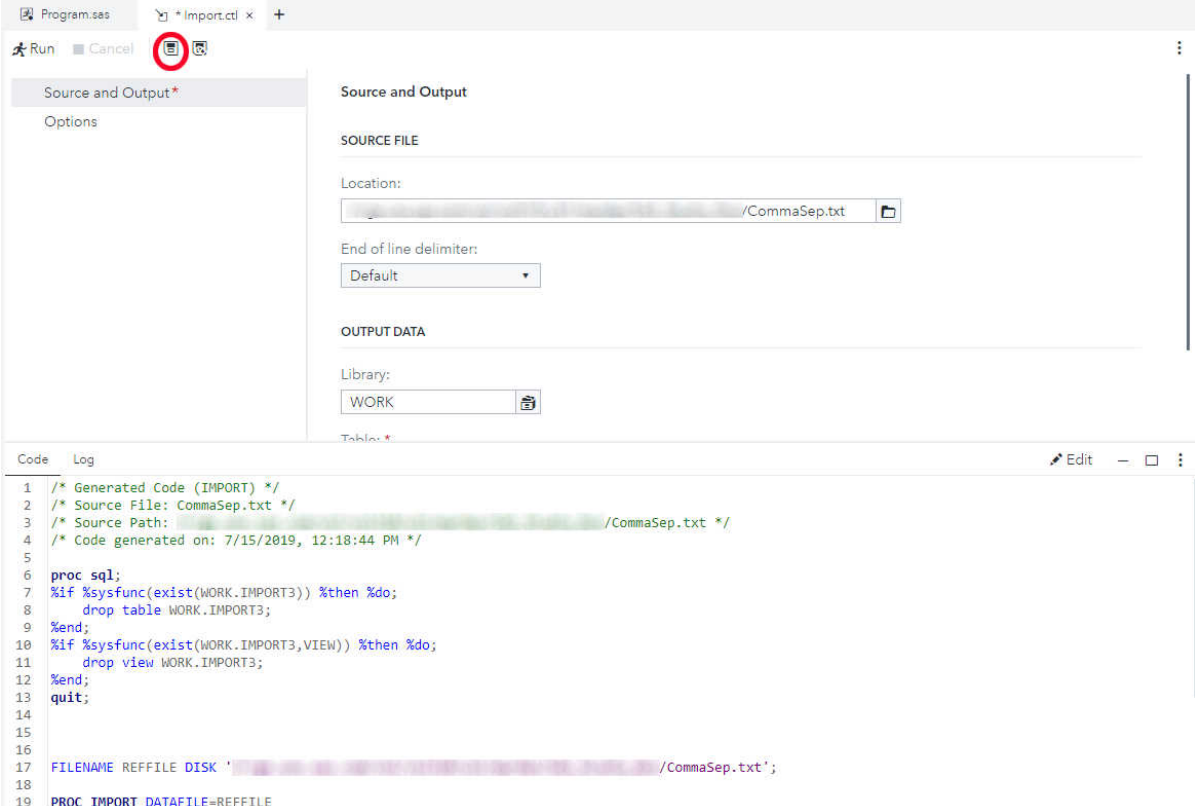

The screenshot shows the SAS Studio interface with the 'Source and Output' dialog for the Import Data task. The 'Location' field is set to '/CommaSep.txt' and the 'Library' is set to 'WORK'. The 'Save As' dialog is open, and the 'Save' button is highlighted with a red circle.

```

1 /* Generated Code (IMPORT) */
2 /* Source File: CommaSep.txt */
3 /* Source Path: /CommaSep.txt */
4 /* Code generated on: 7/15/2019, 12:18:44 PM */
5
6 proc sql;
7   %if %sysfunc(exist(WORK.IMPORT3)) %then %do;
8     drop table WORK.IMPORT3;
9   %end;
10  %if %sysfunc(exist(WORK.IMPORT3,VIEW)) %then %do;
11    drop view WORK.IMPORT3;
12  %end;
13  quit;
14
15
16
17 FILENAME REFFILE DISK ' /CommaSep.txt';
18
19 PROC IMPORT DATAFILE=REFFILE

```

- 2 In the Save As window, specify the name and location, and then click **Save**. The file is saved with a CTL extension.


Exporting Data

In the Standard perspective, you can use SAS Studio to export your data as another file type to a folder that you specify.

Note: You cannot export password-protected data in SAS Studio, and you cannot export data from the Interactive perspective. For more information, see [“Understanding Perspectives” on page 31](#).

To export your data:

- 1 Click **Libraries** in the navigation pane and browse to find the file that you want to export.
- 2 Right-click the file that you want to export and select **Export**. The Export Table window opens.
- 3 Select the folder in which you want to save the exported file.
- 4 In the **Name** box, enter the name of the exported file.
- 5 From the **Type** drop-down list, select the format of the exported file.

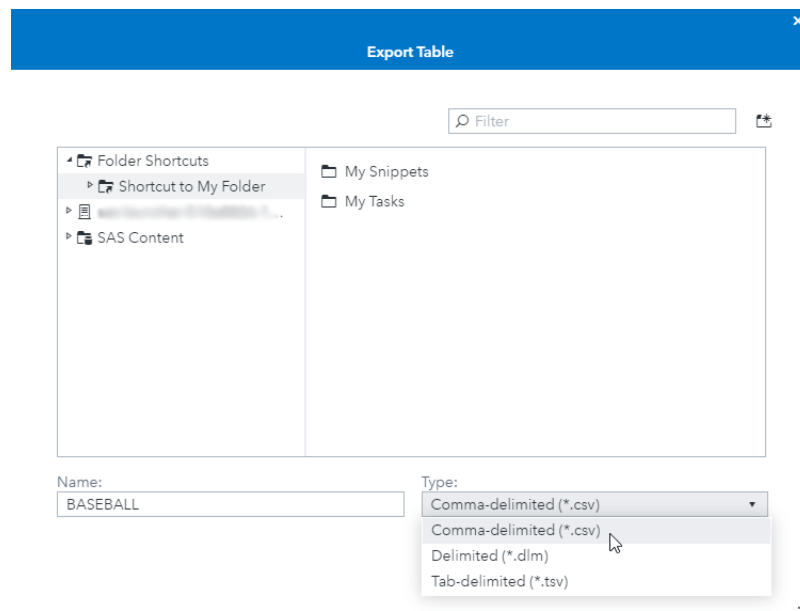

- 6 Click **Save** to export the file.

Note: When you export data, the entire file is exported. Any filters you might have applied to the data in the table viewer are not applied to the exported data.

Working with Results and Output Data

<i>Viewing Results</i>	133
<i>Default SAS Studio Output</i>	134
Viewing Default Results	134
Downloading Generated Data	135
<i>Sending Your Results to Another User</i>	135
<i>Viewing Output Data</i>	137
<i>About the SAS Output Delivery System and SAS ODS Statistical Graphics</i>	139

Viewing Results

When you run a task or a program in SAS Studio, the results are displayed in the work area. By default, results are generated as HTML5 output and displayed on the **Results** tab. Here are ways that you can work with your results:

- Add additional output formats, such as PDF, Word, RTF, Excel, and PowerPoint, by using the Preferences window.
- Download your generated output. You can download results that have been created in any of the available formats.
- Change the default output style for each format by using the Preferences window.

Default SAS Studio Output

Viewing Default Results

In SAS Studio, by default, output is generated in HTML5.

If you want to add output formats, you can use the Preferences window to select other formats, such as PDF and Word. You can also change the default style for your output to any of the ODS styles that are available. For more information, see [“Setting the Results Preferences” on page 186](#).

By default, the HTML5 results are the only results that are displayed on the **Results** tab. When you view your results, you can use the table of contents to navigate the different sections. By default, the table of contents is expanded, and you can click the section that you want to navigate to.

The screenshot shows the SAS Studio interface with the Results tab selected. The left pane shows the Data and Roles sections. The Data section is set to SASHELP.CLASS. The Roles section shows variables Name, Height, and Weight, with Age selected for grouping analysis. The right pane shows a table of contents for 'The Print Procedure' with sub-items for Age=11 through Age=16. The main area displays the data for Age=11, Age=12, and Age=13.

List Data for SASHELP.CLASS

Age=11

Obs	Name	Height	Weight
1	Joyce	51.3	50.5
2	Thomas	57.5	85.0

Age=12


Obs	Name	Height	Weight
3	James	57.3	83.0
4	Jane	59.8	84.5
5	John	59.0	99.5
6	Louise	56.3	77.0
7	Robert	64.8	128.0


Age=13

Obs	Name	Height	Weight
8	Alice	56.5	84
9	Barbara	65.3	98
10	Jeffrey	62.5	84

Downloading Generated Data

To download results that were generated in other formats, such as PDF or RTF, or as other types of data, such as a .csv or XML file:

- 1 Click  for the **Results** tab.

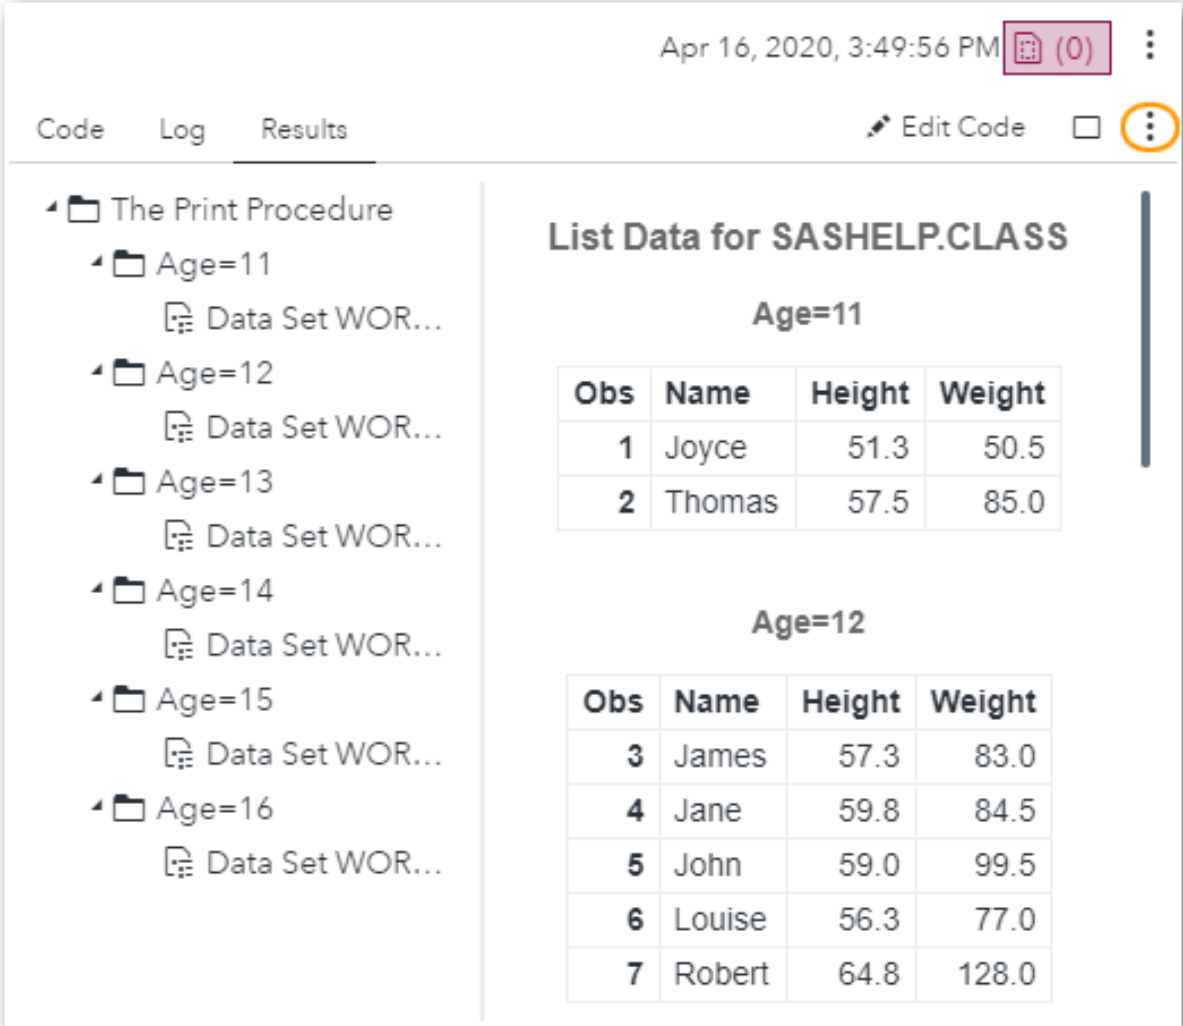

Apr 16, 2020, 3:49:56 PM (0)

Code Log Results Edit Code

The Print Procedure

- Age=11
 - Data Set WOR...
- Age=12
 - Data Set WOR...
- Age=13
 - Data Set WOR...
- Age=14
 - Data Set WOR...
- Age=15
 - Data Set WOR...
- Age=16
 - Data Set WOR...

List Data for SASHELP.CLASS

Age=11

Obs	Name	Height	Weight
1	Joyce	51.3	50.5
2	Thomas	57.5	85.0

Age=12

Obs	Name	Height	Weight
3	James	57.3	83.0
4	Jane	59.8	84.5
5	John	59.0	99.5
6	Louise	56.3	77.0
7	Robert	64.8	128.0

- 2 Select **Download** and the type for the results.

Sending Your Results to Another User


You can send a copy of your results and the associated code and log files to another user through email. Files that you can send include results in HTML5, RTF, and PDF formats as well as the code and log files that are associated with the



results. The code is sent as a SAS program file, and the log and program summary files are sent as HTML5 files. To send files through email, you need access to an SMTP server. For more information, contact your site administrator.




Note: If your SAS Studio email messages are being marked as junk, see [“Configuring the Mail Server” in SAS Studio: Administrator’s Guide](#).

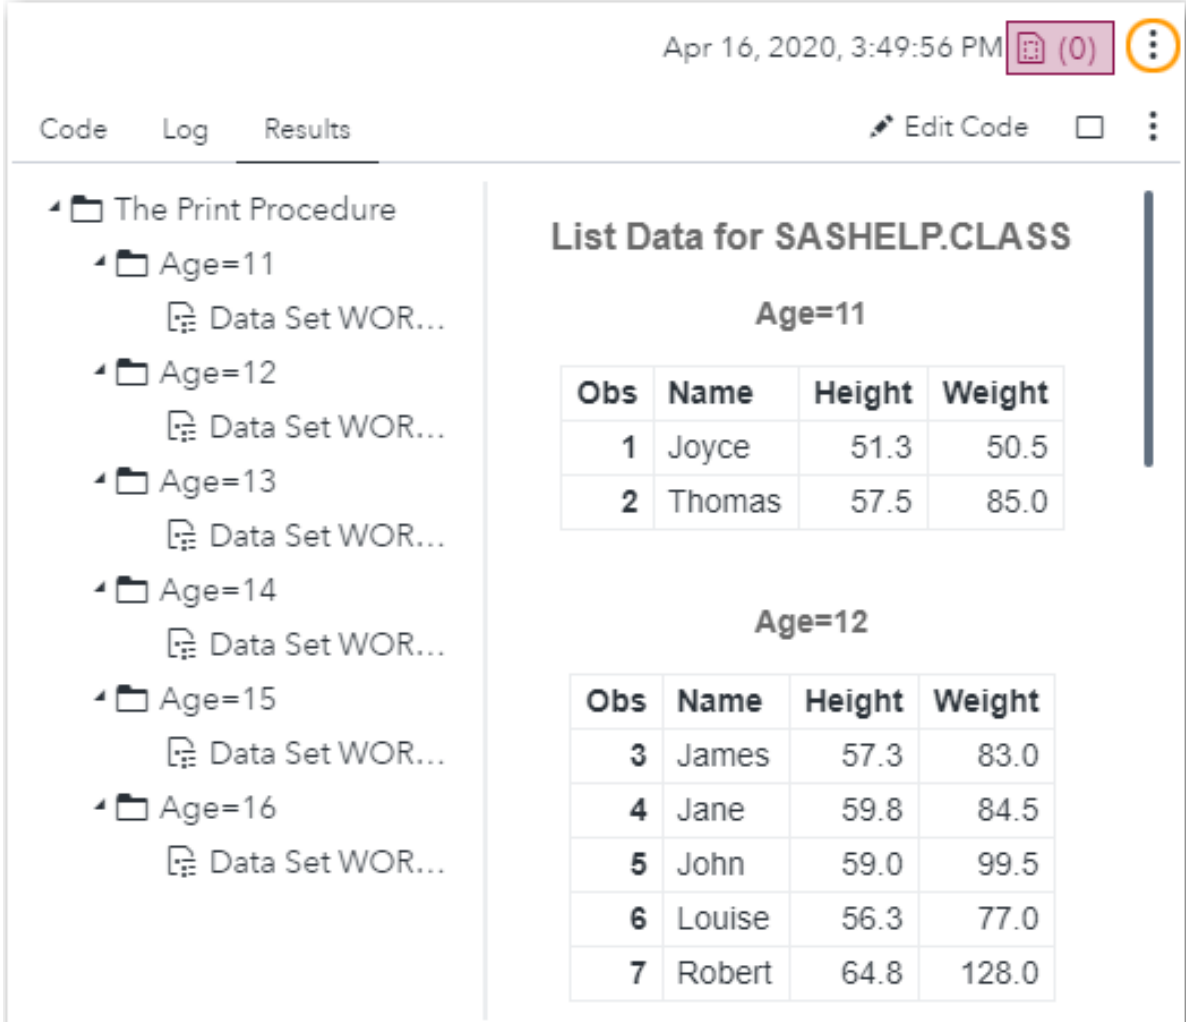To send results by email:

- 1 On the toolbar for the program, query, or task, click .



Apr 16, 2020, 3:49:56 PM  

Code Log Results  Edit Code  

The Print Procedure

- Age=11
 - Data Set WOR...
- Age=12
 - Data Set WOR...
- Age=13
 - Data Set WOR...
- Age=14
 - Data Set WOR...
- Age=15
 - Data Set WOR...
- Age=16
 - Data Set WOR...

List Data for SASHELP.CLASS

Age=11

Obs	Name	Height	Weight
1	Joyce	51.3	50.5
2	Thomas	57.5	85.0

Age=12

Obs	Name	Height	Weight
3	James	57.3	83.0
4	Jane	59.8	84.5
5	John	59.0	99.5
6	Louise	56.3	77.0
7	Robert	64.8	128.0

- 2 Select **E-Mail**. The E-Mail File window appears.

- 3 In the **To** box, enter the email addresses to which you want to send the files. Separate addresses with a semicolon.
- 4 If you want to send a copy of the email to another address, enter the address in the **CC** box.
- 5 In the **Subject** box, enter a subject for the email. You can also add a message to include in the body of the email.
- 6 Select the items that you want to include as attachments to your email. By default, the code is selected. If you select **Results**, all results that were generated are included in the email.
- 7 Click **Send** to send the message and attachments.


Viewing Output Data

When you run a program, task, query, or flow that generates a table or view, the output data is displayed on the Output Data tab. You can view and use data on the Output Data tab in the same ways that you can use a table or view that you open from the **Libraries** section of the navigation pane. For more information, see [“About the Table Viewer” on page 113](#).


By default, if your program, task, or flow generates multiple output tables, the list of tables is displayed in a collapsible pane.


Note: You can use the **View output data in a pane** option to switch between displaying the list of output tables in a pane or in a compact menu. For more information, see [“Setting General Preferences” on page 183](#).

You can customize how the output tables are displayed in the pane in these ways:

- Use the filter box at the top of the list to specify filter criteria for the table names.
- Specify a sort order for the tables by clicking  and selecting the appropriate order. By default, the tables are displayed in the order in which they are created.

Note: If you clear the **Sort output data sets in creation order** option, you can sort the tables only in ascending or descending order. For more information, see [“Setting General Preferences” on page 183](#).

- Specify whether to include the library name of each table by clicking  and selecting or clearing **Include library name**.
- If the output tables are in a flow, use the **Show temporary port tables** option to specify whether you want to include tables that are associated with output ports but not connected to Table nodes.

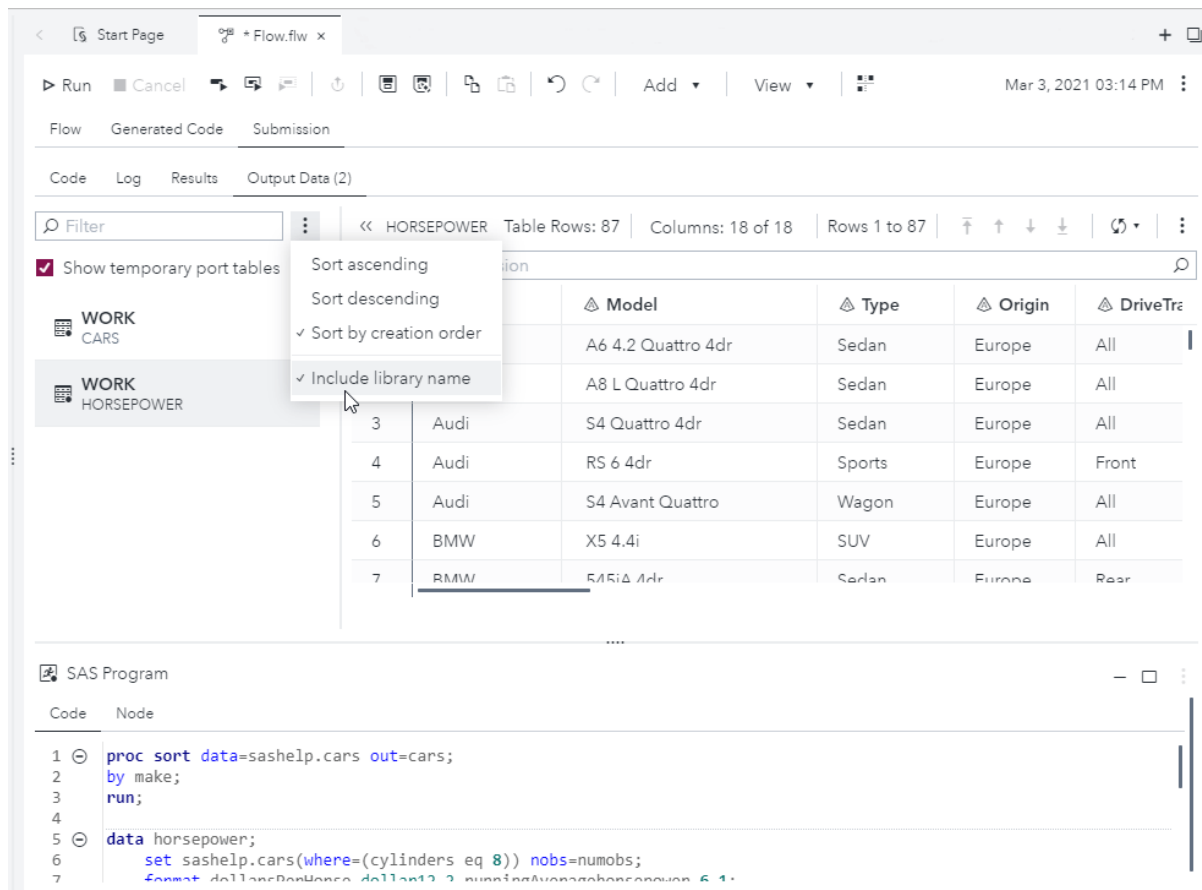

The screenshot shows the SAS Studio interface. The top pane displays the 'Output Data (2)' window for a table named 'HORSEPOWER'. The table has 87 rows and 18 columns. The visible columns are Model, Type, Origin, and DriveTr. The table is sorted by creation order, and the 'Include library name' option is checked. Below the table, the 'SAS Program' window shows the following code:

```

1 proc sort data=sashelp.cars out=cars;
2   by make;
3   run;
4
5 data horsepower;
6   set sashelp.cars(where=(cylinders eq 8)) nobs=numobs;
7   format dollar8comma2dollar12.2 num12comma8comma2dollar12.2;

```

About the SAS Output Delivery System and SAS ODS Statistical Graphics

The SAS Output Delivery System (ODS) gives you greater flexibility in generating, storing, and reproducing SAS procedure and DATA step output along with a wide range of formatting options. ODS provides formatting functionality that is not available when using individual procedures or the DATA step without ODS.

SAS Studio uses very specific ODS options and the GOPTIONS statements so that the output is displayed properly in the web environment. To view all of the ODS options in your code, click **Options > Preferences**. In the Preferences window, select **SAS Programs > Code and Log**, and then select the **Show generated code in the SAS log** option.

Note: To ensure that your output is displayed properly, do not change the settings of the ODS options or GOPTIONS statements in the generated code.

SAS ODS Statistical Graphics, more commonly referred to as SAS ODS Graphics, is an extension of the SAS Output Delivery System (ODS). ODS manages all output that is created by procedures and enables you to display the output in a variety of forms, including HTML and PDF.

Many SAS analytical procedures use ODS Graphics functionality to produce graphs. ODS Graphics uses the Graph Template Language (GTL) syntax, which provides the power and flexibility to create many complex graphs. The GTL is a comprehensive language for defining statistical graphics.

Understanding Git Integration in SAS Studio

<i>About Git Integration in SAS Studio</i>	142
<i>Working with Git Profiles</i>	143
Creating a Git Profile	143
Deleting a Git Profile	144
<i>Cloning and Opening a Git Repository</i>	145
<i>Creating a Local Repository</i>	147
<i>Understanding the Git Repository Tab in SAS Studio</i>	148
<i>Viewing the Commit History</i>	149
<i>Committing Changes to Your Local Repository</i>	150
<i>Pulling and Fetching Files</i>	154
<i>Pushing Files</i>	154
<i>Resetting Your Local Repository</i>	155
<i>Working with Branches in Git</i>	155
<i>Creating a Branch</i>	156
<i>Checking Out Branches</i>	157
<i>Understanding Merging and Rebasing</i>	158
<i>Merging Branches</i>	158
<i>Rebasing the Current Branch</i>	159
<i>Stashing Changes</i>	160
<i>Resolving Merge Conflicts</i>	160
<i>Deleting a Repository</i>	162
<i>Sample Git Workflow Scenario</i>	163

About Git Integration in SAS Studio

SAS Studio includes integration with Git, a system for tracking changes and managing version control among multiple users. Git can be used with many different repository hosting services such as GitHub and Bitbucket.


Note: This document assumes that you have a basic familiarity with Git technology and your repository hosting service.

Here are the requirements for using the Git functionality in SAS Studio:

- Standard perspective. For more information, see [“Understanding Perspectives” on page 31](#).
- Red Hat Enterprise Linux (RHEL), Windows WX6, or Windows W32 operating system. If you are using a SUSE Linux Enterprise Server, you need to install additional libraries. Contact SAS Technical Support at support@sas.com for assistance.

Note: If you are using a RHEL8 deployment, you must install the compat-openssl10 rpm. For more information, see [“Using Git Functions on a RHEL 8 Deployment” in SAS Studio: Administrator’s Guide](#).

- Your SAS Administrator must have specified the Git configuration properties. For more information, see [“Configuration Properties for Git Integration” in SAS Studio: Administrator’s Guide](#).

You can use the **Git Repositories** () section of the navigation pane to access the Git features that are available from within SAS Studio. These features include cloning repositories, committing and stashing file changes, pulling and pushing files, viewing your repository history, creating and merging branches, rebasing a branch, and performing a basic differentiation between files in your local repository. By default, SAS Studio uses SSH keys to authenticate with your repository hosting service.

Note: Contact your system administrator to use these means of authentication:

- HTTPS with a user name and password
 - Kerberos. To use Kerberos authentication, you must have Kerberos installed and configured on your SAS server.
-

You can also interact with a Git repository from SAS by using SAS Git functions in a SAS program. For more information, see [“Using Git Functions in SAS” in SAS Functions and CALL Routines: Reference](#).

Working with Git Profiles

Creating a Git Profile

Before you can get started using any of the Git features in SAS Studio, you must create a Git profile. By default, SAS Studio uses SSH keys for authentication. In order to use the SSH authentication, you must upload your public and private SSH keys to the server file system. For information about generating SSH keys, see the documentation for your repository hosting service.

TIP You can upload your SSH key files to the server file system by selecting the appropriate directory in the **Explorer** section of the navigation pane and clicking **T**. Click **+** and browse for the SSH key files. Select the files and click **Open**. Click **Upload** to upload the files to the directory on your server file system.

To create a Git profile, select **Options** ⇒ **Manage Git Connections** and click **+**. The Add a Profile window appears.

To create a Git profile using SSH keys, enter your profile name, user name, and a valid email address in the appropriate boxes. Click **Browse** to find your public and private SSH key files or enter the path names in the appropriate boxes. Click **OK** to create your profile.

The screenshot shows a dialog box titled "Add a Profile" with a blue header. It contains the following fields and values:


- Profile name: * (required): My Profile
- User name: * (required): MyUserName
- Email: * (required): user@company.com
- Public SSH file path: /sharedDrive/userid/sshkeys/id_ecdsa.pub
- Private SSH file path: /sharedDrive/userid/sshkeys/id_ecdsa

Buttons: OK, Cancel

To create a Git profile using HTTPS or Kerberos authentication, contact your system administrator about enabling the appropriate configuration property for the authentication that you want to use. For more information, see [“Configuration Properties for Git Integration”](#) in *SAS Studio: Administrator’s Guide*.

TIP To specify a default profile, select **Options** ⇨ **Manage Git Connections** and click **Profiles**. Select the profile that you want to use as your default profile, and click **Set as default**.

Deleting a Git Profile

To delete a profile, select **Options** ⇨ **Manage Git Connections** and click **Profiles**. Select the profile that you want to delete and click .

If the profile is used in the active repository, you cannot delete it until you close the active repository. If you delete a profile that is associated with other repositories, you cannot open those repositories until you use the Manage Git Connections window to associate them with another profile.

Cloning and Opening a Git Repository


In order to access the files from a Git repository in SAS Studio, you must clone the repository to a local repository on your server file system. When you clone the repository, a copy of all the files on the remote repository are copied to a working directory that you specify on your server file system. You can clone a repository from a remote server using SSH or HTTPS authentication, and you can also clone a local repository from your server file system.

Note: If an existing Git repository has been cloned to the server file system, then the Git repository is already a local repository and is available for you to access. However, if the Git repository is not on the server file system, you must clone it before you can access it.

You can access the files in the cloned repository by navigating to the directory in the **Explorer** section of the navigation pane. You can make changes to the files in the working directory, and then commit those changes to your local repository.


Note: Changes that you make to files in your local repository are not visible to other users until you push those changes to the remote repository.

To clone a Git repository:

- 1 In the navigation pane, click , and then click **Clone Repository** or click **Clone** on the toolbar of the **Git Repositories** section of the navigation pane. The Clone a Repository window appears.

TIP You can access the option to clone a repository in three ways:

- In the **Git Repositories** section of the navigation pane, click **Clone Repository**. This option is available only if there are no repositories listed in the **Git Repositories** section of the navigation pane.
- Click **Clone** on the toolbar of the **Git Repositories** section of the navigation pane. This option is available only if there are already repositories listed in the **Git Repositories** section of the navigation pane.
- Select **Options** ⇒ **Manage Git Connections**. In the Manage Git Connections window, click **Repositories**. Click **+** and select **Clone a repository**.

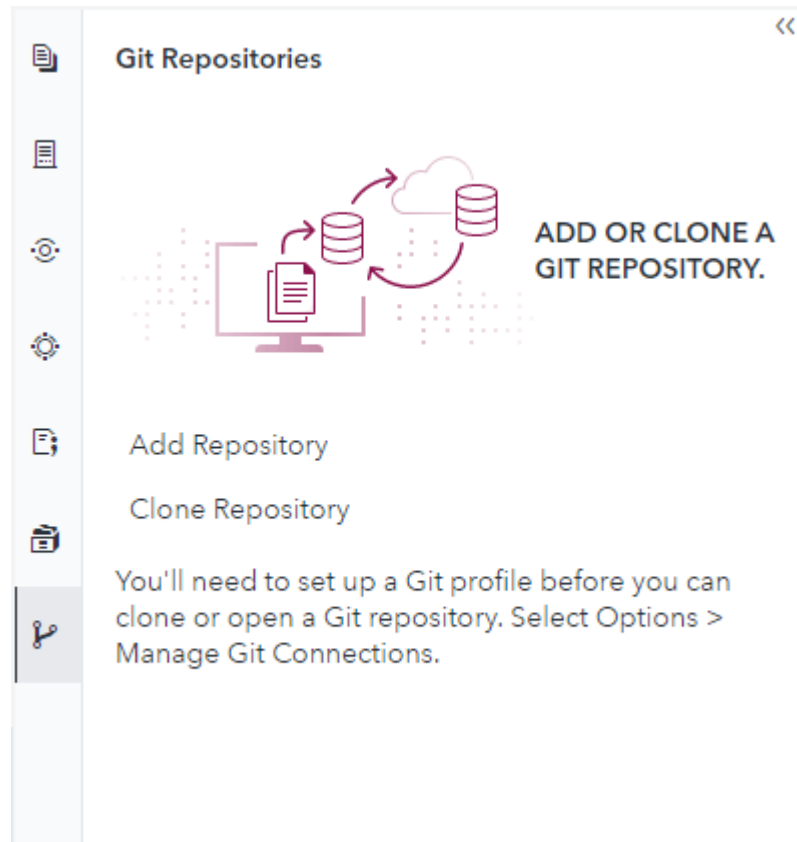

Note: To open an existing local repository, click **Add Repository** or use the **Add** toolbar button in the **Git Repositories** section of the navigation pane. In the Select a Folder window, browse to find the repository that you want to open and specify the Git profile.

- 2 In the **Repository** box, enter the location of the repository that you want to clone. You can clone a repository in three ways:
 - Use SSH keys to authenticate with your repository hosting service - enter a repository name in a format similar to one of these examples:

```
git@github.com:folder/sasgit.git
```

or

```
git@github.com:jquery/jquery-ui.git
```

Note: By default, SAS Studio uses SSH keys to authenticate with your repository hosting service.

- Use HTTPS authentication - enter a repository name in a format similar to this example:


```
https://github.com/example/repo.git
```
- Use a local repository - enter the full pathname of the local repository on your server file system.

Note: When you clone a local repository, you can pull files from the repository, but you cannot push any changes.

- 3 In the **Server location** box, enter the path name of a folder on your server file system for the cloned repository.

Note: You must select an empty folder for the cloned repository. If there are any files in the folder, the cloning operation cannot be completed.

- 4 From the **Profile** drop-down list, select the profile that you want to use to connect to the Git repository.

- 5 Click **Clone** to clone the repository. A Git repository tab opens in the work area. You can also view the files in the cloned repository by using the **Explorer** section of the navigation pane.


Note: You can rename a repository from the **Explorer** section of the navigation pane. Right-click the repository folder and select **Properties**. Enter the new name in the **Name** box.

Creating a Local Repository

You can create a local repository from a server file system folder in the **Explorer** section of the navigation pane. You can access the local repository in the **Git Repositories** section of the navigation pane and track and commit your changes. You can also associate the local repository with a remote repository and push your changes to the remote repository.

Note: You cannot create a local repository from a SAS Content folder.


To create a local repository:

- 1 In the **Explorer** section of the navigation pane, right-click the folder that you want to use as a local repository and select **Git initialize**. The folders tree refreshes and the folder is identified in the tree as a Git repository.
- 2 To view the new local repository, click  in the navigation pane. Double-click the new local repository to open it in the work area, if it does not open automatically. Notice that all of the files in the folder have been added to the repository as unstaged changes. To add the files to the repository, you must first stage the files and then commit them. For more information, see [“Committing Changes to Your Local Repository” on page 150](#).
- 3 To push the committed files to a remote repository, click **Push** on the Git repository tab. In the Create Remote Repository window, enter the location of the remote repository and click **Create**.

Understanding the Git Repository Tab in SAS Studio

When you clone a Git repository or open an existing Git repository from your server, a Git repository tab opens in the work area.

The Git repository tab contains two subtabs: History and Commit. The History subtab displays the history of all the changes, or commits, in a repository and enables you to view the differences between the selected and parent commits. The Commit subtab enables you to stage, unstage, reset, and commit changes to files in a repository. You can also view the differences between versions of a file.


To open your local Git repository tab, click  in the navigation pane and double-click the repository that you want to open. The Git repository tab opens in the work area.


Note: You can view only one Git repository in SAS Studio at a time.







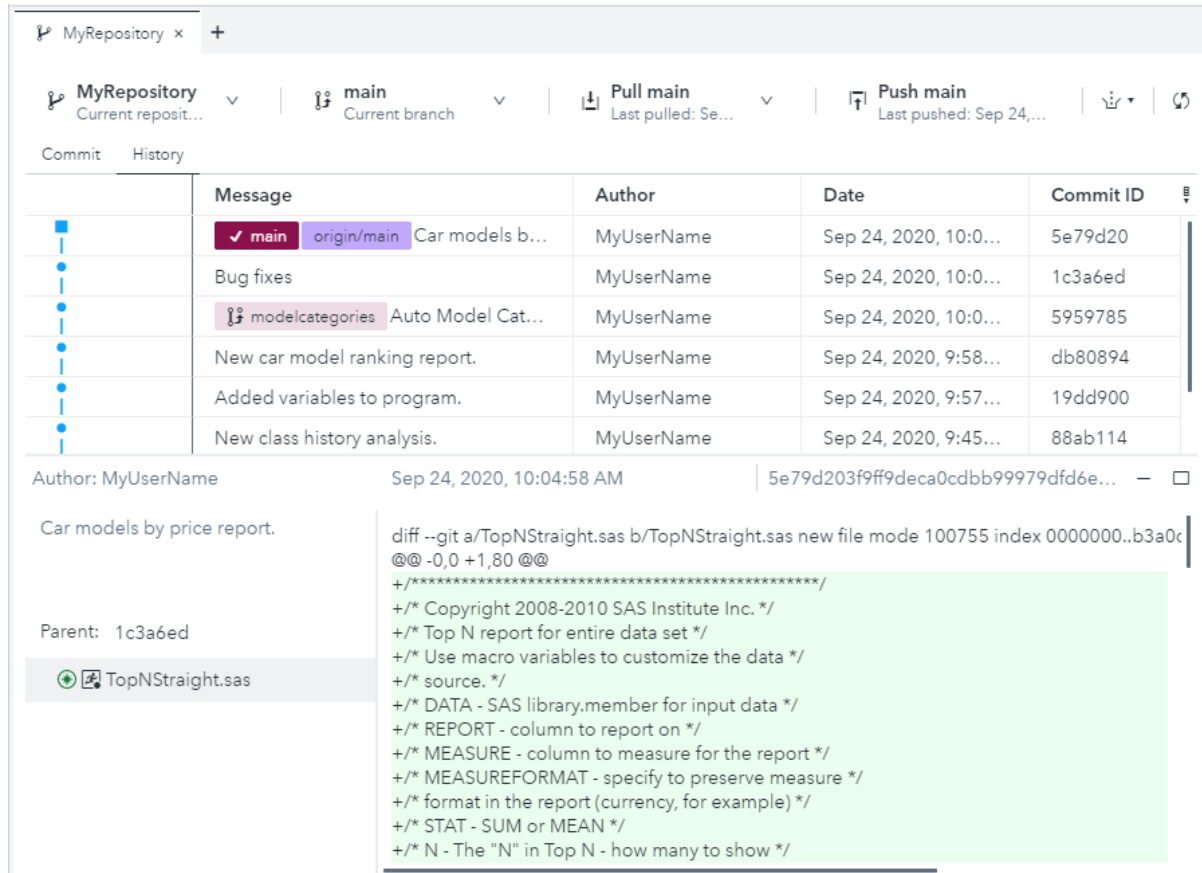


From the main Git repository toolbar, you can perform these tasks:

- Specify the local repository that you want to open.
- Check out a local branch.
- Pull or fetch data from the remote repository. For more information, see [“Pulling and Fetching Files” on page 154](#).
- Push committed changes to the remote repository. For more information, see [“Pushing Files” on page 154](#).
- Stash and reapply changes. For more information, see [“Stashing Changes” on page 160](#).

- Refresh the local repository.

Note: You can refresh the **Git Repositories** section of the navigation pane by clicking  on the Git Repositories tab and selecting **Refresh**.




Commit	Message	Author	Date	Commit ID
	  Car models b...	MyUserName	Sep 24, 2020, 10:0...	5e79d20
	Bug fixes	MyUserName	Sep 24, 2020, 10:0...	1c3a6ed
	 Auto Model Cat...	MyUserName	Sep 24, 2020, 10:0...	5959785
	New car model ranking report.	MyUserName	Sep 24, 2020, 9:58...	db80894
	Added variables to program.	MyUserName	Sep 24, 2020, 9:57...	19dd900
	New class history analysis.	MyUserName	Sep 24, 2020, 9:45...	88ab114

Author: MyUserName Sep 24, 2020, 10:04:58 AM 5e79d203f9ff9deca0cddb99979dfd6e... — □

Car models by price report.


Parent: 1c3a6ed

 TopNStraight.sas

```
diff --git a/TopNStraight.sas b/TopNStraight.sas new file mode 100755 index 0000000..b3a0c
@@ -0,0 +1,80 @@
+/* Copyright 2008-2010 SAS Institute Inc. */
+/* Top N report for entire data set */
+/* Use macro variables to customize the data */
+/* source. */
+/* DATA - SAS library.member for input data */
+/* REPORT - column to report on */
+/* MEASURE - column to measure for the report */
+/* MEASUREFORMAT - specify to preserve measure */
+/* format in the report (currency, for example) */
+/* STAT - SUM or MEAN */
+/* N - The "N" in Top N - how many to show */
```

Viewing the Commit History

You can use the commit history to view the history of all the changes to a repository. You can also view the details of a specific commit as well as the differences between two commits.


After you have saved your changes to the files in your working directory, make sure the tab for your local Git repository tab is open in the work area. Click the **History** subtab. A list of all the commits made in that repository is displayed in the work area in reverse chronological order. For each commit, the commit message, the author, the date and time of the commit, and the commit ID are displayed by default. To modify which columns are displayed, click  and select the columns that you want to be displayed.

Note: By default, up to 1,000 rows are loaded in the commit history. You can specify a different limit by selecting **Options** ⇒ **Manage Git Connections**. Click

Options and enter a new value in the **Maximum rows loaded in history log** option. Increasing the number of rows that are loaded might affect your performance.

To view the details of a specific commit, select the commit from the commit history. The details of the commit are displayed in the lower section of the work area. You can view the details of the parent of the selected commit by clicking the parent commit ID in the details.

To view the differences between changes in the selected commit and the parent commits, click a file in the lower section of the work area. You can also compare two adjacent commits from the commit history list by selecting the commits that you want to compare.

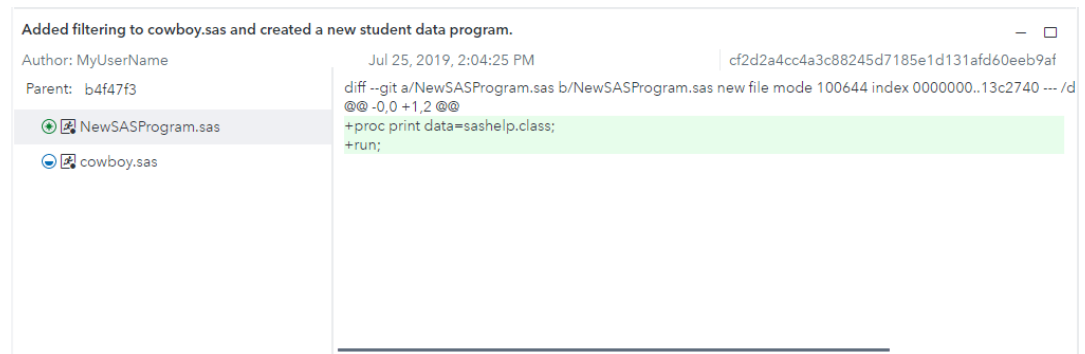


Note: To view the file differences in a separate window, right-click the differences section of the work area and select **Open in new window**.

Committing Changes to Your Local Repository







Before you can push one or more changes from your local Git repository to the remote repository, you must first commit the changes from your working directory to your local repository. When you commit files, you stage the files that you want to include in the commit by moving the files from the Unstaged changes area to the Staged changes area. Next, you must enter a comment describing the commit, and then commit the files. When you select files to commit, it is a good practice to group changes that are related and represent a state in your project development that you want to capture.

Note: When you commit a change to the local repository, those changes are still not viewable by other users, but the changes are available for you to push to the remote repository.

To commit changes to your local repository:


- 1 After you have saved your changes to the files in your working directory, make sure your local Git repository tab is open in the work area. Click the **Commit** subtab.
- 2 If your changed files are not listed in the Unstaged changes area, click  to refresh the list.

Files in the staging area are identified by a status icon that indicates the type of change:

-  – a new file to be added to the local repository.
-  – a renamed file.
-  – an existing file with changes.
-  – a deleted file.
-  – a file with content that is very similar or identical to another file in the local repository.
-  – a file with a merge conflict.

The screenshot shows the 'Commit' tab in SAS Studio. At the top, there are two tabs: 'History' and 'Commit', with 'Commit' being the active tab. Below the tabs, the interface is divided into two main sections. The first section is titled 'Unstaged changes (2)' and contains two files: 'NewSASProgram.sas' and 'cowboy.sas'. Each file has a small icon to its left and a circular status icon to its right. 'NewSASProgram.sas' has a green plus sign, indicating it is staged for commit. 'cowboy.sas' has a blue minus sign, indicating it is not staged. The second section is titled 'Staged changes (0)' and contains the text 'No items', indicating that no changes are currently staged. Below these sections is a text input field with the placeholder text 'Enter a commit comment'. At the bottom of the interface is a large blue button labeled 'Commit Staged'.


Note: Autosaved files that include ~ in the file name are not included in the list of unstaged files.

- 3 Select one or more changes that you want to commit and click . When you select files to commit, it is a good practice to group changes that are related and belong together in a single commit.

TIP You can also stage and unstage files by double-clicking them.

Note: Changes that you do not stage are not included in the commit. Your changes remain in your working directory and in the Unstaged changes area until you commit them.

The screenshot shows the 'Commit' tab of a version control interface. At the top, there are two tabs: 'History' and 'Commit', with 'Commit' being the active tab. Below the tabs, the interface is divided into two main sections. The first section is titled 'Unstaged changes (0)' and contains the text 'No items'. To the right of this section are two icons: a downward-pointing arrow with a plus sign and an upward-pointing arrow with a plus sign. The second section is titled 'Staged changes (2)' and contains two files: 'NewSASProgram.sas' and 'cowboy.sas'. To the right of these files are two icons: a green plus sign in a circle and a blue minus sign in a circle. Below the staged changes section is a text input field with the placeholder text 'Enter a commit comment'. At the bottom of the interface is a large blue button labeled 'Commit Staged'.

Note: To stage all changed files at one time, click .

TIP You can view the differences between the versions of a SAS program file in the staging area and your local repository by clicking the file on the **Commit** tab. File differences are not highlighted for task, query, and flow files, so you should consider documenting changes in the commit comment.

To discard the changes to a file in the staging area and reset the file to the version in your local repository, right-click the file and select **Reset**. If the file that you have reset is open in the work area, you are prompted to either reload the version from your local repository or retain the edited version.

- 4 In the comments box, enter a description of the changes in the files that you are committing, and then click **Commit Staged**. The changed files are now available to be pushed to the remote repository.

Pulling and Fetching Files

You can download data from the remote repository to your local repository in two ways: pulling and fetching. The pull feature enables you to download the files from the remote repository and update your local repository to make sure you have the latest content. If you have made changes to some of the files in your local repository, Git merges the content from the remote repository with your local files. To pull files from the remote repository, make sure the tab for your local Git repository is open in the work area, and then select **Pull *branch-name*** ⇒ **Pull**.

Note: SAS Studio displays a message if there is a conflict between files in the remote and local repositories when you pull the remote files. If a conflict occurs, the conflicted files are moved to the Unstaged changes area. After you resolve the conflicts, you can commit the files again. Files that are pulled from the remote repository and do not have any conflicts are staged for the commit.

The fetch feature downloads the files from the remote repository, but fetching does not merge any changes into your current working branch. To fetch files from the remote repository, make sure the tab for your local Git repository is open in the work area. Next, select **Pull *branch-name*** ⇒ **Fetch** and specify whether you want to fetch changes from a specific branch or from all branches.

Pushing Files

After you have staged and committed your changed files from your working directory to your local repository, you can push them to the remote repository. When you push your committed changes to the remote repository, you are synchronizing files in your local repository with the remote repository.

To push your files to the remote repository, make sure the tab for your local Git repository is open in the work area. Click **Push *branch-name*** on the toolbar. The commit history shows your committed changes merged into the remote repository.

Resetting Your Local Repository

You can undo commits that you have made by resetting your local repository to a prior commit.

To reset your local repository:

- 1 Make sure the commit history is open for your local repository. Right-click the commit that you want to reset and select **Reset**. The Reset Local Repository window appears.
- 2 Select the type of reset that you want to perform:
 - **Soft** – resets the current branch to the prior commit. No changes are made to the staged changes (the index) or your working directory.
 - **Mixed** – resets the current branch to the prior commit and resets your staged changes (the index). No changes are made to your working directory.
 - **Hard** – resets the current branch to the prior commit, resets your staged changes (the index), and discards all changes in your working directory. You cannot undo a hard reset.
- 3 Click **OK** to reset your repository.

Working with Branches in Git

Your work in Git is managed in branches. The default branch in your remote repository is identified as the origin/main branch. The default branch in your local repository is identified as the main branch. You can create additional branches and merge branches. When you push your committed changes to the remote repository, you are synchronizing files in a branch in your local repository with the branch in the remote repository. You can use the History subtab to see the commits that are associated with a branch and whether branches are synchronized. For more information, see [“Viewing the Commit History” on page 149](#).

In this example, the main branch is ahead of the origin/main commit by one commit. This lack of synchronization indicates that you have made changes to the local main branch that are not included in the remote origin/main branch because the "New graph program" commit has not yet been pushed to the remote repository. For more information, see [“Pushing Files” on page 154](#).

Commit	Message	Author	Date	Commit ID
✓ main	New graph program	MyUserName	Sep 24, 2020, 11:2...	ca051e3
origin/main	Car models by price re...	MyUserName	Sep 24, 2020, 10:0...	5e79d20
	Bug fixes	MyUserName	Sep 24, 2020, 10:0...	1c3a6ed
modelcategories	Auto Model Cat...	MyUserName	Sep 24, 2020, 10:0...	5959785
	New car model ranking report.	MyUserName	Sep 24, 2020, 9:58...	db80894
	Added variables to program.	MyUserName	Sep 24, 2020, 9:57...	19dd900

After the “New graph program” commit has been pushed to the remote repository, the origin/main and main branches are synchronized and are listed on the same line in the commit history.

Commit	Message	Author	Date	Commit ID
✓ main origin/main	New graph pr...	MyUserName	Sep 24, 2020, 11:2...	ca051e3
	Car models by price report.	MyUserName	Sep 24, 2020, 10:0...	5e79d20
	Bug fixes	MyUserName	Sep 24, 2020, 10:0...	1c3a6ed
modelcategories	Auto Model Cat...	MyUserName	Sep 24, 2020, 10:0...	5959785
	New car model ranking report.	MyUserName	Sep 24, 2020, 9:58...	db80894
	Added variables to program.	MyUserName	Sep 24, 2020, 9:57...	19dd900

For more information about managing branches in Git, see the documentation for your repository hosting service.

Creating a Branch

You can create a branch in Git in order to separate work that you are doing in the repository from other work that you are doing. When you create a branch, the commits in that branch are separated from your other commits until you merge the branch with another branch.

Note: When you have multiple branches, you can check out the branch that you want to work in by using the **Current branch** drop-down list at the top of your Git repository tab. You can also right-click the branch in the commit history and select **Checkout branch** ⇨ **branch-name**. For more information, see [“Checking Out Branches” on page 157](#).

To create a branch:

- 1 Make sure the History subtab is open for your local repository. Right-click the commit with which you want to start a new branch and select **Create new branch**. The Create a Branch window appears.
- 2 In the **Branch name** box, enter a name for your new branch. The branch name can contain letters, numbers, and some special characters, such as hyphens or underscores. The branch name must also follow these rules:
 - The name cannot include a blank, two consecutive periods (..), multiple consecutive slashes (//), an at sign followed by a curly bracket (@{}), or the “ | ~ ^ : ? * [\ characters.
 - The name cannot consist of only an at sign (@).
 - The name cannot begin or end with a slash (/).
 - The name cannot end with a period (.
- 3 If you want to create a branch but remain in the current branch, clear the **Checkout after create** check box. This option is selected by default.
- 4 If you want to discard any changes in your working directory that you have not committed when the branch is created, select the **Force if duplicate branch name exists** check box. This option is not selected by default.
- 5 Click **Create** to create the branch. Your local repository now contains the files from the commit that you selected for creating the branch.

X

Create a Branch

All uncommitted changes will be moved to the new branch.

Create branch at:

Auto Model Category Count report 59597855fdbdb8a6831432ca1942f7fd003

Branch name:

modelcategories

Checkout after create

Force if duplicate branch name exists

Create Cancel

⋮

Checking Out Branches

To open a branch in your working directory, you must check out the branch.

You can check out local branches by using the **Current branch** drop-down list at the top of the Git tab or by right-clicking the local branch in the commit history and selecting **Checkout branch** ⇒ **branch-name**.

If you want to work with a remote branch that does not have a corresponding local branch, you can create a local copy of that branch in your working directory in one of the following ways:

- Create a local branch with the same name as the remote branch. For more information, see “[Creating a Branch](#)” on page 156.
- Right-click the remote branch in the commit history and select **Checkout branch** ⇒ **branch-name**. A local version of the branch is created and checked out.

Note: If you check out a remote branch that already has a corresponding local branch, the remote branch is merged into the local branch.

Understanding Merging and Rebasing

Both merging and rebasing are used to integrate changes from one branch into another branch.

When you merge one branch into another, Git combines the changes from the commit sequences in each branch. A merge conflict occurs when Git encounters something in a file that has been changed in both branches. You must resolve any conflicts manually before the merge can be completed. After the merge is complete, you can still view the history of both branches. The existing branches are not changed in any way.

When you rebase a branch, you are moving an entire branch so that it begins on the tip of another branch. Rebasing enables you to incorporate all of the commits in one branch into another branch. You must resolve any conflicts manually before the rebase can be completed. Unlike merging, rebasing rewrites the project history and creates a linear project history. You can no longer view the original branch histories separately.

TIP You should never rebase a public branch, such as main, onto a new branch because this action can create problems for other users of the public branch.

Merging Branches

When you have completed work in a branch, you can merge the work in that branch into another branch.

To merge a branch:

- 1 Make sure the commit history is open for your local repository. In the **Current branch** drop-down list, select the branch into which you want to merge the new branch. For example, to merge *newbranch* with the main branch, you would need to check out the main branch.
- 2 Right-click the branch that you are merging, and select **Merge into current-branch-name** ⇒ **new-branch-name**. For example, to merge *newbranch* with the main branch, you would right-click *newbranch* and select **Merge into main** ⇒ **newbranch**. The current branch in the commit history list is updated with the latest commit from the new branch.

Note: If you are merging a branch into a branch that is not checked out, right-click the latest commit in the current branch, and select **Merge with branch** ⇒ **branch-name**.

Note: SAS Studio displays a message if there is a conflict between files when you merge the branches. If a conflict occurs, the conflicted files are moved to the Unstaged changes area on the Commit subtab. After you resolve the conflicts, you can complete the merge by staging and committing the files.

Rebasing the Current Branch

You can use the rebase feature to move a branch to a new base commit. When you rebase a branch, the branch appears to have been created from a different commit. Rebasing is a powerful feature that enables you to change the history of your repository.

To rebase a branch:

- 1 Make sure the commit history is open for your local repository. From the **Current branch** drop-down list, select the branch that you want to rebase. For example, to rebase *newbranch* onto the main branch, you would need to check out the *newbranch* branch.
- 2 Right-click the branch that you want to use as the new base commit, and select **Rebase branch-name on** ⇒ **Selected commit**.


Note: SAS Studio displays a message if there is a conflict between files when you rebase the branches. If a conflict occurs, the conflicted files are moved to the Unstaged changes area on the Commit subtab. After you resolve the conflicts, stage and commit the files and continue the rebase.

Stashing Changes

You can use the stash feature to save any uncommitted changes (both staged and unstaged) that you are not yet ready to push to the remote repository. When you stash changes that you have made to one or more files, the changes are removed from the working copy of the files and saved until you are ready to reapply them.

When you reapply the changes to your files, you can choose to delete or save the changes in your stash.

Note: When you stash changes, all updated and uncommitted files in the repository are affected.


To use the stash feature, make sure the tab for your local Git repository is open in the work area. Click  on the toolbar and choose from the following options:

- **Stash** – saves all uncommitted changes to the files in your local repository and removes the changes from the local files.
- **Pop stash** – reapplies all saved changes to the files in your local repository and deletes the changes from your stash.
- **Delete stash** – deletes the saved changes in your stash. When you delete the changes in your stash, you cannot reapply them to your local files.
- **Apply stash** – reapplies all saved changes to the files in your local repository and saves the changes in your stash.


Resolving Merge Conflicts

Sometimes when you are working in a shared repository, you can encounter an error because you and a coworker have made changes to the same lines in a file. SAS Studio identifies the conflict in the file when you attempt to merge your changes from your local branch. In SAS Studio, merging occurs when you pull files from a remote repository, merge work from one branch into another branch, and use the Pop stash and Apply stash options.

For example, an error can occur when a coworker pushes a change to a file and you attempt to push a change to the same file without first pulling your coworker's updates to the file. When a file has a conflict and you attempt to pull from the remote repository or perform another merge operation, SAS Studio displays an error message and provides information to help you resolve the conflict. SAS Studio automatically documents the conflicts by adding information to the file to identify the conflicts that exist between the local and remote versions of the file. The file is moved back to the Unstaged Changes area of the Commit tab so that you can resolve the conflict.

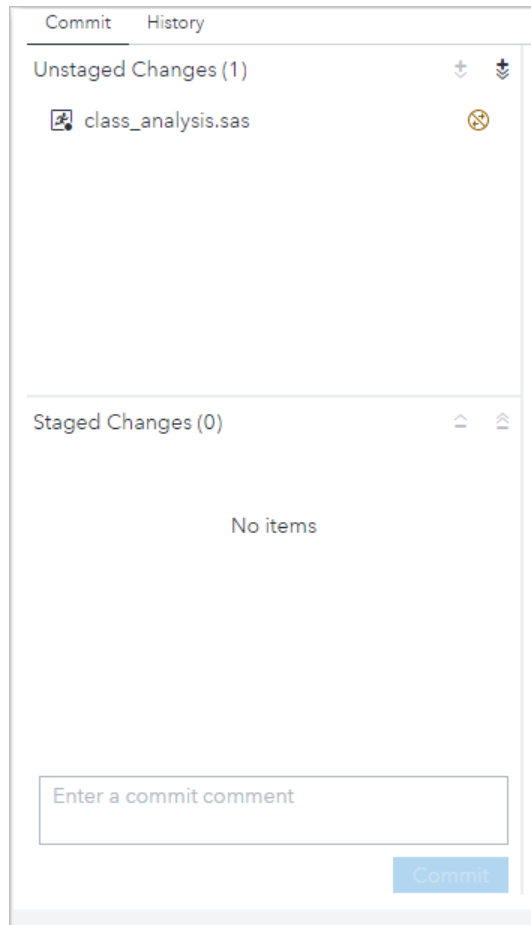

To view the conflicts in the file, click the file in the Unstaged Changes area. The file is displayed in the area to the right of the Commit tab. View the documentation about the conflict that SAS Studio inserted in the file: the Local section contains the changes from your local commit, and the Remote section contains the conflicting lines from the commits that you pulled from the remote repository.

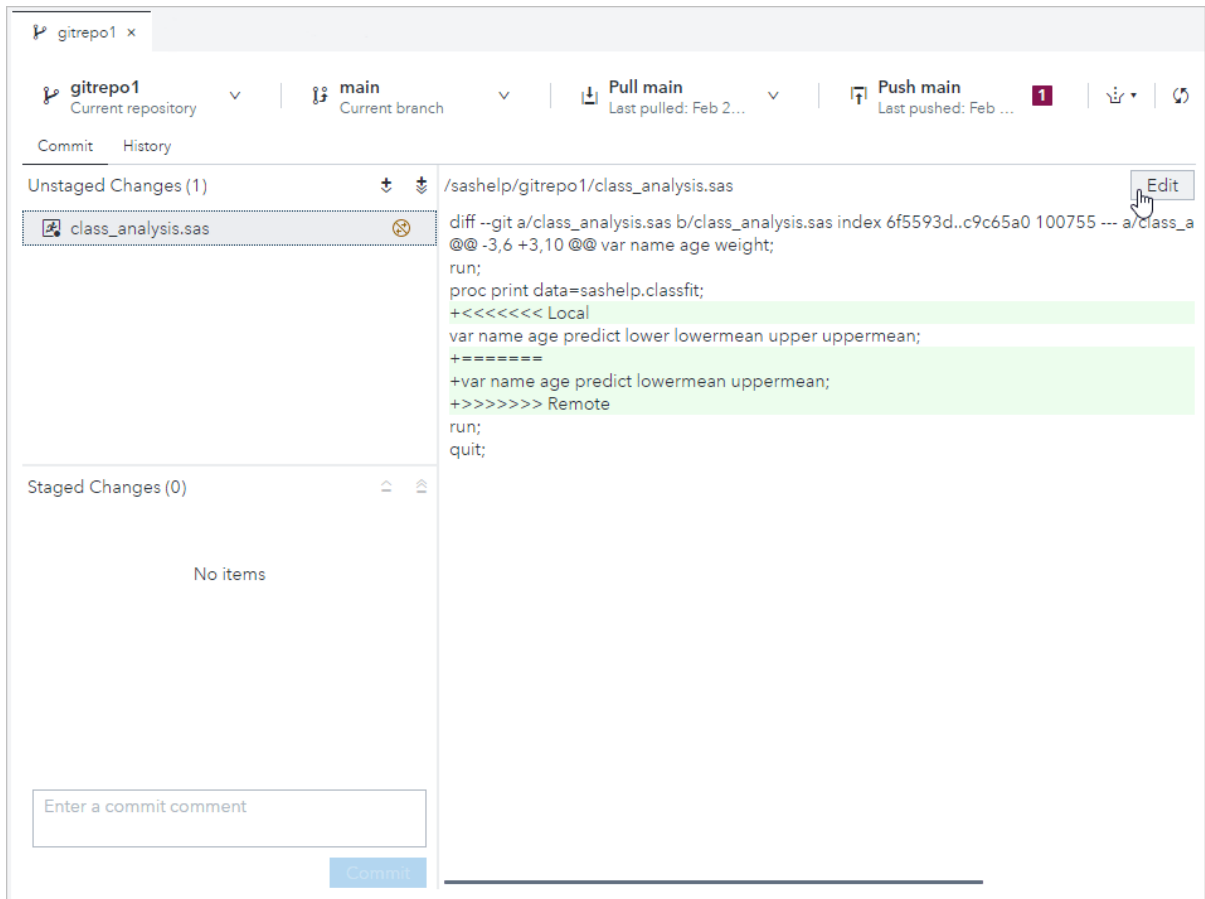


To resolve the conflicts in the file, click **Edit**. The file opens in a new tab in the work area. Edit the file as needed (considering both sets of changes), and then save the file. Click the Git repository tab, and then stage and commit the updated file.

Deleting a Repository

You can delete the local repository on your server file system. You can choose whether you want to delete all the files in the working directory when you delete the repository.

To delete a local repository:

- 1 Select **Options** ⇒ **Manage Git Connections**. Click **Repositories** and select the repository that you want to delete. Click .
- 2 Select the type of delete that you want to perform:
 - **Soft** – deletes only the Git repository definition.

Note: After a soft delete, you can still view the folder using the **Explorer** section of the navigation pane. If you want to use the folder as a local Git repository again, you must right-click the folder and select **Git initialize**.

- **Mixed** – deletes the Git repository definition and removes any Git configuration information from the local repository directory. The files in your working directory are not deleted.

Note: After a mixed delete, you can still view the folder using the **Explorer** section of the navigation pane. If you want to use the folder as a local Git repository again, you must right-click the folder and select **Git initialize**.

- **Hard** – deletes the Git repository definition, the local repository directory, and all files in the local working directory.

3 Click **Delete** to delete the repository.

Note: You can also delete a repository from the **Explorer** section of the navigation pane. Right-click the working directory and select **Delete**. Click **Delete** in the confirmation window, and then select the type of delete that you want to perform.

Sample Git Workflow Scenario

Suppose you need to help out on a project that stores its SAS programs in a Git repository. You need to make some minor changes to one program and add a new program to the project.

In this sample Git scenario, you clone a repository to your server file system, commit and push some changes, and create a branch. Then you merge the new branch with the main branch and push the changes.

- 1 Create a profile so that you can access Git repositories in SAS Studio.
 - a Select **Options** ⇨ **Manage Git Connections**. Make sure **Profiles** is selected, and then click **+** to open the Add a Profile window.
 - b Enter the credentials necessary to access your Git repository and click **OK**.

Add a Profile

Profile name: *

My Git Profile

User name: *

myusername

Email: *

username@domain.com

Public SSH file path:

C:/Users/Documents/ssh_keys/id_rsa.pub

Private SSH file path:

C:/Users/Documents/ssh_keys/id_rsa

OK Cancel

- 2 Clone your team's repository to your server file system so that you can access the files in the project.
 - a In the **Git Repositories** section of the navigation pane, click **Clone a Repository**.
 - b In the Clone a Repository window, specify the remote repository and the location on your server file system that you want to use.

Clone a Repository

Repository:

git@github.com:myrepo/dataanalysis.git
 https://github.com/example/repo.git
 git@bitbucket.org/exmple/repo.git

Server location:


/UsersData/myfolder






Profile:


My Git Profile

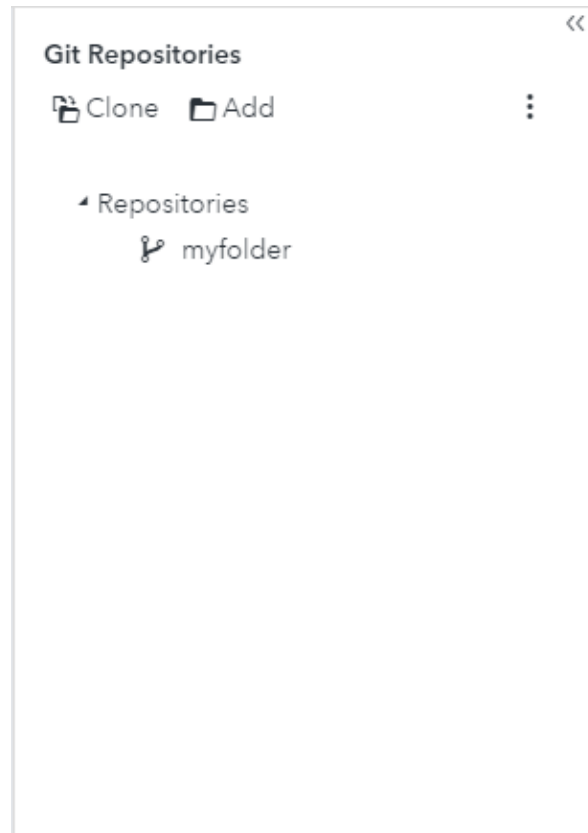Clone Cancel


- c Click **Clone** to create the repository. The repository is added to the **Git Repositories** section of the navigation pane.



- 3 Open the program that you need to update from your local repository, make your changes, and save the program.
 - a Click  in the navigation pane to open the **Explorer** section and navigate to your working directory.
 - b Double-click the SAS program that you want to edit and make your changes. Click  to save your changes.
- 4 Stage your changed files, enter a commit message, and commit your files to your local repository.
 - a Click  in the navigation pane, and then double-click the repository to open it in the work area. Make sure the **Commit** tab is selected. If your changed file is not listed in the Unstaged changes area, click  to refresh the list.
 - b Select the updated file and click  to move the file to the Staged changes area.

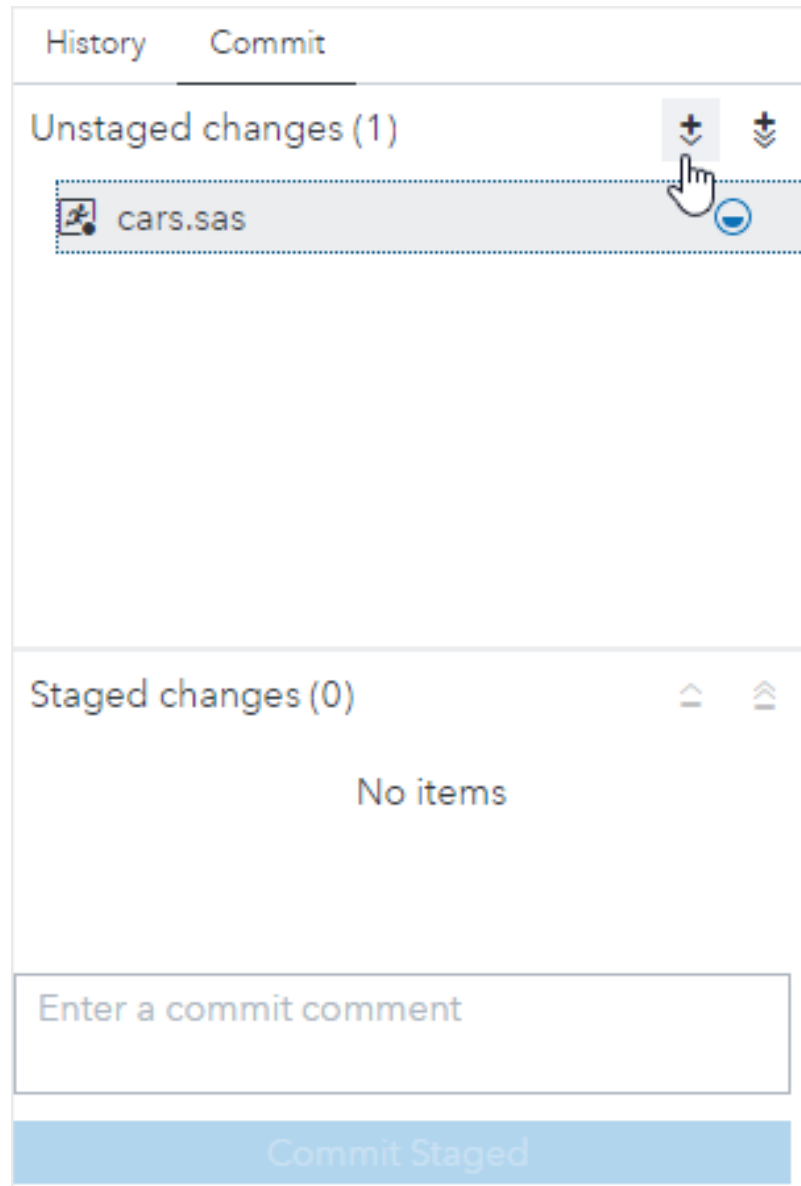

- c Enter your commit comments in the commit box and click **Commit Staged**.

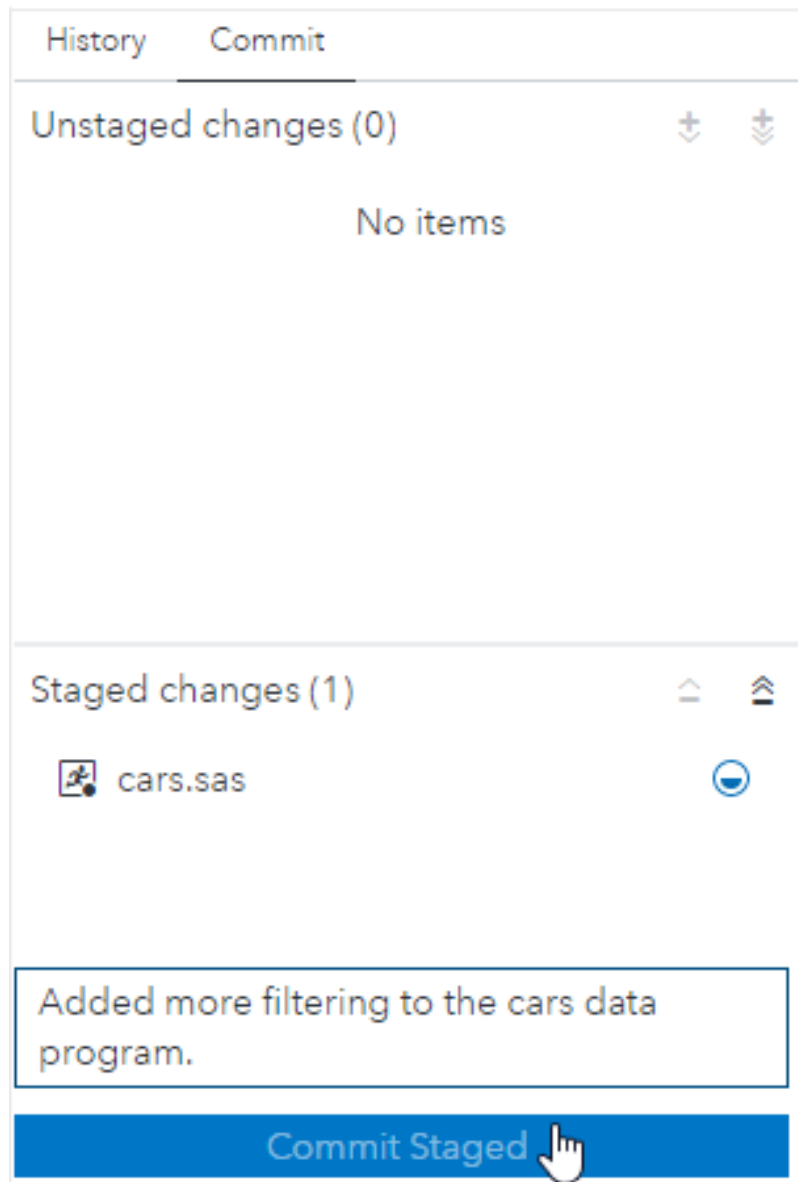

Your changed file is committed to the local repository.

- d View your commit history by clicking **History** on your Git repository tab. Notice that your commit is listed at the top of the commit history list. Your commit currently exists only in the main branch of your local repository. The main branch of your local repository is identified by `main`.

The second commit in the list represents the state of the main branch on the remote repository. The main branch on the remote repository is identified by `origin/main`.

When you push your changes to the remote repository, your commit is then part of the `origin/main` branch on the remote repository.

The screenshot shows the SAS Studio Git interface for a repository named 'myfolder'. The current branch is 'main'. The commit history table is as follows:

Commit	Message	Author	Date	Commit ID
✓ main	Updated filter criteria	myusername	Sep 25, 2020, 3:50:0...	a3f3540
origin/main	Added sorting	myusername	Sep 25, 2020, 3:33:4...	3730eac
	Bug fixes and added more filtering	myusername	Sep 25, 2020, 3:27:3...	1ffd29e
	Code revisions	myusername	Sep 25, 2020, 3:25:4...	5d12259
	New car model ranking report	myusername	Sep 25, 2020, 3:23:3...	83be033
	performance enhancements	myusername	Sep 25, 2020, 3:21:2...	3eedfea

The diff view for the selected commit (a3f35409451e58158bd99a9ad7638ac7b...) shows the following changes to the file 'car_models.sas':

```

diff --git a/car_models.sas b/car_models.sas index eea4087..8081358 100755 --- a/car_models.sas
@@ -1,4 +1,4 @@
proc sql;
-select * from sashelp.cars where Make = "BMW" and Type = "Sedan"
+select * from sashelp.cars where Make in ('BMW', 'Audi') and Type = "Sedan"
order by MSRP;
run;

```

5 Pull the files from the remote repository and push your committed files.

TIP It is good practice to pull the files from the remote repository before you push to make sure you do not have any conflicts.

- a On your Git repository tab, select **Pull *branch-name*** ⇒ **Pull**. Your local repository is updated with the latest content from the remote repository. Any changes in the remote repository are merged with your local files. If there is a conflict between files in the remote and local repositories, SAS Studio displays a message so that you can resolve the conflict before you proceed.
- b Click **Push *branch-name*** to push your changed file to the remote repository. Your commit history is updated. Notice that your commit is now part of the remote origin/main branch.

	Message	Author	Date	Commit ID
■	✓ main origin/main Updated filter cr...	myusername	Sep 25, 2020, 3:50:0...	a3f3540
●	Added sorting	myusername	Sep 25, 2020, 3:33:4...	3730eac
●	Bug fixes and added more filtering	myusername	Sep 25, 2020, 3:27:3...	1ffd29e
●	Code revisions	myusername	Sep 25, 2020, 3:25:4...	5d12259
●	New car model ranking report	myusername	Sep 25, 2020, 3:23:3...	83be033
●	performance enhancements	myusername	Sep 25, 2020, 3:21:2...	3eedfea

Author: myusername Sep 25, 2020, 3:50:03 PM a3f35409451e58158bd99a9ad7638ac7b... - □

Updated filter criteria

```
diff --git a/car_models.sas b/car_models.sas index eea4087..8081358 100755 --- a/car_models.sas +@@ -1,4 +1,4 @@
proc sql;
-select * from sashelp.cars where Make = "BMW" and Type = "Sedan"
+select * from sashelp.cars where Make in ('BMW', 'Audi') and Type = "Sedan"
order by MSRP;
run;
```

Parent: 3730eac

car_models.sas

- 6 Create a branch to keep your work separate from the main branch. Add a new program, test it, and commit your changes to that branch.
 - a In the commit history list, right-click your commit and select **Create new branch**. The Create a Branch window appears.
 - b Enter a name for the branch and click **Create**. Notice that the **Checkout after create** option is selected so that the new branch is checked out and is the active branch that you are working in.

Create a Branch ✕

All uncommitted changes will be moved to the new branch.

Create branch at:

Branch name:

Checkout after create

Force if duplicate branch name exists

In the commit history list, notice that the new carsdata branch, the remote origin/main branch, and your local repository main branch are all synchronized and displayed on the same line.

The screenshot shows the SAS Studio Git interface. At the top, it displays the current repository 'myfolder', the current branch 'carsdata', and actions like 'Pull carsdata' and 'Push carsdata'. Below this is a commit history table with columns for Message, Author, Date, and Commit ID. The first commit is highlighted, showing a message 'performance enhancements' and a commit ID of '3eedfea'. Below the table, the diff view for the selected commit is shown, displaying the changes to the file 'car_models.sas'. The diff shows a change in the SQL query, adding 'BMW' and 'Audi' to the list of car makes.

Commit	Message	Author	Date	Commit ID
✓ carsdata main origin/main Up...	performance enhancements	myusername	Sep 25, 2020, 3:21:2...	3eedfea
	New car model ranking report	myusername	Sep 25, 2020, 3:23:3...	83be033
	Code revisions	myusername	Sep 25, 2020, 3:25:4...	5d12259
	Bug fixes and added more filtering	myusername	Sep 25, 2020, 3:27:3...	1fd29e
	Added sorting	myusername	Sep 25, 2020, 3:33:4...	3730eac

```

diff --git a/car_models.sas b/car_models.sas index eea4087..8081358 100755 --- a/car_models.sas
@@ -1,4 +1,4 @@
proc sql;
-select * from sashelp.cars where Make = "BMW" and Type = "Sedan"
+select * from sashelp.cars where Make in ('BMW', 'Audi') and Type = "Sedan"
order by MSRP;
run;

```

- c Use the **Explorer** section of the navigation pane to create a program and save it in your working directory.
- d Stage the new program and commit it to the new carsdata branch in your local repository. Notice in the commit history list that your commit in the carsdata branch is not synchronized with the remote origin/main branch or the local main branch.


The screenshot shows a Git client interface with the following components:

- Repository and Branch:** myfolder (Current repository), carsdata (Current branch).
- Actions:** Pull carsdata (Last pulled: Sep ...), Push carsdata (Last pushed:).
- Commit History Table:**


Commit	Message	Author	Date	Commi...
2c33d14	✓ carsdata Adding car pricing report	myusername	Sep 28, 2020, 3:20...	
a3f3540	main origin/main Updated filter criteria	myusername	Sep 25, 2020, 3:50...	
3730eac	Added sorting	myusername	Sep 25, 2020, 3:33...	
1ffd29e	Bug fixes and added more filtering	myusername	Sep 25, 2020, 3:27...	
5d12259	Code revisions	myusername	Sep 25, 2020, 3:25...	
83be033	New car model ranking report	myusername	Sep 25, 2020, 3:23...	
- Current Commit Details:**
 - Author: myusername
 - Date: Sep 28, 2020, 3:20:24 PM
 - Commit Hash: 2c33d14538847972a6bea6611a6e56c2f...
 - Message: Adding car pricing report
 - Parent: a3f3540
- Diff View:**

```
diff --git a/carspricingreport.sas b/carspricingreport.sas new file mode 100755 index 0000000..dabf
@@ -0,0 +1,3 @@
+proc print data=sashelp.cars;
+var make model MSRP Invoice;
+run;
```
- File List:** carspricingreport.sas

- 7 When your new program is complete, merge the new branch back into the main branch and perform a final pull from and push to the remote repository.
 - a When you are ready to merge the carsdata branch into the main branch, you must first check out the main branch. Select the main branch from the Current branch drop-down list. In the confirmation window, click **Reload** to make sure that all of your changes are saved.

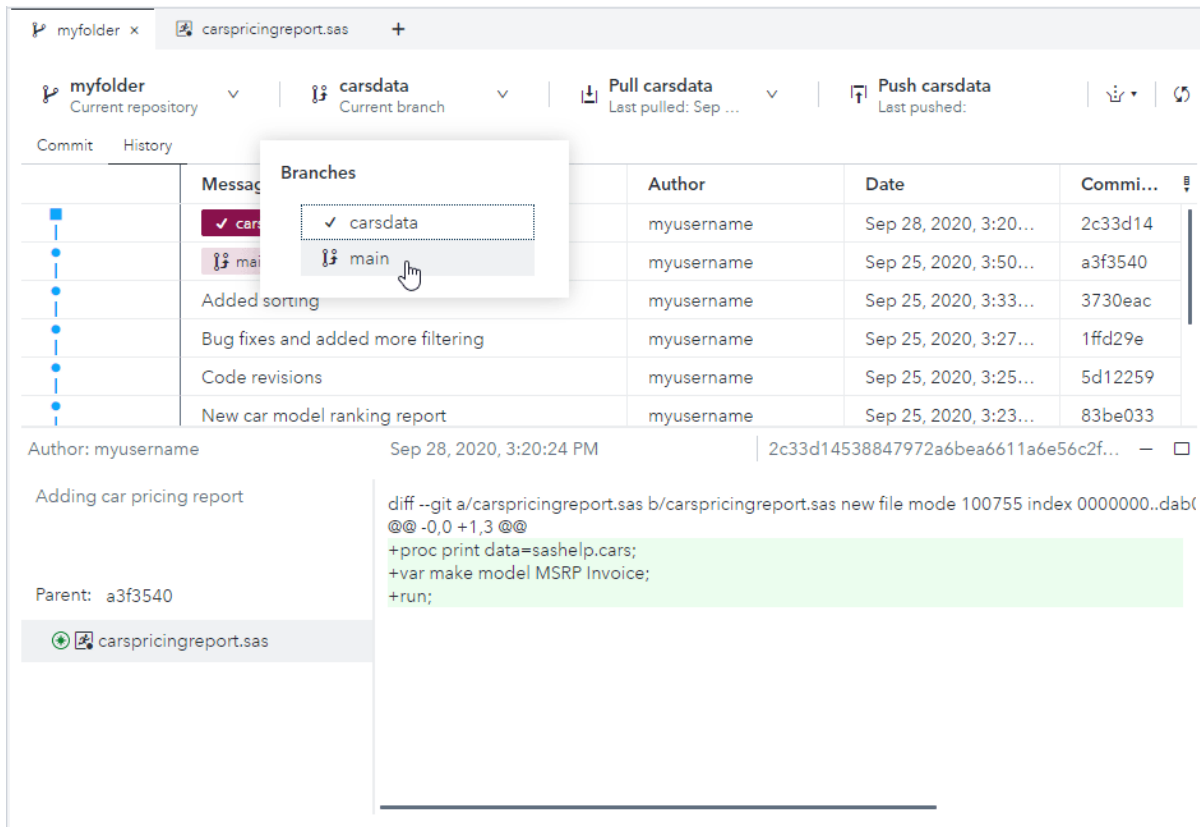

In the commit history list, right-click the carsdata branch and select **Merge into main** ⇒ **carsdata**.

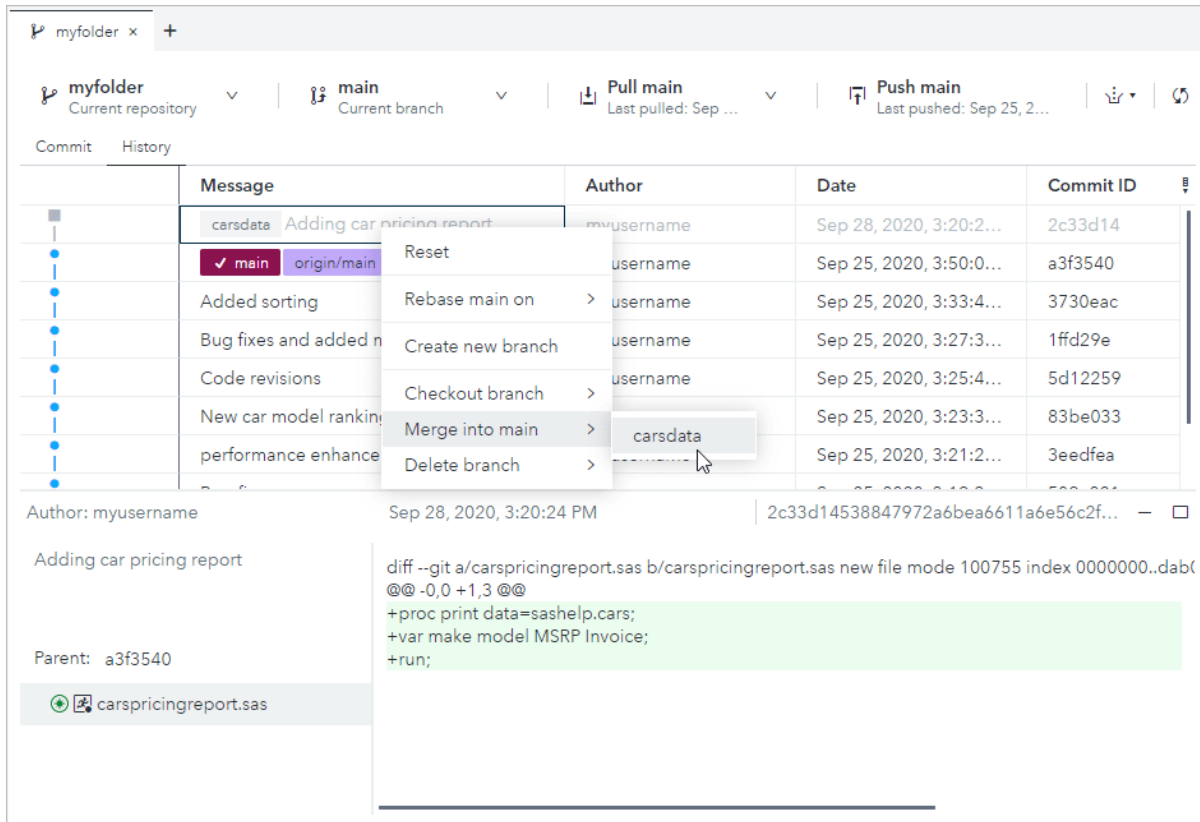

Notice in the commit history list that the main branch has been updated with the new file from the carsdata branch.

The screenshot shows a Git client interface for a repository named 'myfolder'. The current repository is 'myfolder' and the current branch is 'main'. The interface displays the commit history and a diff view for the most recent commit.

Commit	Message	Author	Date	Commit ID
	carsdata ✓ main Adding car prici...	myusername	Sep 28, 2020, 3:20:2...	2c33d14
	origin/main Updated filter criteria	myusername	Sep 25, 2020, 3:50:0...	a3f3540
	Added sorting	myusername	Sep 25, 2020, 3:33:4...	3730eac
	Bug fixes and added more filtering	myusername	Sep 25, 2020, 3:27:3...	1fd29e
	Code revisions	myusername	Sep 25, 2020, 3:25:4...	5d12259
	New car model ranking report	myusername	Sep 25, 2020, 3:23:3...	83be033
	performance enhancements	myusername	Sep 25, 2020, 3:21:2...	3eedfea

The diff view for the commit 2c33d14538847972a6bea6611a6e56c2f... shows the following changes:

```
diff --git a/carspricingreport.sas b/carspricingreport.sas new file mode 100755 index 0000000..dabc
@@ -0,0 +1,3 @@
+proc print data=sashelp.cars;
+var make model MSRP Invoice;
+run;
```

The parent commit is a3f3540. The file 'carspricingreport.sas' is shown as a new file added in the commit.

- b** On the **Git** tab, select **Pull main** ⇒ **Pull**.
- c** Click **Push** to push your changes to the remote repository. Your commit history is updated. Notice that the local main branch, which was merged with the carsdata branch, and the remote origin/main branch are now synchronized.

myfolder x +

myfolder Current repository | main Current branch | Pull main Last pulled: Sep ... | Push main Last pushed: Sep 28, 2...

Commit History

	Message	Author	Date	Commit ID
	Ad...	myusername	Sep 28, 2020, 3:20:2...	2c33d14
	Updated filter criteria	myusername	Sep 25, 2020, 3:50:0...	a3f3540
	Added sorting	myusername	Sep 25, 2020, 3:33:4...	3730eac
	Bug fixes and added more filtering	myusername	Sep 25, 2020, 3:27:3...	1ffd29e
	Code revisions	myusername	Sep 25, 2020, 3:25:4...	5d12259
	New car model ranking report	myusername	Sep 25, 2020, 3:23:3...	83be033
	performance enhancements	myusername	Sep 25, 2020, 3:21:2...	3eedfea

Author: myusername Sep 28, 2020, 3:20:24 PM 2c33d14538847972a6bea6611a6e56c2f... - □

Adding car pricing report

Parent: a3f3540

carspricingreport.sas

```
diff --git a/carspricingreport.sas b/carspricingreport.sas new file mode 100755 index 0000000..dabf
@@ -0,0 +1,3 @@
+proc print data=sashelp.cars;
+var make model MSRP Invoice;
+run;
```

Understanding Tasks in SAS Studio

<i>What Is a Task?</i>	175
<i>How to Run a Task</i>	175
<i>Edit a Predefined Task</i>	177
<i>Create a Custom Task</i>	177
<i>Specifying the Options for the Task Code</i>	178

What Is a Task?

A task is an XML and Apache Velocity code file that generates SAS code and formats results for you. Tasks include SAS procedures from simple data listings to complex analytical procedures. SAS Studio is shipped with several predefined tasks that are available in the Standard perspective. The tasks are organized into categories. Some categories and their tasks might not be available at your site because you do not have the required SAS product.

For more information about each of these tasks, see [SAS Studio: Task Reference Guide](#).

How to Run a Task

To run a predefined task:


- 1 In the navigation pane, click  to open the **Tasks** pane.

2 Expand the folder that contains the task.

Note: You can hide one or more tasks and task folders by right-clicking the selected tasks or task folders in the navigation pane and selecting **Hide**. Hidden tasks and task folders are displayed with an updated icon in the navigation pane and cannot be run. To show hidden tasks and task folders, right-click the tasks or task folders and select **Show**.

3 Right-click the task name and select **Open task**. Alternatively, you can double-click the task to open it.

The task opens to the right of the work area.

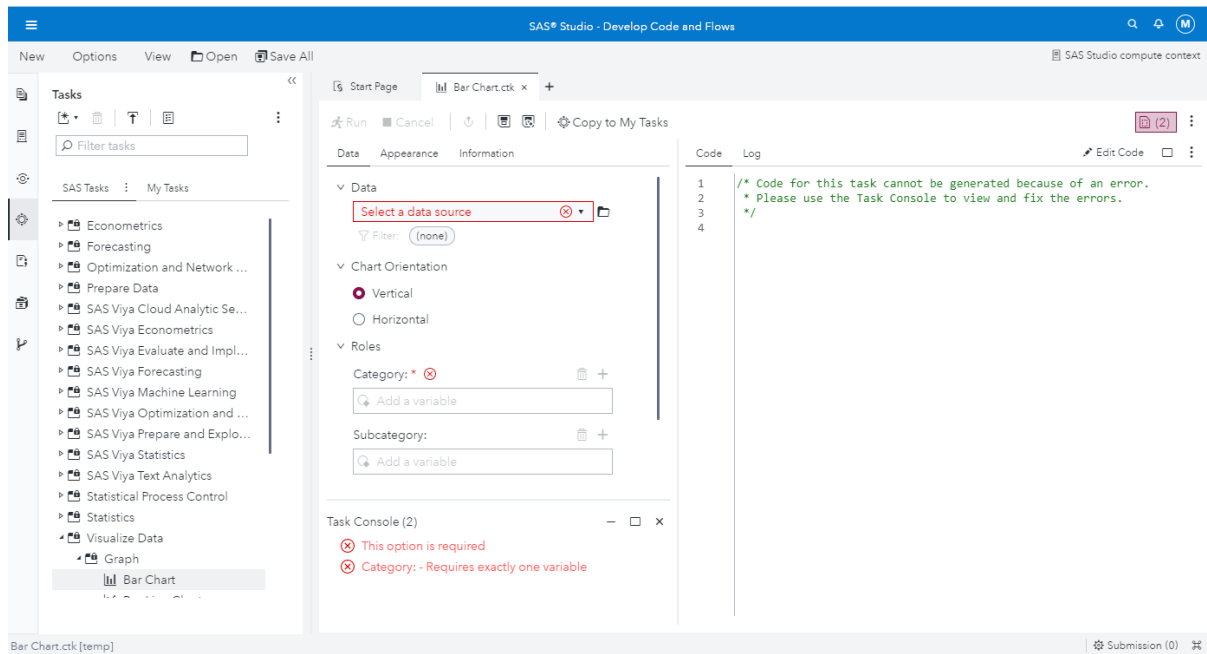

4 If the **Data** tab is available, specify an input data source and select columns for the roles in the data source. A role is a description of a variable's purpose in the task. To add a column to a role, click **+**. A list of available columns for that role appears. If multiple columns can be assigned, you can press Ctrl or Shift to select multiple columns from the list and click **OK**.

5 On the remaining tabs, specify any other required options, which are denoted with a red asterisk. As you assign values to the task, the relevant SAS code is generated. For more information about the options available for each task, see [SAS Studio: Task Reference Guide](#).


TIP The **Task Console** displays any information required to run the task.

6 To run the task, click **Run**.

Edit a Predefined Task

To customize the predefined tasks for your site, you can edit the XML code that is used to create the task.



To edit a predefined task:


- 1 In the navigation pane, click  to open the **Tasks** pane.
- 2 Expand the folder that contains the task.
- 3 Right-click the name of the task that you want to edit and select **Copy as task template**. You can choose to save the task in My Tasks or the Explorer.
- 4 Specify a name and description for the task. By default, the name and description from the predefined task is used.
Click **OK**.
- 5 Right-click the copied task and select **Edit task template**. The CTM file for the task appears in a new tab.
- 6 Edit the XML file and save your changes. To preview your changes, click **Open**.

Create a Custom Task

SAS Studio provides a template that you can use to create custom tasks for your site.

To create a custom task:

- 1 In the navigation pane, click  to open the **Tasks** pane.
- 2 Click  and select **Task**. A blank task template opens.

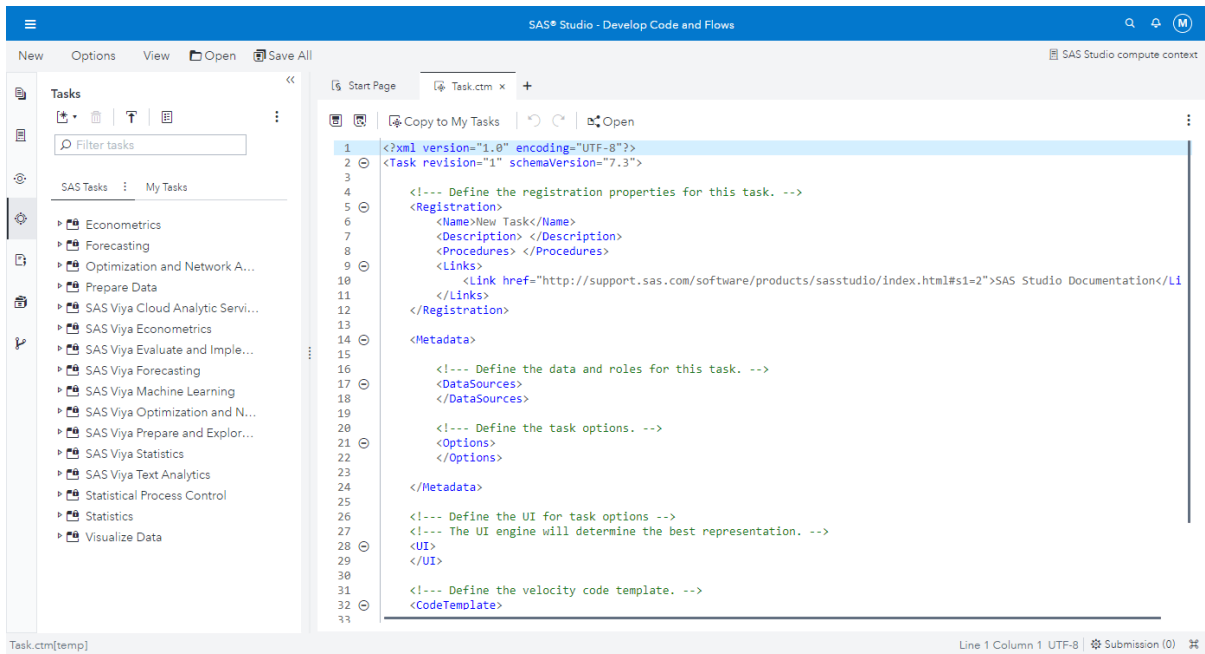

3 Edit the code in the task template to create your task. To view the user interface for the task template, click **Open**. For more information about this file, see [SAS Studio: Developer's Guide to Writing Custom Tasks](#).

4 Click .

Specifying the Options for the Task Code

The Preferences window enables you to change several options that affect what and how the task code is displayed.

To access these options, select **Options** ⇒ **Preferences**. In the Preferences window, click **Tasks**.

For more information, see “Setting Task Preferences” on page 192.

Appendix 1

Customizing SAS Studio

<i>About Customizing SAS Studio</i>	179
<i>Creating Global Settings</i>	180
About the Settings Window	180
Specifying the General Settings	180
Specifying the Region and Language Settings	181
Specifying the Accessibility Settings	181
<i>Setting Your Preferences</i>	182
About the Preferences Window	182
Setting the Start-Up Preferences	182
Setting General Preferences	183
Setting the Code and Log Preferences	185
Setting the Results Preferences	186
Setting Editors Preferences	188
Setting General Code Editor Preferences	189
Setting Appearance Options in the Code Editor	190
Setting Tables Preferences	191
Setting Task Preferences	192
Setting Flow Preferences	193
Setting Background Submit Preferences	193
Setting Query Preferences	194
Setting Import Preferences	194

About Customizing SAS Studio

You can customize SAS Studio by changing the global settings, such as theme and locale, and by specifying application preferences, such as code editor and table viewer options.

Creating Global Settings

About the Settings Window

The Settings window enables you to specify settings for the appearance theme, locale, and accessibility. To change the global settings, click the user button in the application bar and select **Settings**.

Specifying the General Settings

From the **General** page, you can specify these options for SAS Studio.

Options	Description
Theme	<p>Enables you to change the appearance of the SAS Studio web application. The theme specifies the collection of colors, graphics, and fonts that appear in the application. You can choose from SAS themes or custom themes, if you have any available.</p> <ul style="list-style-type: none"> ■ Use the default theme (<i>theme-name</i>) — uses the default theme as specified by your system administrator. ■ Choose a theme — enables you to select a theme. You can choose from these SAS themes: <ul style="list-style-type: none"> High Contrast Presents a dark background with high-contrast foreground elements to meet the needs of users with low vision. Dark Presents a dark user interface that enables graphs, visualizations, and other elements to stand out. Light Includes a clean and uncomplicated color palette that is easy to use. This is the default theme. <p>The theme change takes effect after you close the Settings window.</p>
Reset to show all warning and information messages	Displays warnings and messages that you previously chose to hide.
Profile picture	Displays your profile picture.

Specifying the Region and Language Settings

From the **Region and Language** page, you can specify these options.

Options	Description
Locale for regional formats and sorting	Specifies the locale that is used for sorting data and formatting values such as dates, times, numbers, and currency. The default setting is the browser locale. Changes take effect after you sign out and sign back in.
Locale for offline processes	Specifies the locale that is used for offline jobs or background processes such as report distributions or notifications. The default setting is the locale of the Java Runtime Environment.

Specifying the Accessibility Settings

From the **Accessibility** page, you can specify these options.

Options	Description
Enable sounds	Enables audio indicators for events that occur within the user interface.
Enable visual effects	Adds visual effects that indicate state changes. For example, when this setting is enabled, you see a subtle movement in the user interface if you delete an item.
Adjust the display duration for pop-up notifications	Enables you to specify the length of time in seconds that pop-up notifications are displayed. The default value is 5 seconds.
Invert application colors	Displays SAS Studio in inverted colors.
Display tooltips when using the keyboard to navigate	Displays the tooltips for each item in the application in a pop-up window as you navigate with the keyboard. You can specify where in the browser window you want to display the tooltips.
Customize the focus indicator settings	Enables you to customize the attributes of the outline that indicates which user interface component is active.

Setting Your Preferences

About the Preferences Window

The Preferences window enables you to customize several options in SAS Studio.

To change your preferences, select **Options** ⇒ **Preferences**.

.....

Note: Preferences do not apply to nodes in a flow.

.....

Setting the Start-Up Preferences

From the **Start Up** page, you can specify these options for starting SAS Studio.



Option	Description
Load a workspace configuration file	Enables you to select a workspace configuration file (.workspace) that specifies the configuration when a SAS Studio session starts. For more information, see “Using a Workspace Configuration File to Customize Your Start-up” on page 6.
Tabs to Open	<p>Specifies the tabs to be displayed when you start the SAS Studio application. You can choose from these options:</p> <ul style="list-style-type: none"> ■ None starts SAS Studio with no tabs open in the work area. This option is selected by default. ■ Restore tabs listed in Open Files pane restores the tabs that were open in your prior session of SAS Studio. When this option is selected, the tabs are also restored if you switch between the Standard and Interactive perspectives in a SAS Studio session. Any temporary files that were open are not restored. <p>Note: The tabs are not necessarily restored in the same order they were in when you closed SAS Studio. Tabs that display a large amount of data can take longer to open and might be opened last.</p> ■ Open a new file enables you to choose whether to open a new program or flow tab. If you are using the Interactive perspective, this option opens a SAS program tab.
Show Start page	Opens the Start Page tab when you start the SAS Studio application. To automatically close the Start Page tab when you

Option	Description
	open another tab in the work area, select Automatically dismiss .
Restore open folder state in Explorer pane	Automatically reopens the folders that were expanded in the Explorer section of the navigation pane in your prior session of SAS Studio.

Setting General Preferences

From the **General** page, you can set these options.

Option	Description
Display tab after submission	Specifies the tab to display after you run a program or a task. You can choose to display the code, log, or results tabs. If you are running the Standard perspective, you can also choose to display output data tab. The Results tab is displayed by default.
When activating output data tabs, automatically open	Specifies which output data tab to display when you run a program or task that generates data.
View output data in a pane	Displays the list of output data for programs, tasks, and flows in a collapsible pane. If this option is not selected, then the list of output data is displayed in a compact menu.
Sort output data sets in creation order	Enables you to sort your output data sets in the order in which they were created. This option is selected by default and can affect your performance if you are generating a large number of output data sets. If you clear this option, the output data sets can be sorted only in ascending or descending order. By default, the output data sets are sorted in ascending order. For more information, see “Viewing Output Data” on page 137 .
Display warning if text files are larger than specified size	Displays a warning when you open a text file that is larger than the specified size in megabytes (MB). Text files include file types such as *.sas, *.txt, and *.csv. If you open a file that is larger than the specified size, the file is truncated and opened in Read-Only mode. The default size is 10 MB.
Default text encoding	Specifies the character-set encoding that is used when text files, such as *.sas programs, are read or written. The default value is UTF-8. For a list of some of the encoding options and the languages that they are associated with,

Option	Description
	see Appendix 3, “Text Encoding Options and Language Mappings,” on page 197.
Display hidden folders and items on the file system	Displays hidden files and folders in the Explorer section of the navigation pane.
Display labels on application navigation pane	Displays labels in addition to the icons on the navigation pane.
Enable document recovery	<p>Enables you to recover the most recently saved version of your open files, such as SAS programs, flows, queries, and tasks, if SAS Studio times out while you are away or closes unexpectedly due to a situation such as a power loss. If you select this option, you can use the Document Recovery window to choose the files that you want to recover. For more information, see “Using the Document Recovery Window” on page 28.</p> <p>This option is selected by default. You can use the Document save interval option to specify how often you want to save your files. The default interval is 30 seconds.</p>
Automatically refresh libraries after each submission	<p>Refreshes the Libraries section of the navigation pane after you run a program, task, or query so that any changes to the libraries are displayed immediately. However, selecting this option can cause you to lose your place in the list of libraries and affect performance. This option is selected by default.</p> <p>Note: If you do not select this option and you run code that creates a new file or library, you must click  > Refresh to display the changes. To refresh an individual table or library, right-click the table or library and select Refresh. If you create a new file or library using the SAS Studio user interface, those changes are displayed automatically even if this option is not selected.</p>
Automatically refresh files and folders after each submission	<p>Refreshes the Explorer section of the navigation pane after you run a program, task, or query so that any changes to the files and folders are displayed immediately. However, selecting this option can cause you to lose your place in the list of files and folders and affect performance. This option is selected by default.</p> <p>Note: If you do not select this option and you run code that creates a new file or folder, you must click  > Refresh to display the changes. To refresh an individual folder, right-click the folder and select Refresh. If you create a new file or folder using the SAS Studio user interface, those changes are displayed automatically even if this option is not selected.</p>

Option	Description
Show suggested commands	Displays the possible command options when you type in the command line.

Setting the Code and Log Preferences

From the **SAS Programs** ⇒ **Code and Log** page, you can specify these options for the code and log tabs.

Option	Description
Show custom code in the SAS log	Includes custom code in the log file.
Use enhanced log viewer	<p>Automatically generates the log each time the program is run. This option is selected by default. If you do not select this option, the log is loaded only when the Log tab is active. Using the enhanced log viewer can affect your performance. You can choose from these options when you use the enhanced log viewer:</p> <ul style="list-style-type: none"> ■ Generate errors, warnings and notes summary creates a section at the top of the log that provides easy access to all of the errors, warnings, and notes in the log. When you click a message, SAS Studio highlights it for you in the log so that you can see exactly where the message occurs in the log. ■ Display error and warning icons in the Code tab gutter displays error and warning icons in the gutter of the Code tab. When you click an icon, SAS Studio highlights the message in the log. Icons are displayed in the gutter only when you run the entire program and when Automatically clear log is selected. Icons cannot be displayed if Append log is selected. ■ Show only errors and warnings in the SAS log displays only error and warning messages in the log. Informational notes are not displayed.
Stream log updates while a procedure is running	Displays log updates as a procedure is processed. If you do not select this option, the log is displayed when the procedure has finished running. This option is selected by default and might have a slight effect on performance. This option is available only if you are running the Standard perspective.
Display warning if log is larger than specified size	Displays a warning when the number of lines in the log exceeds the number that is specified in the Maximum size

Option	Description
	number of log lines option. The value can range from 100 to 10,000.
Automatically clear log	Clears the log each time you run code. This option is selected by default. If you do not select this option, then a Clear log button is available in the Program Editor. This option is available only if you are running the Standard perspective.
Append log	Appends new log information to the existing log. You can choose to append the logs for programs, tasks, or both programs and tasks. This option is available only if you are running the Standard perspective.
Program tab layout	Specifies the arrangement of the Log , Results , Output data , and Listing tabs in the work area.
Display tabs in the Preview section	Specifies which tabs to include in the preview section of the program tab after you run code. Note: This option is applied only to programs that you open after you have selected the option.

Setting the Results Preferences

From the **Results** page, you can specify these options.

Option	Description
Display warning if results are larger than specific size	Displays a warning message when you attempt to open a results file that is larger than the size that is specified in the Maximum size option. You can enter a value between 0.5 and 10 MB. The default value is 3 MB.
Generate table of contents	Creates a table of contents for the HTML output.
Produce HTML output	Generates results in HTML format. This is the default results format. If you clear this option, then the Results tab is not displayed when you run a program.
Specify an HTML output style	Enables you to specify the style that is applied to results in HTML. If this option is not selected, SAS Studio uses the style that is associated with the application theme. If this option is selected, you can use the Output style drop-down list to select the style that is applied to the results.

Option	Description
Generate HTML graphs as SVG	Creates SVG graphs instead of PNG graphs in HTML output. SVG graphs maintain clarity when you zoom in and out.
Enable accessible graph option	Adds accessibility metadata to graphs that are created by ODS Graphics. Users with disabilities access the accessibility metadata using SAS Graphics Accelerator. This option is available only if you are running SAS 9.4M4 or later. For more information, see the ODS HTML5 Statement in <i>SAS Output Delivery System: User's Guide</i> .
Produce PDF output	Generates results in PDF format. This option is not selected by default and is available only if you are running the Standard perspective.
Output style	Displays the style that is applied to results in PDF. To change the style that is applied to the results, select another style from the drop-down list. This option is available only if you are running the Standard perspective.
Generate table of contents	Creates a table of contents in the PDF file. This option is available only if you are running the Standard perspective.
Enable accessible PDF option	Adds accessibility metadata to the PDF file that enables the file to be accessed by assistive technology such as a screen reader. When metadata is added, the file is often called a "tagged PDF" and follows the PDF/Universal Accessibility (PDF/UA) format.
Produce WORD output	Generates results in Microsoft Word format. This option is available only if you are running the Standard perspective.
Output style	Displays the style that is applied to results in Word format. To change the style that is applied to the results, select another style from the drop-down list. This option is available only if you are running the Standard perspective.
Produce RTF output	Generates results in RTF format. This option is not selected by default and is available only if you are running the Standard perspective. Note: Microsoft has discontinued enhancements to the RTF specification. It is recommended that you use the Produce WORD output option to generate your output. Using the Produce WORD output option also ensures that your output is accessible.
Output style	Displays the style that is applied to results in RTF. To change the style that is applied to the results, select another style from the drop-down list. This option is available only if you are running the Standard perspective.

Option	Description
Produce EXCEL output	Generates results in Microsoft Excel format. This option is available only if you are running the Standard perspective.
Output style	Displays the style that is applied to results in Excel format. To change the style that is applied to the results, select another style from the drop-down list. This option is available only if you are running the Standard perspective.
Produce PPT output	Generates results in Microsoft PowerPoint format. This option is available only if you are running the Standard perspective.
Output style	Displays the style that is applied to results in PowerPoint format. To change the style that is applied to the results, select another style from the drop-down list. This option is available only if you are running the Standard perspective.

Note: If you want to use a custom style, you must customize the SAS Studio output environment. For more information, see [Appendix 4, “Customized Output Environment,”](#) on page 199.

Setting Editors Preferences

From the **Editors** page, you can set the options for the SAS and XML language editors.

Option	Description
Enable snippet abbreviations	Enables you to insert snippets into a program by entering <i>@snippet-name</i> or entering @ and using the pop-up window to select from a list of snippets in your My Snippets folder. This option is selected by default. For more information, see “Create a Snippet” on page 76.
Editor Options	Enables you to specify editing and display options as well as appearance options for the code editor. For more information, see “Setting General Code Editor Preferences” on page 189 and “Setting Appearance Options in the Code Editor” on page 190.
Enable syntax highlighting	Displays the text in the code editor in different colors to help you identify different elements in the syntax. This option is selected by default.

Option	Description
Enable hint when you hover over keywords	Displays the syntax help window when you position the mouse pointer over a valid SAS keyword in your program. If this option is not selected, then you can view the syntax help by right-clicking a keyword and selecting Syntax help . This option is not selected by default.

Setting General Code Editor Preferences

From the **Editors** page, click **Editor Options**, and then click **Behavior and Appearance** to set editing and display options for the code editor.

Option	Description
Show autocomplete list	Turns on the autocomplete feature of the code editor. This feature can predict the next keyword that you want to type before you actually type it completely. For more information, see “Using the Autocomplete Feature” on page 43 .
Auto-indent	Automatically indents a new line by the amount of space that the previous line is indented.
Auto-insert block comments	Automatically inserts the closing comment tag when you enter <code>/*</code> and press Enter so that you can insert comments that span multiple lines.
Use overwrite mode	Replaces existing characters with new characters when you type in the code editor.
Auto-pair quotation marks	Automatically inserts a closing quotation mark when you type a quotation mark and positions the cursor in between them.
Highlight matching brackets	Highlights the matching bracket when you position the cursor on a bracket.
Auto-pair brackets	Automatically inserts a closing bracket when you type a left bracket and positions the cursor in between them.
Enable code folding	Enables you to collapse and expand regions of code in the code editor.
Enable line highlighting	Automatically highlights the line of code that you specify when you use the Go to line feature.

Option	Description
Show indent guides	Displays vertical lines that indicate where an indented section of code begins and ends.
Show line-length guide	Displays a vertical line in the Program Editor at the column position that you specify. The default column position is 80.
Show invisible characters	Displays characters such as spaces and carriage returns in the Program Editor.
Show line numbers	Displays line numbers in the leftmost column of the program tab.
Print line numbers	Includes line numbers in the leftmost column when you print a program.
Wrap text	Displays text that continues past the right edge of the page on the next line.
Tab width	Specifies the number of spaces that are inserted into your text when you insert a tab character. The default value is four spaces for each tab character.
Substitute spaces for tabs	Inserts the number of spaces specified in the Tab width option instead of a single tab character.


Setting Appearance Options in the Code Editor

You can set appearance options for SAS, Python, and XML code in the code editor. From the **Editors** page, click **Editor Options**, and then click **Colors and Fonts for SAS**, **Colors and Fonts for Python**, or **Colors and Fonts for XML**.

Option	Description
Syntax theme	Specifies whether to use a light or dark background in the code editor.
Font	Specifies the font that is used in the code editor.
Editor background	Specifies the background color that is used in the code editor.
Enable syntax highlighting	Enables you to specify the text style and background color of specific file elements in the code editor.

Setting Tables Preferences

From the **Tables** page, you can set the options for the table viewer.

Option	Description
Restrict number of tables displayed when expanding libraries	Limits the number of tables that are displayed when you expand a library in the Libraries section of the navigation pane. Use the Tables displayed box to specify the maximum number of tables to display. You can view any additional tables that are not displayed by clicking More at the end of the list of tables. Any changes that you make to this option take effect when you refresh the Libraries tree or restart SAS Studio.
Column headers	Specifies whether column name or labels are displayed in the table viewer. Column names are displayed by default.
Rows per page	Specifies the number of rows to display per page of data. The default value is 200. Note: You can override this option for an open table in the table viewer by clicking  on the table viewer toolbar and selecting Row paging .
Columns displayed	Specifies the maximum number of columns to display in the table viewer. The default value is 100. Increasing the number of columns that are displayed might affect your performance.
SAS variable name policy	Enables you to specify one of the following sets of rules to apply to SAS variable names. <ul style="list-style-type: none"> ■ ANY specifies that the variable names can begin with or contain any characters, including blanks, must contain at least one character, and cannot contain any null bytes. Variable names can contain mixed-case letters as well as special and multi-byte characters. Names can be up to 32 bytes in length. This option is selected by default. Leading blanks are preserved, but trailing blanks are ignored. ■ V7 specifies that the variable names must begin with a letter of the Latin alphabet (A-Z, a-z) or the underscore character. They cannot contain blanks or special characters except for the underscore and cannot be assigned the names of special SAS automatic variables or variable list names. Variable names can contain mixed-case letters and can be up to 32 bytes in length.

Option	Description
	<ul style="list-style-type: none"> ■ UPCASE specifies that the variable name follows the same rules as V7, except that the variable name is uppercase, as in earlier versions of SAS.
SAS member name policy	<p>Enables you to specify one of the following sets of rules to apply to SAS data set names, SAS data view names, and item store names. Any changes you make to this option take effect when you start SAS Studio or reset your SAS session.</p> <ul style="list-style-type: none"> ■ EXTEND (Extended member names) specifies that names must contain at least one character (letters, numbers, valid special characters, and national characters), cannot begin with a blank or a period, and cannot include a null byte. Names can contain mixed-case letters and can be up to 32 bytes in length. Leading blanks are preserved, but trailing blanks are ignored. Special characters cannot include the / \ * ? " < > : - characters. This option is selected by default. ■ COMPATIBLE (Basic member names) specifies that the names must begin with a letter of the Latin alphabet (A–Z, a–z) or the underscore character and cannot contain blanks or special characters except for the underscore. Names can contain mixed-case letters and can be up to 32 characters in length.

Setting Task Preferences

From the **Tasks** page, you can set the options for the generated SAS code and the task layout in the SAS Studio workspace. These options are available only if you are running the Standard perspective.

Option	Description
Generate header comments for task code	Adds comments before the generated code for a SAS task.
Automatically format generated code	Automatically formats any code that is generated by a task.
Show Preview section	Specifies whether to display the preview section of the task tab after you run a task and which tabs to include in the preview.

Setting Flow Preferences

From the **Flows** page, you can set the options for flows. These options are available only if you are running the Standard perspective.

Preview tab layout	Specifies how the preview tabs are displayed in relation to the flow canvas. By default, the preview tabs are displayed horizontally, or below the flow canvas.
--------------------	---

Setting Background Submit Preferences

From the **Background Submit** page, you can set the options for background submissions. These options are available only if you are running the Standard perspective.

Location of log and output files	<p>Specifies where to save the output and log files. You can choose from these options:</p> <ul style="list-style-type: none"> ■ Use same name and location as file uses the name and location of the program file for the log and output files. ■ Prompt for output and log file names prompts you to specify a location in which to save the log and output files. ■ Specify names and location enables you to specify a name and location for the log and output files.
---	--

Log or output files exist	<p>Specifies how to handle the background submission if a log and output file already exist. You can choose from these options:</p> <ul style="list-style-type: none"> ■ Replace existing files automatically replaces existing log and output files of the same name. ■ Cancel the submission cancels the background submission when there are existing log and output files of the same name. ■ Automatically add a timestamp saves all log and output files by creating a unique file name for each file. The log and output files are saved as <code>program-name (YYYY-MM-DD HH:MM:SS)</code>. ■ Prompt displays a message window to confirm that you want to replace or specify a new location for the existing log and output files before submitting the background submission. If you select <code>cancel</code>, the background submission is canceled.
----------------------------------	---

Setting Query Preferences

From the **Query** page, you can set the options for queries. These options are available only if you are running the Standard perspective.

Generate code using	Specifies whether to use PROC SQL or PROC FEDSQL to generate the query code. The default value is PROC SQL. For more information, see “Generating a FedSQL Query” on page 110 .
Columns to display on Select tab for PROC SQL	Specifies the columns that are displayed on the Select tab in addition to the table and column name. This option applies only to queries that are using PROC SQL to generate the query code.
Show Preview section	Specifies whether to display the preview section of the query tab after you run a query and which tabs to include in the preview.

Setting Import Preferences

From the **Import** page, you can set the options for importing data. These options are available only if you are running the Standard perspective.

Show Preview section	Specifies whether to display the preview section of the import tab after you import data and which tabs to include in the preview.
-----------------------------	--

Appendix 2

Using the Expression Builder

Building an Expression 195

Building an Expression

You can use the Expression Builder when you are creating a filter on your data or when you are creating a filter, join, or calculated column in a query.

Note: The following features are not available in the Expression Builder if you are creating your expression for a node in a flow:

- Values and Log area in the Expression Builder window
- **Get Values** button that enables you to choose from a list of values and search for a specific value
- **Validate** button to validate the syntax of your expression

The Expression Builder window contains three main areas:

Data and Functions area	provides access to the columns in your data and the functions that you can use.
expression area	displays the expression as you build it. You can also type an expression in this area.
Values and Log area	the Values tab displays distinct values for columns. The Log tab displays the validation log. If you are using the Expression Builder to create a calculated column, this area also includes a Properties tab.

Note: The Values and Log area is not available if you are creating an expression for a node in a flow.

You can add columns and functions to the expression by double-clicking the name. You can also add column names by right-clicking the column and selecting **Add to expression** or by dragging the column to the expression box.

To populate a list of distinct values for the column, select the column on the Data tab, and then click **Get Values** on the Values tab. You can add values to the expression by double-clicking the value, clicking **Add to Expression** on the toolbar, or dragging the value to the expression box.

Note: You can also type the expression directly in the expression box located above the table viewer.

Note: The option to choose from a list of values and search for a specific value is not available if you are creating the expression for a node in a flow.

To validate the syntax of your expression, click **Validate**. The Log tab displays any errors in your expression syntax.

Note: The option to validate your syntax is not available in the following situations:

- You are using the Interactive perspective. For more information, see [“Understanding Perspectives” on page 31](#).
- You are creating an expression for a node in a flow.

Note: The = operator does not give expected results with decimal values. To create a filter with decimal values, use the Between operator.

The screenshot shows the 'Filter Table Rows' dialog box. On the left, the 'Data' tab is active, displaying a tree view of columns under 'BASEBALL'. The 'nRBI' column is selected. The main area shows the expression 'nRBI > 35' in the expression box. Below the expression box, the 'Values' tab is active, showing a list of values from 33 to 41. The value '35' is selected. The 'Filter value...' field is set to 'Equal' and 'Value'. There are 'Save' and 'Cancel' buttons at the top right, and a 'Validate' button at the top right of the expression box.

Appendix 3

Text Encoding Options and Language Mappings

<i>About the Text Encoding to Language Mappings</i>	197
<i>Text Encoding Options and Language Mappings</i>	197

About the Text Encoding to Language Mappings

The following table lists some of the text encoding options and the languages they are associated with. For more information, see [“Setting General Preferences”](#) on page 183.

Text Encoding Options and Language Mappings

Text Encoding Option	Language
Windows-1250	(Central European languages): Polish, Czech, Slovak, Hungarian, Slovenian, Serbian Latin, Croatian, Bosnian, Romanian, Albanian

Text Encoding Option	Language
Windows-1251	(Cyrillic languages): Russian, Byelorussian, Bulgarian, Serbian Cyrillic, Macedonian, Ukrainian
Windows-1252	(Western European languages): Afrikaans, Basque, Catalan, Valencian, Welsh, Danish, German, English, Spanish, Basque, Finnish, Faroese, French, Western Frisian, Irish, Galician, Indonesian, Icelandic, Italian, Inuktitut, Luxembourgish, Malay, Norwegian Bokmål, Dutch, Norwegian Nynorsk, Portuguese, Quechua, Romansh, Northern Sami, Swedish, Swahili, Tswana, Xhosa, Zulu
Windows-1253	Greek
Windows-1254	Turkish
Windows-1255	Hebrew
Windows-1256	Arabic
Windows-1257	(Baltic languages): Estonian, Latvian, Lithuanian
Windows-1258	Vietnamese

Appendix 4

Customized Output Environment

<i>Overview</i>	199
<i>Generate Output for Other Output Destinations</i>	200
<i>Send Your Results to Another Location</i>	201
<i>Use a Custom Style for Your Output</i>	201
<i>Use an Image Format Other Than the Default</i>	201
<i>Create a Drill-down Graph</i>	202
<i>Create an Animated GIF or SVG Image</i>	202

Overview

You must customize the SAS Studio output environment to perform any of these tasks:

- [generate output for other output destinations](#)
- [send your results to another location](#)
- [use a custom style for your output](#)
- [use an image format other than the default](#)
- [create a drill-down graph](#)
- [create an animated GIF or SVG image](#)

To customize the SAS Studio output environment, first disable the default output environment in order to conserve system resources. Next, establish your own output environment, and then execute the SAS statements that are required to generate your output. Use ODS statements, ODS procedures, or ODS options in your SAS program to define the environment that you need.

As a best practice, if your SAS program requires a customized output environment in SAS Studio, your program should always perform these steps:

- 1 Create a file reference for your ODS output. You can use the `&_SASWS_` macro variable that is defined in SAS Studio to reference your home directory as shown in the following statement:

```
filename odsout "&_SASWS_/charts";
```

If you want to store your image files in a separate directory, create a second file reference for your image files as shown in the following statement:

```
filename ods1out "&_SASWS_/charts/images";
```

Note: The directories that you specify must already exist, and you must have Write access to the directories.

- 2 To conserve system resources, disable the default output environment by using the following statement:

```
ods _all_ close;
```

- 3 Open the desired ODS destination. Use the `PATH=` option to specify the file reference that you created for your ODS output. If you created a separate file reference for your image files, use the `GPATH=` option to specify the image output file reference. Here is an example:

```
ods html path=odsout gpath=ods1out file="saleschart.html";
```

- 4 Execute the SAS statements that are required to generate your output.
- 5 Close your ODS destination.

When you disable the default SAS Studio output environment, results are no longer displayed on the **Results** tab for the duration of your program. The results are generated only by the ODS destination that you open.

Generate Output for Other Output Destinations

If you need to generate output other than the default HTML5, PDF, or RTF output, you must open your own ODS destination. Examples of output destinations include HTML, PowerPoint, and LISTING. After you disable the default output environment, use an ODS statement to open your own output destination. Here is an example:

```
filename odsout "&_SASWS_/charts";
ods _all_ close;
ods powerpoint path=odsout file="filename";
```

To access the dictionary of ODS statements, see *SAS Output Delivery System: User's Guide*.

Send Your Results to Another Location

When you execute a program in SAS Studio, you can download the output from the **Results** tab to your local machine. If you want to send your output directly to another location, you must open your own ODS destination. By default, output files that are generated by the ODS destinations that you open are written to your home directory.

If you want to send the results to a specific location, use a FILENAME statement to define a file reference to the desired location. You can use the `&_SASWS_` macro variable to reference your home directory. After you create the file reference, use the `PATH=file-reference` option in your ODS statement. Here is an example:

```
filename odsout "&_SASWS_/charts";
ods _all_ close;
ods html path=odsout file="sales.htm";
```

In this case, file `sales.htm` and any image files that are generated are written to subdirectory `charts` in your home directory.

Use a Custom Style for Your Output

When you need to use a custom ODS style such as a corporate style for your results in SAS Studio, you must open your own ODS destination. You cannot specify a custom style for the default results. Use the `STYLE=` option in your ODS statement to specify your custom style. Here is an example:

```
filename odsout "&_SASWS_/charts";
ods _all_ close;
ods html path=odsout file="filename.htm" style=style-name;
```

To create a custom style, use the ODS TEMPLATE procedure, CSSStyles, or the `STYLE=` option. For more information, see *SAS Output Delivery System: User's Guide*.

Use an Image Format Other Than the Default

When you need to use an image format other than the default, you must specify the desired output format, and then open your own ODS destination. To specify the image format:

- If you are using SAS/GRAPH to create your graphs, specify the DEVICE= option in an OPTIONS or GOPTIONS statement. For more information, see *SAS/GRAPH: Reference*.

Note: The ACTIVEX and JAVA graphics output devices are not recommended in SAS Studio 5.2 or later. Your graphs might not work as expected if you use these output devices.

- If you are using ODS Graphics to create your graphs, specify the OUTPUTFMT= option in an ODS GRAPHICS statement. For more information, see *SAS Output Delivery System: User's Guide*.

Create a Drill-down Graph

When you need to create a drill-down graph in SAS Studio, you must open your own ODS destination. Drill-down graphs provide a convenient means for users to explore complex data. In a drill-down graph, certain elements of the graph contain active links. When a user clicks a linked element, the linked resource appears in a new browser window by default.

For more information, see the following documents:

- If you are using SAS/GRAPH to create the graph, see *SAS/GRAPH: Reference*.
- If you are using the Graph Template Language to create the graph, see *SAS Graph Template Language: User's Guide*.

Create an Animated GIF or SVG Image

When you need to create an animated graph in SAS Studio, you must open your own ODS destination. An animated graph displays a series of charts automatically when the graph is viewed in a web browser or other viewer that supports animation. The animation plays as a sequence of graphs in a slide-show fashion with a delay between each graph. The sequence can play only one time, loop a fixed number of times and then stop, or loop indefinitely.

For more information, see the following documents:

- If you are using SAS/GRAPH to create the graph, see *SAS/GRAPH: Reference*.
- If you are using the Graph Template Language to create the graph, see *SAS Graph Template Language: User's Guide*.

Appendix 5

SAS Studio Command Line

<i>About the Command Line Interface</i>	203
<i>Commands in Standard Perspective</i>	204
<i>Commands in Interactive Perspective</i>	210
<i>Specifying the Path to the Content: SAS Content or SAS Compute</i>	213

About the Command Line Interface

You can use the command line interface to access SAS Studio using the keyboard to control the application. To open the command line, select **View** ⇒ **Command** or press Alt+M in Windows environments and Option+M in MacOS environments.


A command can have options and arguments. Options have a dash at the beginning. Arguments that contain white space characters must be enclosed in quotes. Arguments for a command must be in a specified order, but options can be mixed into the argument list in any order.

Enter the command you want to run in the command line. When you are entering text in the command line, SAS Studio suggests possible commands. To select a command from the list of suggestions, use the up and down arrow keys and press Enter. To run the command, press Enter again. To run multiple commands, enter the commands separated by semicolons.

Note: The availability of a command depends where you are in the user interface. For example, only a subset of commands are available when working with flows.

Commands are executed in order and the next command starts when the previous one completes. If a command does not complete and processing halts, use Ctrl +Shift+X to clear the command queue.

When a command runs, information is added to the SAS Studio console. If the command fails, an error message appears in the console. To open the console, select **View** ⇒ **Console** or press Alt+C.

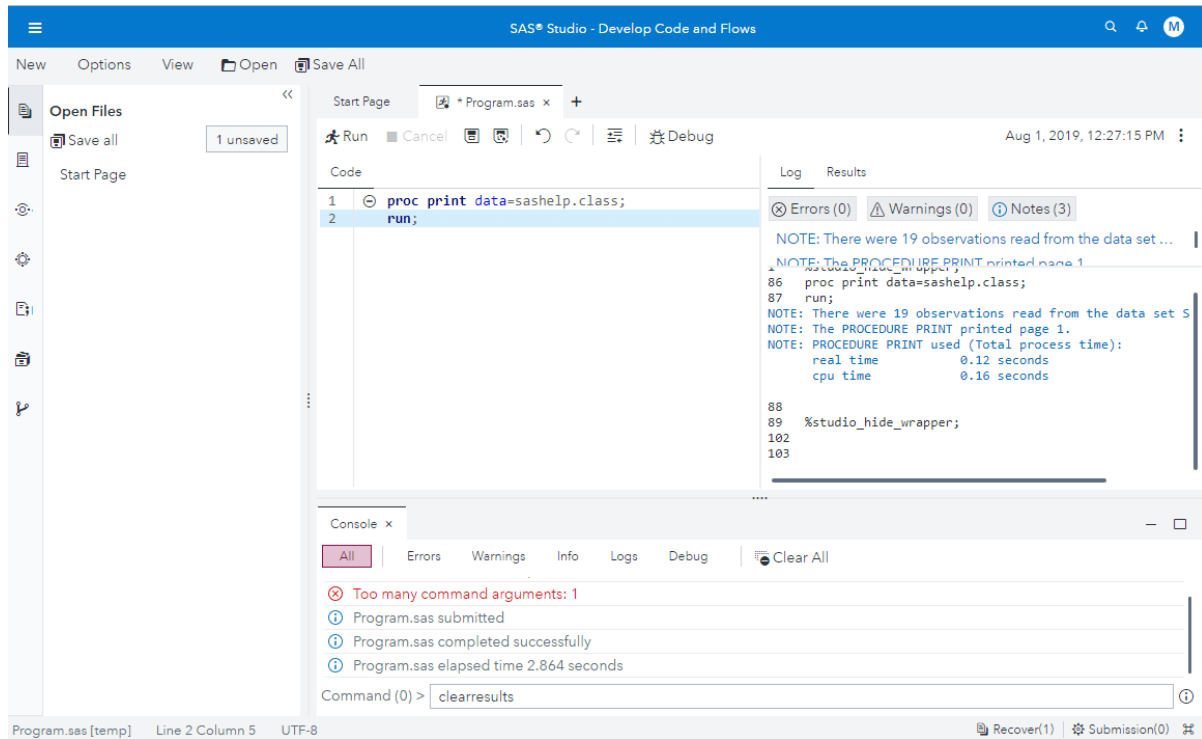

To view previous commands, press Ctrl+Arrow Up to go up one step in the command history. Press Ctrl+Arrow Down to go down one step in the command history.

To abort the execution of a list of commands:

- In Windows environments, press Ctrl+Shift+X.
- In OS X environments, press Command+Shift+X.

Commands in Standard Perspective

These commands are available in the standard perspective.

Table A5.1 Commands in Standard Perspective

Command Name	Description
BGSUBMIT	Starts a background submission and runs the code currently selected in the code editor. If no code is selected, all the code is run.
CANCEL	Stops running the current submission.
CLEAR	Deletes the content in the Log and Results tabs.
CLEARCODE	Deletes all code from the Code tab.

Command Name	Description
CLEARHISTORY	Deletes submission history.
CLEARLOG	Deletes the content in the Log tab.
CLEARRESULTS	Deletes the content in the Results tab.
CLOSE	Closes the selected tab. Note: This command is available when working with flows.
CLOSEALL	Closes all tabs. Note: This command is available when working with flows.
CONSOLE	Opens the console for SAS Studio. Note: This command is available when working with flows.
DEBUG	Starts the DATA Step debugger. Note: The cursor must in the DATA step code for this command to work.
EXPORTTABLE <i><path-to-output-folder></i> <i><filename.ext></i> <i><-csv -dml -tab></i> <i><-force></i>	Opens the Export Table window, when the data view is open and if output path is specified. If you specify the output path and filename of the table view, the Export Window does not open. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213 . These options are available: <ul style="list-style-type: none"> ■ <code>-csv -dml -tab</code> specifies the export type for the file. If this option is not specified, the export type is determined from the extension on the filename. ■ <code>-force</code> overwrites an existing file with the same name.
FIND <i>target-string</i> <i><-case -c></i> <i><-up -u></i> <i><-word -w></i>	Searches for the specified target string in the code. These options are available. <ul style="list-style-type: none"> ■ <code>-case -c</code> specifies that the search is case sensitive. By default, the case is ignored. ■ <code>-up -u</code> searches up. By default, the search goes down the file. ■ <code>-word -w</code> searches for whole word matches. By default, the search does not check for word boundaries. Note: Use the NEXT command to move to the next instance of the target string. Use the PREV commands to move to the previous instance of the target string.

Command Name	Description
GOTOLINE <line-number>	Moves the cursor to the specified line number. If you do not specify a line number, SAS Studio prompts you for this information.
KEYS <-edit>	<p>Opens the Keyboard Shortcuts window. If you specify the <code>edit</code> option, the Manage Keyboard Shortcuts window opens enabling you to edit an existing shortcut. From this window, you can also import and export shortcuts and reset all shortcuts.</p> <p>Note: This command is available when working with flows.</p>
NEWFLOW	<p>Opens a new flow.</p> <p>Note: This command is available when working with flows.</p>
NEWIMPORT	<p>Opens an import data window on a new tab in the work area.</p> <p>Note: This command is available when working with flows.</p>
NEWPROGRAM	<p>Adds a new Program tab to the work area.</p> <p>Note: This command is available when working with flows.</p>
NEWQUERY	<p>Opens a query window on a new tab in the work area.</p> <p>Note: This command is available when working with flows.</p>
NEWTASKTEMPLATE	<p>Opens a blank task template on a new tab in the work area.</p> <p>Note: This command is available when working with flows.</p>
NEXT	Finds the next occurrence of the pattern specified in the FIND command.
OPENENCODED <path-to-file/ filename.ext> <- encoding>	<p>Opens the Open File window, if no options are specified. This window does not open if you specify a filename. To open a specific file, specify the path and filename. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>Use the <code>-encoding</code> option to specify the encoding of the file (for example, <code>-UTF8</code>).</p> <p>Note: This command is available when working with flows.</p>

Command Name	Description
OPENFILE <path-to-file/filename.ext>	<p>Opens the Open File window, if no filename is specified. This window does not open if you specify a filename. To open a specific file, enter the path and filename. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>Note: This command is available when working with flows.</p>
PREFERENCES	<p>Opens the Preferences window.</p> <p>Note: This command is available when working with flows.</p>
PREV	<p>Finds the previous occurrence of the pattern specified in the FIND command.</p>
REPLACE <i>target-string replacement-string</i> <-case -c> <-up -u> <-word -w> <-all -a>	<p>Searches for the specified target string in the code and replaces it with the specified content. These arguments are available.</p> <ul style="list-style-type: none"> ■ -case -c specifies that the search is case sensitive. By default, the case is ignored. ■ -up -u searches up. By default, the search goes down the file. ■ -word -w searches for whole word matches. By default, the search does not check for word boundaries. ■ -all -a replaces all occurrence of the target string.
RESET	<p>Resets the SAS Studio session.</p> <p>Note: This command is available when working with flows.</p>
SAVE <output-path> <filename.ext> <-force> <-encoding>	<p>Opens the Save As window, if no output path is specified. This window does not open if you specify an output path. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the file keeps its original filename. To change the filename, you must specify the <code>filename.ext</code> argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ -force overwrites an existing file with the same name. ■ -encoding specifies the encoding of the file, such as -UTF8.
SAVEALL	<p>Saves all open files.</p>

Command Name	Description
SAVECODE <output-path> <filename.ext> <-force> <-encoding>	<p>Opens the Save As window, if no output path is specified. This window does not open if you specify an output path. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the original filename is used. To change the filename, you must specify the <code>filename.ext</code> argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ <code>-force</code> overwrites an existing file with the same name. ■ <code>-encoding</code> specifies the encoding of the file, such as <code>UTF8</code>.
SAVELOG <output-path> <filename.ext> <-force> <-encoding>	<p>Opens the Save As window, if no output path is specified. This window does not open if you specify an output path. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the original filename is used. To change the filename, you must specify the <code>filename.ext</code> argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ <code>-force</code> overwrites an existing file with the same name. ■ <code>-encoding</code> specifies the encoding of the file, such as <code>UTF8</code>.
SAVEPACKAGE <output-path> <filename.ext> <-force> <-encoding>	<p>Opens the Save As window, if no output path is specified. This window does not open if you specify an output path. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the original filename is used. To change the filename, you must specify the <code>filename.ext</code> argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ <code>-force</code> overwrites an existing file with the same name. ■ <code>-encoding</code> specifies the encoding of the file, such as <code>UTF8</code>.
SAVERESULTS <output-path> <filename.ext> <-force> <-encoding>	<p>Opens the Save As window, if no output path is specified. This window does not open if you specify an output path. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the original filename is used. To change the filename, you must specify the <code>filename.ext</code> argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ <code>-force</code> overwrites an existing file with the same name.

Command Name	Description
	<ul style="list-style-type: none"> ■ <code>-encoding</code> specifies the encoding of the file, such as <code>UTF8</code>.
SAVESUMMARY <code><output-path></code> <code><filename.ext> <-force></code> <code><-encoding></code>	<p>Opens the Save As window, if no output path is specified. This window does not open if you specify an output path. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the file keeps its original filename. To change the filename, you must specify the <code>filename.ext</code> argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ <code>-force</code> overwrites an existing file with the same name. ■ <code>-encoding</code> specifies the encoding of the file, such as <code>UTF8</code>.
SEARCH <code><-max -restore -off></code>	<p>Displays the Search tab. These options are available:</p> <ul style="list-style-type: none"> ■ <code>-max</code> maximizes the preview area. ■ <code>-restore</code> restores the preview area. ■ <code>-off</code> closes the Search tab. <p>Note: This command is available when working with flows.</p>
SELECTCODE	Selects the Code tab.
SELECTLOG	Selects the Log tab.
SELECTOUTPUT	Selects the Output tab.
SELECTRESULTS	Selects the Results tab.
SUBMISSIONS <code><-max -restore -off></code>	<p>Displays the Submissions tab. These options are available:</p> <ul style="list-style-type: none"> ■ <code>-max</code> maximizes the preview area. ■ <code>-restore</code> restores the preview area. ■ <code>-off</code> closes the Submissions tab. <p>Note: This command is available when working with flows.</p>
SUBMIT	Runs the currently selected code or all the code in the editor if no code is selected.
VIEWTABLE <code><library.table> <-last></code>	<p>Opens the Select Table window if no filename is specified. Use the <code>library.table</code> argument to specify the table to view. The Select Table window does not open.</p> <p>If no table is specified, use the <code>-last</code> option to open the last table that was generated in the current session.</p>

Command Name	Description
	Note: This command is available when working with flows.
ZOOM <-max> <-restore>	<p>Specifies the size of the tab area. These arguments are available.</p> <ul style="list-style-type: none"> ■ -max specifies to maximize the size of the tab area. ■ -restore returns the tab area to the default size. <p>Note: This command is available when working with flows.</p>

Commands in Interactive Perspective

These commands are available in the interactive perspective.

Table A5.2 Commands in Interactive Perspective

Command Name	Description
CANCEL	Stops running the current submission.
CLEAR	Deletes the content in the Log and Results tabs.
CLEARCODE	Deletes all code from the Code tab..
CLEARLOG	Deletes the content in the log.
CLEARRESULTS	Deletes the content in the Results tab.
CLOSE	Closes the selected tab.
CLOSEALL	Closes all tabs.
CONSOLE	Opens the console for the command line.
FIND <i>target-string</i> <-case -c> <-up -u> <-word -w>	<p>Searches for the specified target string in the code. These options are available.</p> <ul style="list-style-type: none"> ■ -case -c specifies that the search is case sensitive. By default, the case is ignored. ■ -up -u searches up. By default, the search goes down the file.

Command Name	Description
	<ul style="list-style-type: none"> ■ <code>-word -w</code> searches for whole word matches. By default, the search does not check for word boundaries.
GOTOLINE <i><line-number></i>	Moves the cursor to the specified line number. If you do not specify a line number, SAS Studio prompts you for this information.
KEYS <i><-edit></i>	Opens the Keyboard Shortcuts window. If you specify the <code>edit</code> option, the Manage Keyboard Shortcuts window opens enabling you to edit an existing shortcut. From this window, you can also import and export shortcuts and reset all shortcuts.
NEWPROGRAM	Adds a new Program tab to the work area.
NEXT	Finds the next occurrence of the pattern specified in the FIND command.
OPENENCODED <i><path-to-file/filename.ext></i> <i><-encoding></i>	<p>Opens the Open File window, if no options are specified. This window does not open if you specify a filename. To open a specific file, specify the path and filename. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>Use the <code>-encoding</code> option to specify the encoding of the file (for example, <code>-UTF8</code>).</p>
OPENFILE <i><path-to-file/filename.ext></i>	<p>Opens the Open File window, if no filename is specified. This window does not open if you specify a filename. To open a specific file, enter the path and filename. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p>
PREFERENCES	Opens the Preferences window.
PREV	Finds the previous occurrence of the pattern specified in the FIND command.
REPLACE <i>target-string</i> <i>replacement-string</i> <i><-case -c></i> <i><-up -u></i> <i><-word -w></i> <i><-all -a></i>	<p>Searches for the specified target string in the code and replaces it with the specified content. These arguments are available.</p> <ul style="list-style-type: none"> ■ <code>-case -c</code> specifies that the search is case sensitive. By default, the case is ignored. ■ <code>-up -u</code> searches up. By default, the search goes down the file. ■ <code>-word -w</code> searches for whole word matches. By default, the search does not check for word boundaries. ■ <code>-all -a</code> replaces all occurrence of the target string.

Command Name	Description
RESET	Resets the SAS Studio session.
SAVE <path-to-parent-folder> <filename.ext> <-force> <-encoding>	<p>Opens the Save As window, if no options are specified.. This window does not open if you specify a filename. To save a specific file, enter the folder name. For more information, see “Specifying the Path to the Content: SAS Content or SAS Compute” on page 213.</p> <p>If no filename is specified, the file keeps its original filename. To change the filename, you must specify the filename.ext argument.</p> <p>You can also specify these options:</p> <ul style="list-style-type: none"> ■ -force overwrites an existing file with the same name. ■ -encoding specifies the encoding of the file, such as -UTF8.
SAVEALL	Saves all open files.
SEARCH <-max -restore -off>	<p>Displays the Search tab. These options are available:</p> <ul style="list-style-type: none"> ■ -max maximizes the preview area. ■ -restore restores the preview area. ■ -off closes the Search tab.
SHOWLOG <-max -restore -off>	<p>Displays the Log tab. These options are available:</p> <ul style="list-style-type: none"> ■ -max maximizes the preview area. ■ -restore restores the preview area. ■ -off closes the Log tab.
SHOWRESULTS <-max -restore -off>	<p>Displays the Results tab. These options are available:</p> <ul style="list-style-type: none"> ■ -max maximizes the preview area. ■ -restore restores the preview area. ■ -off closes the Results tab.
SUBMISSIONS <-max -restore -off>	<p>Displays the Submissions tab. These options are available:</p> <ul style="list-style-type: none"> ■ -max maximizes the preview area. ■ -restore restores the preview area. ■ -off closes the Submissions tab.
SUBMIT	Runs the currently selected code or all the code in the editor if no code is selected.
VIEWTABLE <library.table> <-last>	Opens the Select Table window. Use the library.table argument to specify the table to view.

Command Name	Description
	If no table is specified, use the <code>-last</code> option to open the last table that was generated in the current session.
ZOOM <-max><-restore>	Specifies the size of the tab area. These arguments are available. <ul style="list-style-type: none"> ■ <code>-max</code> specifies to maximize the size of the tab area. ■ <code>-restore</code> returns the tab area to the default size.


Specifying the Path to the Content: SAS Content or SAS Compute

When specifying the file path for these commands, you must prefix the directory path argument with `sascontent` or `sascompute` to specify where the file or folder is located.

Table A5.3 Command Names and Examples

Command Name	Example
EXPORTTABLE	<pre>exporttable "sascontent:/Users/userId/My Folder/Import" "air.csv" exporttable "sascompute:/your-server.com/userId/SAS Studio Content" "air.csv"</pre>
OPENFILE	<pre>openfile "sascontent:/Public/air.csv" openfile "sascompute:/your-server.com/userId/SAS Studio Content" "air.csv"</pre>
OPENENCODED	<pre>openencoded "sascontent:/Public/air.csv" -encoding utf8 openencoded "sascompute:/your-server.com/userId/SAS Studio Content" "air.csv" -encoding utf8</pre>
SAVE	<pre>save "sascontent:/Users/userId/My Folder" "air.csv" -force save "sascompute:/your-server.com/userId/SAS Studio Content" "air.csv" -force</pre>
SAVECODE	<pre>savecode "sascontent:/Users/userId/My Folder" "air.sas" -force savecode "sascompute:/your-server.com/userId/SAS Studio Content" "air.sas" -force</pre>
SAVELOG	<pre>savelog "sascontent:/Users/userId/My Folder" "air.log" -force savelog "sascompute:/your-server.com/userId/SAS Studio Content" "air.log" -force</pre>
SAVERESULTS	<pre>saveresults "sascontent:/Users/userId/My Folder" "air.html" saveresults "sascompute:/your-server.com/userId/SAS Studio Content" "air.html"</pre>
SAVEPACKAGE	<pre>savepackage "sascontent:/Users/userId/My Folder" "air.pkg" savepackage "sascompute:/your-server.com/userId/SAS Studio Content" "air.pkg"</pre>

Command Name	Example
SAVESUMMARY	savesummary "sascontent:/Users/userId/My Folder" "air.summar savesummary "sascompute:/your-server.com/userId/SAS Studio C

Note: For the syntax (including path information) for a specific control, click  to see the Help for each command in the command line interface.

Appendix 6

Transitioning to SAS Studio

<i>Tips for SAS Studio 3.x Users</i>	216
Overview of Differences	216
Process Flow Updates	216
File Storage	216
Queries	217
Tasks	217
Importing Data	217
Preferences	218
Configuration Properties	218
Themes	218
General User Interface and Feature Differences	218
<i>Tips for SAS Enterprise Guide Users</i>	219
Overview of Differences	219
Using the SAS®9 Content Assessment Tool	219
Opening a SAS Enterprise Guide Project in SAS Studio	220
Process Flow Differences	220
Query Differences	221
Importing Data	221
Task Differences	221
<i>Tips for SAS Data Integration Studio Users</i>	222
SAS Data Integration Studio and SAS Studio	222
Creating Flows	222
Migrating Jobs to Flows	223
Registering Libraries and Files	223
Using Nodes in a Flow	223
<i>Tips for SAS Universal Viewer Users</i>	224
SAS Universal Viewer and SAS Studio	224
Upload a SAS Data Set	224

Tips for SAS Studio 3.x Users

Overview of Differences

SAS Studio 2021.1 includes new flow functionality and an updated and simplified user interface with many new and existing options now available from an overflow menu. In most cases, your tasks, queries, and jobs work the same in SAS Studio 2021.1.

However, default file storage has changed significantly. The default file storage location is SAS Content, and administrators must configure access to the file system.

Process Flow Updates

Process flows were available in SAS Studio 3.x and enabled you to create a repeatable process flow based on references to specific columns, tables, tasks, and programs. Starting with SAS Studio 2021.1, a flow is a metadata-driven design tool that supports a sequence of operations on data by using nodes to represent the data and operations. Nodes are created by adding "steps" to your flow.

Flows are designed to enable you to manage complex processes by creating a generalized flow of data without hardcoding references to tables, columns, and operations ahead of time. You can update the specific attributes of any node in the flow by using the node properties. Ports represent the input source and output target of an operation node and can be accessed programmatically by the macro variables that are associated with each port. Nodes and ports can be used to provide metadata-based definitions so that you have greater flexibility in defining the content of your flow.

The types of nodes that are available to use in a flow can be accessed from the **Steps** section of the navigation pane. Additional steps are added to the **Steps** section with each new release of SAS Studio. For more information, see ["Understanding Steps and Nodes" in SAS Studio: Working with Flows](#).

You cannot currently convert saved SAS Studio 3.x process flows to SAS Studio 2021.1 flows, but you can create a SAS program from the nodes in a process flow. For more information, see ["Generating Code from a Process Flow" in SAS Studio 3.8: User's Guide](#).

File Storage

For SAS Studio 2021.1 users, the default file storage location is SAS Content. SAS Content locations are integrated with other applications on the SAS Viya platform,

such as SAS Drive, so that you can seamlessly share files among the applications and with other SAS users.

If you also need access to a file system to perform other tasks, such as working with a Git repository, your Kubernetes and SAS Studio administrators can create access to the file system during deployment. In SAS Studio 5.x, by default, you had access to both SAS Content and file system storage locations. For more information, see [“Creating Persistent File Storage” in SAS Studio: Administrator’s Guide](#).

Queries

In SAS Studio 2021.1, you can create both stand-alone and flow queries, and you can now add calculated columns that are based on other columns and values to a query. For more information, see [“Query” in SAS Studio: Working with Flows](#).

Saved queries from earlier versions of SAS Studio can be run in SAS Studio 2021.1 if the following criteria are met:

- The data that was used in the original query is available in SAS Studio 2021.1.
- The data that is available in SAS Studio 2021.1 is not missing any columns that were used in the original query.
- All tables that are included in the original query must have a defined join.

If a saved query cannot be migrated, SAS Studio converts the query to a program file and includes a note in the program that explains why the query could not be migrated.

Tasks

You can use all tasks, including any custom tasks, that were available in SAS Studio 3.x. You can also create custom tasks in SAS Studio 2021.1. For more information, see [“Create a Custom Task” on page 177](#).

You cannot include a task as a step in a flow in SAS Studio 2021.1. However, you can use the **Code to Flow** button on the task menu to copy the code that is automatically generated by a task to a new SAS Program node in an open flow. For more information, see [“Copying Code to a Flow” in SAS Studio: Working with Flows](#).

Importing Data

Your saved import task files (*.CTL) still work in SAS Studio 2021.1. If you are importing data as part of a flow, use the new Import step. For more information, see [“Importing Data from an External File” in SAS Studio: Working with Flows](#).

Preferences

Between SAS Studio 3.x and SAS Studio on the SAS Viya platform, the content of the Preferences window was reorganized. Some preferences, such as the preferences for the code editor, are common options and are not specific to SAS Studio.

If you are upgrading from SAS Studio 3.7 or earlier, the default value for the **SAS variable name policy** has changed to **ANY**. As a result, by default, the variable names can begin with or contain any characters, including blanks, must contain at least one character, and cannot contain any null bytes.

Configuration Properties


Your SAS Studio administrator can use configuration properties to customize your software. In SAS Studio 3.x, your administrator might have specified these customizations in the `config.properties` file. When you re-install or reconfigure SAS Studio, any customizations in the `config.properties` file are lost. Before you upgrade to a new release of SAS Studio or reconfigure SAS Studio, record any changes that you made to the `config.properties` file. After you re-install or reconfigure SAS Studio, you must reset these configuration properties in SAS Environment Manager.

The configuration properties in SAS Studio 3.x were prefaced with `webdms.` Some of these configuration properties are not used in the SAS Viya platform. Also, in SAS Studio on the SAS Viya platform, configuration properties are prefaced with `sas.studio.` For a list of the available configuration properties, see [“Configuration Properties for SAS Studio” in SAS Studio: Administrator’s Guide](#).

Themes

SAS Studio 2021.1 uses the same default corporate theme as all products on the SAS Viya platform. For more information, see [“Creating Global Settings” on page 180](#).

General User Interface and Feature Differences

Some of the options for SAS Studio features have been moved from the toolbar for that feature to an overflow menu (represented by  on the toolbar) in order to simplify the user interface.

Here are some of the new features that were added after SAS Studio 3.x:

- DATA Step debugger. For more information, see [“Using the DATA Step Debugger” on page 56](#).

- Expression Builder. For more information, see [“Building an Expression” on page 195](#).
- Jobs definitions and scheduling. For more information, see [SAS Studio Developer’s Guide: Working with Jobs](#).
- Console window. For more information, see [“Using the Console” on page 24](#).
- Command line interface. For more information, see [“About the Command Line Interface” on page 203](#).
- Interactive perspective. For more information, see [“Understanding Perspectives” on page 31](#).
- FedSQL queries. For more information, see [“Generating a FedSQL Query” on page 110](#).
- Manage keyboard shortcuts. For more information, see [“Managing Keyboard Shortcuts” on page 35](#).
- Open Files section of the navigation pane. For more information, see [“Accessing Your Open Files” on page 8](#).
- Git branching and merging. For more information, see [Chapter 6, “Understanding Git Integration in SAS Studio,” on page 141](#).

Tips for SAS Enterprise Guide Users

Overview of Differences

Both SAS Studio and SAS Enterprise Guide provide a point-and-click interface to SAS that enables you to create reports, graphs, and charts; access SAS servers and data; and analyze data. Both products also include ready-to-use tasks for analysis and reporting, a color-coded SAS language editor, and access to some of the most common features of Git.

The primary difference between SAS Studio and SAS Enterprise Guide is that SAS Studio is a tool that you can use to write and run SAS code through your web browser. SAS Enterprise Guide is a Microsoft Windows client application that you install on your machine.

Using the SAS®9 Content Assessment Tool

SAS®9 Content Assessment is a collection of applications that is designed to help you understand various characteristics of your SAS® 9.4 system. Each application examines your SAS®9 system for relevant information, gathers key details, and produces results from each part of the assessment.

You should run the SAS®9 Content Assessment tool before you upgrade to a new release. This tool identifies any problems that you might encounter when you

upgrade. For more information, see [“Executing the Import EG Projects Application” in SAS Content Assessment](#).

Opening a SAS Enterprise Guide Project in SAS Studio

SAS Enterprise Guide projects cannot currently be directly opened in SAS Studio, but you can use the following options for transitioning your work in a SAS Enterprise Guide project to SAS Studio 2021.1:

- You can use SAS Environment Manager to import your SAS Enterprise Guide project and create a SAS Studio flow file (*.flw) for each process flow in your project. Most SAS Enterprise Guide queries are converted to Query nodes in SAS Studio. Queries that cannot be converted to Query nodes are converted to SAS Program nodes. Other executable nodes in the SAS Enterprise Guide process flow, except for externally referenced programs (*.sas), are converted to SAS Program nodes in a SAS Studio flow. Links between nodes are maintained. For more information, see [“SAS Enterprise Guide” in SAS Viya Platform: Content Migration From SAS 9.4](#).
- Export the code from your project and open the code in SAS Studio 2021.1. For more information, see [“Export All Code” in SAS Enterprise Guide: User’s Guide](#).
- Convert the project to a SAS Studio 3.8 process flow, and then create a SAS program from the process flow. For information about converting a project to a process flow, see [“Generating Code from a Process Flow” in SAS Studio 3.8: User’s Guide](#).

Note:

- You might need to update references to data in your SAS Enterprise Guide project that are not accessible in SAS Studio.
 - When you begin working in SAS Studio with code that you developed or converted from SAS Enterprise Guide, you need to evaluate and update the code to make sure that it takes advantage of the new CAS programming language. For more information, see [Programming Documentation for SAS Viya](#).
-

Process Flow Differences

Process flows are available in SAS Enterprise Guide and are automatically created when you create a project in SAS Enterprise Guide. You can also create multiple additional process flows in your project. Process flows in SAS Enterprise Guide enable you to show the relationship between two or more objects that are based on references to specific columns, tables, tasks, and programs.

SAS Studio 2021.1 includes flows, which are a metadata-driven design tool that supports a sequence of operations on data by using nodes to represent the data and operations. Nodes are created by adding "steps" to your flow. Flows are designed to enable you to manage complex processes by creating a generalized

flow of data without hardcoding references to tables, columns, and operations ahead of time. You can update the specific attributes of any node in the flow by using the node properties. Ports represent the input source and output target of an operation node and can be accessed programmatically by the macro variables that are associated with each port. Nodes and ports can be used to provide metadata-based definitions so that you have greater flexibility in defining the content of your flow.

The types of nodes that are available to use in a flow can be accessed from the **Steps** section of the navigation pane. Additional steps are added to the **Steps** section with each new release of SAS Studio. For more information, see [“What Is a Flow?” in SAS Studio: Working with Flows](#).

Query Differences

Queries in SAS Enterprise Guide and SAS Studio offer much of the same functionality. Queries in both products can be based on one or more tables and can include computed, or calculated, columns that are based on other columns or values. In SAS Enterprise Guide, you use the Query Builder to create a query as part of a project. In SAS Studio 2021.1, you can create both stand-alone and flow queries, and you can choose to create your query by using PROC FEDSQL instead of PROC SQL. For more information, see [“Query” in SAS Studio: Working with Flows](#).

Importing Data

Both SAS Enterprise Guide and SAS Studio enable you to create SAS data sets by importing text, CSV, Microsoft Excel, and many other PC-based database files. SAS Enterprise Guide uses the Import Data wizard to import files. SAS Studio has two types of import functionality. The quick import enables you to quickly import data from the file system or from SAS Content by selecting a few options. You can also import data into a flow. This import functionality is more robust and provides additional options. For more information, see [“About Importing Data to SAS Studio” on page 126](#).

Task Differences

Both SAS Enterprise Guide and SAS Studio contain SAS tasks, which are graphical interfaces to SAS procedures from simple data listings to complex analytical procedures. In SAS Enterprise Guide, you could have these types of tasks:

- predefined tasks that ship with SAS Enterprise Guide.
- SAS Studio tasks. If you have SAS Enterprise Guide and SAS Studio at your site, you can access SAS Studio tasks in SAS Enterprise Guide.
- custom tasks. You can develop custom tasks for your site and make these available in SAS Enterprise Guide.

The underlying technology for the SAS Enterprise Guide tasks and SAS Studio tasks differs, so you cannot open a SAS Enterprise Guide task by using the task interface in SAS Studio.

To transition a predefined task, a SAS Studio task, or a custom task from SAS Enterprise Guide to SAS Studio:

- 1 In SAS Enterprise Guide, export the SAS code.
- 2 In SAS Studio, open the exported SAS code.

Tips for SAS Data Integration Studio Users


SAS Data Integration Studio and SAS Studio

The data management features in SAS Studio are not currently a direct replacement for SAS Data Integration Studio. More data management features are made available with each new release of SAS Studio.

Creating Flows

SAS Studio flows are like SAS Data Integration Studio jobs. Flows are built from a sequence of data and operation nodes, which you can connect in order to specify the order of execution. For example, the next figure shows a flow that selects the number of home runs for each player in a table of baseball data.

Figure A6.1 Flow That Selects Home Run Data

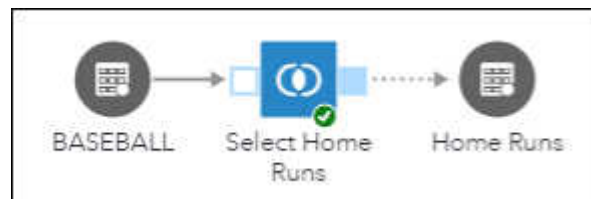

- BASEBALL is a Table node that specifies an input table of data about baseball teams.
- Select Home Runs is a Query node that selects the number of home runs for each player in the BASEBALL table.
- Home Runs is a Table node that specifies the output table for the query.

For more information about working with flows, see the following topics:

- [“Creating a Flow” in SAS Studio: Working with Flows](#)
- [“Opening a Flow” in SAS Studio: Working with Flows](#)
- [“Understanding the Flow Tab” in SAS Studio: Working with Flows](#)
- [“Running a Flow” in SAS Studio: Working with Flows](#)

Migrating Jobs to Flows

You can use the Export to SAS Package wizard in SAS Data Integration Studio or SAS Management Console to export jobs. For more information about export, see [“SAS Data Integration Studio Jobs and Transformations” in SAS Viya Platform: Content Migration From SAS 9.4.](#)

You can import these jobs in SAS Environment Manager on the SAS Viya platform. During import, the jobs are converted to SAS Studio flows. The code that is generated for a Hadoop transformation will be updated to use the Hadoop REST API.

Registering Libraries and Files

Tables or files can be sources or targets in a flow. The **Libraries** section of the navigation pane enables you to access the SAS libraries that are available to you. For more information, see [“Working with Libraries” on page 11.](#)

Flows are saved as files. The **Explorer** section in the navigation pane enables you to access files and folders from your folder shortcuts, your server file system, and your SAS Content Server locations. For more information, see [“Using the Explorer” on page 8.](#)

Using Nodes in a Flow

Nodes in a SAS Studio flow are like transformations in SAS Data Integration Studio jobs. Flow nodes can be accessed from the **Steps** section of the navigation pane. Only nodes in that section can be used in a flow. The following node types are included in SAS Studio Basic:

- The Export node enables you to save data to a delimited file (*.csv, *.dlm, *.tab, *.tsv), a text file, or a Microsoft Excel file (*.xls, *.xlsx). For more information, see [“Exporting Data to an External File” in SAS Studio: Working with Flows.](#)
- The File node specifies an external source file in a flow. For more information, see [“Adding an External File to a Flow” in SAS Studio: Working with Flows.](#)
- The Import node converts an external file to a SAS data set in a flow. For more information, see [“Importing Data from an External File” in SAS Studio: Working with Flows.](#)

- The Table node references a SAS data set in a flow. For more information, see [“Adding a Table from a SAS Library to a Flow” in SAS Studio: Working with Flows](#).
- The SAS Program node specifies a new SAS program, a saved SAS program, or a snippet in a flow. For more information, see [“SAS Program Step: Writing SAS Code in a Flow” in SAS Studio: Working with Flows](#).
- The Query node extracts data from one or more tables in a flow according to criteria that you specify. For more information, see [“Query” in SAS Studio: Working with Flows](#).
- The Sort node orders output data in a flow by the values of one or more source columns. For more information, see [“Sort” in SAS Studio: Working with Flows](#).

You can use the node properties under the flow canvas to specify the attributes and content of the node, as explained in the preceding topics.

Tips for SAS Universal Viewer Users



SAS Universal Viewer and SAS Studio

Both SAS Universal Viewer and SAS Studio allow you to view SAS data sets, filter data, show or hide specific columns, sort data, and view SAS programs.

The primary difference between SAS Studio and SAS Universal Viewer is that to view data in SAS Studio, you must first upload the data in SAS Studio.

Upload a SAS Data Set

To upload and view a SAS data set that is stored on your local machine:

- 1 Click the **Explorer** section of the navigation pane and navigate to the folder to which you want to upload the data. In the Explorer section toolbar, click .
- 2 In the Upload Files window, click  and browse to find the data that you want to upload. Click **Open** and then click **Upload**. The uploaded data is added to the list of files in the **Explorer** section of the navigation pane.
- 3 To view the data set, double-click the data set name. The data set opens in the table viewer.

For more information about viewing, sorting, or filtering your data, see [“About the Table Viewer” on page 113](#).

You can upload other types of data files, in addition to SAS data sets. For more information, see [“Importing Data” on page 126](#).

Appendix 7

Summary of SAS Studio Functionality

<i>About SAS Studio Licenses</i>	225
<i>Summary of Flow Functionality</i>	225
<i>Summary of Custom Steps Functionality</i>	231

About SAS Studio Licenses

SAS Studio is available in three different licenses:

- SAS Studio Basic
- SAS Studio Analyst
- SAS Studio Engineer

The functionality in each license can differ slightly.

Summary of Flow Functionality

This table lists the steps that are available in flows for each license of SAS Studio.

Table A7.1 Summary of Flow Steps

Step	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
Custom Steps	Enables you to create a user interface for users at your site to complete a specific task.	✓	✓	✓
Export	Exports data to an external file.	✓	✓	✓
File	References an external file.	✓	✓	✓
Geocoding	Provides a way to convert address data into map locations	✓	✓	✓
Import	Converts an external file to a SAS data set. Supports importing delimited and Microsoft Excel files. Supports importing fixed width files and the ability to load column structure metadata from an external file.	✓	✓	✓
Manage Columns	Selects a subset of columns from an input table and writes the columns to an output table.	✓	✓	✓
Python Program	Supports writing and running Python	✓	✓	✓

Step	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
	programs in a flow.			
Query	Extracts data from one or more tables according to criteria that you specify.	✓	✓	✓
Remove Duplicates	Enables you to remove duplicate rows from a source table.	✓	✓	✓
SAS Program	Supports writing and running SAS programs in a flow.	✓	✓	✓
Sort	Enables you to order your data by the values of one or more columns.	✓	✓	✓
Table	References a source table or specifies the physical location of an output table.	✓	✓	✓
Verify & Geocode Addresses - Loqate	Enables you to verify address information and obtain geocode coordinates from the Loqate Verify Address API.	✓	✓	✓
Verify Email Addresses - Loqate	Enables you to verify email addresses that use the Loqate Verify Email Addresses API.	✓	✓	✓

Step	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
Verify Phone Numbers - Loqate	Enables you to verify phone numbers that use the Loqate Verify Phone Numbers API.	✓	✓	✓
Bar Chart	Creates horizontal or vertical bar charts that compare numeric values or statistics between different values of a chart variable.		✓	✓
Bar-Line Chart	Creates a vertical bar chart with a line chart overlay.		✓	✓
Branch Rows	Splits a table into two output tables based on conditions that you specify.		✓	✓
Calculate Columns	Creates an output table that is based on the input table. You can create or modify columns in the output table.		✓	✓
Filter Rows	Selects a subset of rows from an input table and writes the rows to an output table.		✓	✓
Insert Rows	Inserts the rows from an input table into		✓	✓

Step	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
	an output table.			
One-Way Frequencies	Generates frequency tables from your data. You can also use this step to perform binomial and chi-square tests.		✓	✓
Rank Data	Computes ranks for one or more numeric variables across the rows in a table and includes the ranks in an output table.		✓	✓
Transpose Data	Turns selected columns of an input table into the rows of an output table.		✓	✓
Union Rows	Enables you to combine data from multiple sources into a single target table.		✓	✓
Execute Decisions	Enables you to add a published decision from SAS Intelligent Decisioning to a flow.			✓
Implement SCD	Enables you to use the slowly changing dimensions (SCD) process to load data into target			✓

Step	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
	dimension tables.			
Load Table	Enables you to load a source table into a target table. You can apply insert, update or both techniques as well as to create a new table.			✓
Merge Table	Enables you to make changes to columns in a target table based on values from a source table. The source and target tables must be DBMS tables that support ANSI SQL standards. The Merge Table step combines update and insert operations in one step and supports only in-database processing.			✓

This table summarizes the flow features available in each version of SAS Studio.

Table A7.2 Summary of Flow Features Functionality

Feature	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
Flow notes	Create notes for a flow or add a note to a flow node.	✓	✓	✓

Feature	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
Public API	Identify a SAS program or flow and return the SAS code that is generated by the program or flow.	✓	✓	✓
Swimlanes	Control the execution order of your flow by grouping nodes into swimlanes and specifying the order in which the swimlanes are run.	✓	✓	✓
Code Optimization	Certain steps combination can be automatically optimized.		✓	✓
Subflows	Ability to reference flows from SAS Content in a flow.		✓	✓

Summary of Custom Steps Functionality

Custom steps are available from the Standard perspective. Custom steps are not available in the Interactive perspective.

This table lists the functionality that is available for custom steps.

Table A7.3 Summary of Custom Steps Functionality

Feature	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
Cascading prompts	Uses prompt hierarchies to create data dependencies between controls.	✓	✓	✓
Define the output column structure	Marks ports as new, dropped, keep so that flows know how to cascade columns without running the step to generate the output table.	✓	✓	✓
Dependencies	Enables the step author to specify the state of the prompt based on the values of other prompts.	✓	✓	✓
Designer, which consists of the Designer, Prompt UI, and Program tabs.	Enables the step author to create or edit a custom step.	Yes, except Designer tab Note: The Designer tab is the drag-and-drop user interface in the Designer. It is not available in SAS Studio Basic. Users must create custom tasks using JSON code in the Prompt UI .	✓	✓
Stand-alone custom steps	Runs a custom step outside a flow.	✓	✓	✓

Feature	Description	SAS Studio Basic	SAS Studio Analyst	SAS Studio Engineer
Upload a custom step to SAS Server or SAS Content	Enables you to access custom steps from the SAS Server or SAS content.	✓	✓	✓
Add a custom step to a flow	Enables you to add a custom step to a flow.		✓	✓

