

SAS/STAT 15.2[®]

User's Guide

The SURVEYREG

Procedure

This document is an individual chapter from *SAS/STAT® 15.2 User's Guide*.

The correct bibliographic citation for this manual is as follows: SAS Institute Inc. 2020. *SAS/STAT® 15.2 User's Guide*. Cary, NC: SAS Institute Inc.

SAS/STAT® 15.2 User's Guide

Copyright © 2020, SAS Institute Inc., Cary, NC, USA

All Rights Reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication, or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a), and DFAR 227.7202-4, and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.

SAS Institute Inc., SAS Campus Drive, Cary, NC 27513-2414

November 2020

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.

SAS software may be provided with certain third-party software, including but not limited to open-source software, which is licensed under its applicable third-party software license agreement. For license information about third-party software distributed with SAS software, refer to <http://support.sas.com/thirdpartylicenses>.

Chapter 122

The SURVEYREG Procedure

Contents

Overview: SURVEYREG Procedure	10082
Getting Started: SURVEYREG Procedure	10083
Simple Random Sampling	10083
Stratified Sampling	10085
Output Data Sets	10088
Syntax: SURVEYREG Procedure	10089
PROC SURVEYREG Statement	10090
BY Statement	10102
CLASS Statement	10103
CLUSTER Statement	10104
CONTRAST Statement	10104
DOMAIN Statement	10106
EFFECT Statement	10107
ESTIMATE Statement	10108
LSMEANS Statement	10109
LSMESTIMATE Statement	10110
MODEL Statement	10111
OUTPUT Statement	10114
REPWEIGHTS Statement	10115
SLICE Statement	10117
STORE Statement	10117
STRATA Statement	10117
TEST Statement	10118
WEIGHT Statement	10119
Details: SURVEYREG Procedure	10119
Missing Values	10119
Survey Design Information	10120
Computational Details	10121
Variance Estimation	10125
Testing	10133
Domain Analysis	10134
Computational Resources	10134
Output Data Sets	10135
Displayed Output	10136
ODS Table Names	10141
ODS Graphics	10142

Examples: SURVEYREG Procedure	10143
Example 122.1: Simple Random Sampling	10143
Example 122.2: Cluster Sampling	10146
Example 122.3: Regression Estimator for Simple Random Sample	10149
Example 122.4: Stratified Sampling	10150
Example 122.5: Regression Estimator for Stratified Sample	10156
Example 122.6: Stratum Collapse	10159
Example 122.7: Domain Analysis	10163
Example 122.8: Comparing Domain Statistics	10166
Example 122.9: Variance Estimate Using the Jackknife Method	10172
References	10174

Overview: SURVEYREG Procedure

The SURVEYREG procedure performs regression analysis for sample survey data. This procedure can handle complex survey sample designs, including designs with stratification, clustering, and unequal weighting. The procedure fits linear models for survey data and computes regression coefficients and their variance-covariance matrix. PROC SURVEYREG also provides significance tests for the model effects and for any specified estimable linear functions of the model parameters. Using the regression model, the procedure can compute predicted values for the sample survey data.

PROC SURVEYREG uses elementwise regression to compute the regression coefficient estimators by generalized least squares estimation. The procedure assumes that the regression coefficients are the same across strata and primary sampling units (PSUs). To estimate the variance-covariance matrix for the regression coefficients, PROC SURVEYREG uses either the Taylor series (linearization) method or replication (resampling) methods to estimate sampling errors of estimators, based on complex sample designs. For details see Woodruff (1971); Fuller (1975); Särndal, Swensson, and Wretman (1992); Wolter (2007); Rust (1985); Dippo, Fay, and Morganstein (1984); Rao and Shao (1999); Rao, Wu, and Yue (1992); and Rao and Shao (1996).

PROC SURVEYREG uses the Output Delivery System (ODS), a SAS subsystem that provides capabilities for displaying and controlling the output from SAS procedures. ODS enables you to convert any of the output from PROC SURVEYREG into a SAS data set. For more information, see the section “[ODS Table Names](#)” on page 10141.

PROC SURVEYREG uses ODS Graphics to create graphs as part of its output. For general information about ODS Graphics, see Chapter 23, “[Statistical Graphics Using ODS](#).” For specific information about the statistical graphics available with the SURVEYREG procedure, see the `PLOTS=` option in the PROC SURVEYREG statement and the section “[ODS Graphics](#)” on page 10142.

Getting Started: SURVEYREG Procedure

This section demonstrates how you can use PROC SURVEYREG to perform a regression analysis for sample survey data. For a complete description of the usage of PROC SURVEYREG, see the section “[Syntax: SURVEYREG Procedure](#)” on page 10089. The section “[Examples: SURVEYREG Procedure](#)” on page 10143 provides more detailed examples that illustrate the applications of PROC SURVEYREG.

Simple Random Sampling

Suppose that, in a junior high school, there are a total of 4,000 students in grades 7, 8, and 9. You want to know how household income and the number of children in a household affect students’ average weekly spending for ice cream.

In order to answer this question, you draw a sample by using simple random sampling from the student population in the junior high school. You randomly select 40 students and ask them their average weekly expenditure for ice cream, their household income, and the number of children in their household. The answers from the 40 students are saved as the following SAS data set IceCream:

```
data IceCream;
  input Grade Spending Income Kids @@;
  datalines;
7 7 39 2 7 7 38 1 8 12 47 1
9 10 47 4 7 1 34 4 7 10 43 2
7 3 44 4 8 20 60 3 8 19 57 4
7 2 35 2 7 2 36 1 9 15 51 1
8 16 53 1 7 6 37 4 7 6 41 2
7 6 39 2 9 15 50 4 8 17 57 3
8 14 46 2 9 8 41 2 9 8 41 1
9 7 47 3 7 3 39 3 7 12 50 2
7 4 43 4 9 14 46 3 8 18 58 4
9 9 44 3 7 2 37 1 7 1 37 2
7 4 44 2 7 11 42 2 9 8 41 2
8 10 42 2 8 13 46 1 7 2 40 3
9 6 45 1 9 11 45 4 7 2 36 1
7 9 46 1
;
```

In the data set IceCream, the variable Grade indicates a student’s grade. The variable Spending contains the dollar amount of each student’s average weekly spending for ice cream. The variable Income specifies the household income, in thousands of dollars. The variable Kids indicates how many children are in a student’s family.

The following PROC SURVEYREG statements request a regression analysis:

```
title1 'Ice Cream Spending Analysis';
title2 'Simple Random Sample Design';
proc surveyreg data=IceCream total=4000;
  class Kids;
  model Spending = Income Kids / solution;
run;
```

The PROC SURVEYREG statement invokes the procedure. The TOTAL=4000 option specifies the total in the population from which the sample is drawn. The CLASS statement requests that the procedure use the variable Kids as a classification variable in the analysis. The MODEL statement describes the linear model that you want to fit, with Spending as the dependent variable and Income and Kids as the independent variables. The SOLUTION option in the MODEL statement requests that the procedure output the regression coefficient estimates.

Figure 122.1 displays the summary of the data, the summary of the fit, and the levels of the classification variable Kids. The “Fit Statistics” table displays the denominator degrees of freedom, which are used in F tests and t tests in the regression analysis.

Figure 122.1 Summary of Data
Ice Cream Spending Analysis
Simple Random Sample Design
The SURVEYREG Procedure
Regression Analysis for Dependent Variable Spending

Data Summary	
Number of Observations	40
Mean of Spending	8.75000
Sum of Spending	350.00000

Fit Statistics	
R-Square	0.8132
Root MSE	2.4506
Denominator DF	39

Class Level Information	
CLASS	
Variable	Levels Values
Kids	4 1 2 3 4

Figure 122.2 displays the tests for model effects. The effect Income is significant in the linear regression model, while the effect Kids is not significant at the 5% level.

Figure 122.2 Testing Effects in the Regression

Tests of Model Effects			
Effect	Num DF	F Value	Pr > F
Model	4	119.15	<.0001
Intercept	1	153.32	<.0001
Income	1	324.45	<.0001
Kids	3	0.92	0.4385

Note: The denominator degrees of freedom for the F tests is 39.

The regression coefficient estimates and their standard errors and associated t tests are displayed in Figure 122.3.

Figure 122.3 Regression Coefficients

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	-26.084677	2.46720403	-10.57	<.0001
Income	0.775330	0.04304415	18.01	<.0001
Kids 1	0.897655	1.12352876	0.80	0.4292
Kids 2	1.494032	1.24705263	1.20	0.2381
Kids 3	-0.513181	1.33454891	-0.38	0.7027
Kids 4	0.000000	0.00000000	.	.

Note: The degrees of freedom for the t tests is 39.

Matrix X'X is singular and a generalized inverse was used to solve the normal equations. Estimates are not unique.

Stratified Sampling

Suppose that the previous student sample is actually selected by using a stratified sample design. The strata are the grades in the junior high school: 7, 8, and 9. Within the strata, simple random samples are selected. Table 122.1 provides the number of students in each grade.

Table 122.1 Students in Grades

Grade	Number of Students
7	1,824
8	1,025
9	1,151
Total	4,000

In order to analyze this sample by using PROC SURVEYREG, you need to input the stratification information by creating a SAS data set that contains the information in Table 122.1. The following SAS statements create such a data set, named StudentTotals:

```
data StudentTotals;
  input Grade _TOTAL_;
  datalines;
7 1824
8 1025
9 1151
;
```

The variable Grade is the stratification variable, and the variable _TOTAL_ contains the total numbers of students in each stratum in the survey population. PROC SURVEYREG requires you to use the keyword _TOTAL_ as the name of the variable that contains the population totals.

When the sample design is stratified and the stratum sampling rates are unequal, you should use sampling weights to reflect this information in the analysis. For this example, the appropriate sampling weights are the reciprocals of the probabilities of selection. You can use the following DATA step to create the sampling weights:

```

data IceCream;
  set IceCream;
  if Grade=7 then Prob=20/1824;
  if Grade=8 then Prob=9/1025;
  if Grade=9 then Prob=11/1151;
  Weight=1/Prob;
run;

```

If you use PROC SURVEYSELECT to select your sample, PROC SURVEYSELECT creates these sampling weights for you.

The following statements demonstrate how you can fit a linear model while incorporating the sample design information (stratification and unequal weighting):

```

ods graphics on;
title1 'Ice Cream Spending Analysis';
title2 'Stratified Sample Design';
proc surveyreg data=IceCream total=StudentTotals;
  strata Grade /list;
  model Spending = Income;
  weight Weight;
run;

```

Comparing these statements to those in the section “Simple Random Sampling” on page 10083, you can see how the TOTAL=StudentTotals option replaces the previous TOTAL=4000 option.

The STRATA statement specifies the stratification variable Grade. The LIST option in the STRATA statement requests that the stratification information be displayed. The WEIGHT statement specifies the weight variable.

Figure 122.4 summarizes the data information, the sample design information, and the fit information. Because of the stratification, the denominator degrees of freedom for F tests and t tests are 37, which are different from those in the analysis in Figure 122.1.

Figure 122.4 Summary of the Regression

Ice Cream Spending Analysis Stratified Sample Design

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Spending

Data Summary	
Number of Observations	40
Sum of Weights	4000.0
Weighted Mean of Spending	9.14130
Weighted Sum of Spending	36565.2

Design Summary	
Number of Strata	3

Figure 122.4 *continued*

Fit Statistics	
R-Square	0.8037
Root MSE	2.4371
Denominator DF	37

Figure 122.5 displays the following information for each stratum: the value of the stratification variable, the number of observations (sample size), the total population size, and the sampling rate (fraction).

Figure 122.5 Stratification Information

Stratum Information					
Stratum Index	Grade	N Obs	Population		Sampling Rate
			Total		
1	7	20	1824		1.10%
2	8	9	1025		0.88%
3	9	11	1151		0.96%

Figure 122.6 displays the tests for significance of the model effects. The Income effect is strongly significant at the 5% level.

Figure 122.6 Testing Effects

Tests of Model Effects				
Effect	Num DF	F Value	Pr > F	
Model	1	492.39	<.0001	
Intercept	1	225.81	<.0001	
Income	1	492.39	<.0001	

Note: The denominator degrees of freedom for the F tests is 37.

Figure 122.7 displays the regression coefficient estimates, their standard errors, and the associated t tests for the stratified sample.

Figure 122.7 Regression Coefficients

Estimated Regression Coefficients				
Parameter	Estimate	Standard		Pr > t
		Error	t Value	
Intercept	-23.416322	1.55827214	-15.03	<.0001
Income	0.731052	0.03294520	22.19	<.0001


Note: The degrees of freedom for the t tests is 37.

You can request other statistics and tests by using PROC SURVEYREG. You can also analyze data from a more complex sample design. The remainder of this chapter provides more detailed information.

When ODS Graphics is enabled and the model contains a single continuous regressor, PROC SURVEYREG provides a fit plot that displays the regression line and the confidence limits of the mean predictions. Figure 122.8 displays the fit plot for the regression model of Spending as a function of Income. The regression line and confidence limits of mean prediction are overlaid by a bubble plot of the data, in which

the bubble area is proportional to the sampling weight of an observation.

Figure 122.8 Regression Fitting

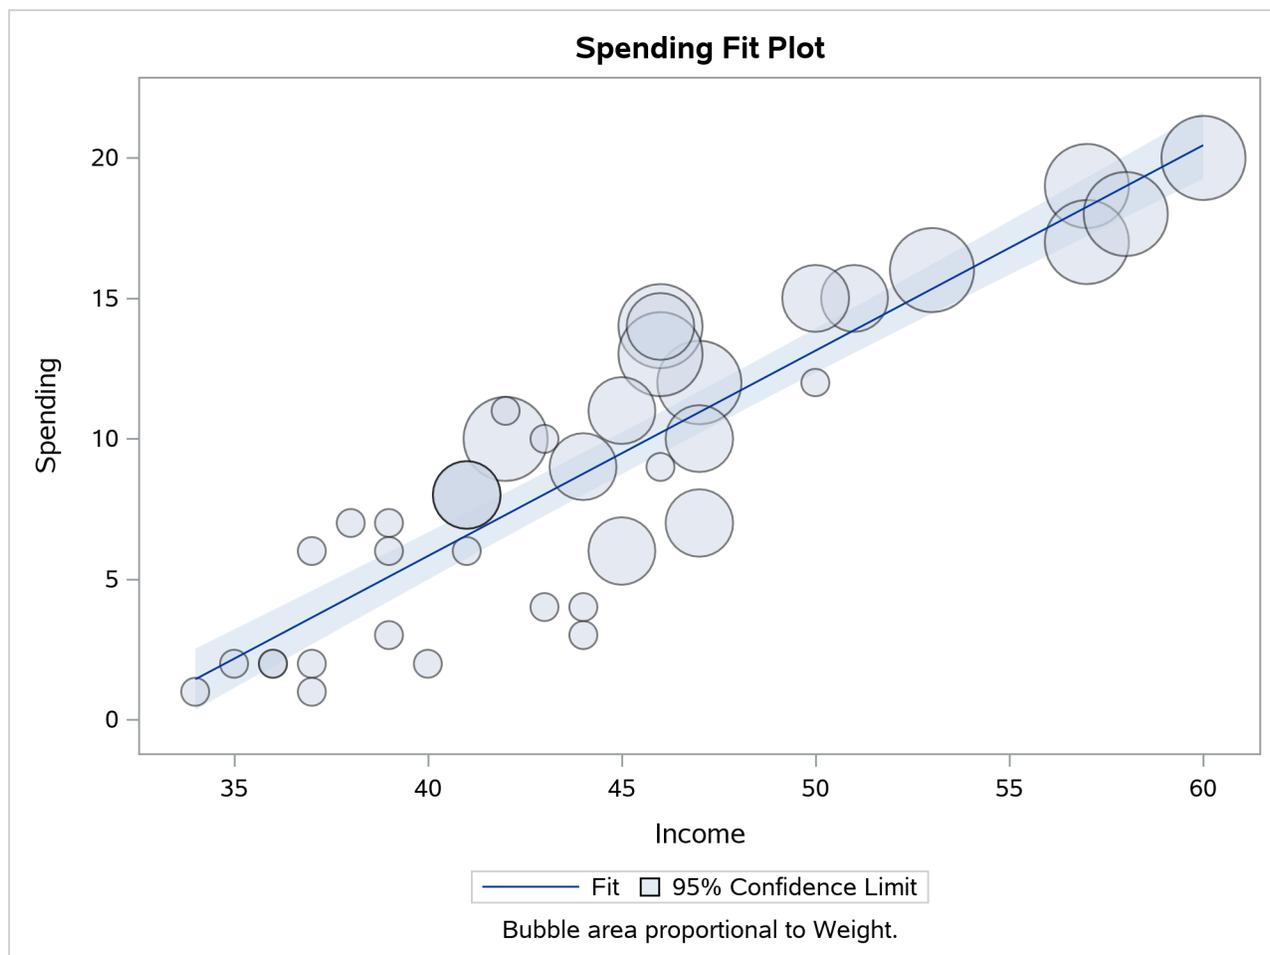

Output Data Sets

You can use the OUTPUT statement to create a new SAS data set that contains the estimated linear predictors and their standard error estimates, the residuals from the linear regression, and the confidence limits for the predictors. See the section “[OUTPUT Statement](#)” on page 10114 for more details.

You can use the Output Delivery System (ODS) to create SAS data sets that capture the outputs from PROC SURVEYREG. For more information about ODS, see Chapter 22, “[Using the Output Delivery System.](#)”

For example, to save the ParameterEstimates table ([Figure 122.7](#)) in the previous section in an output data set, you use the ODS OUTPUT statement as follows:

```

title1 'Ice Cream Spending Analysis';
title2 'Stratified Sample Design';
proc surveyreg data=IceCream total=StudentTotals;
  strata Grade /list;
  model Spending = Income;

```

```

weight Weight;
ods output ParameterEstimates = MyParmEst;
run;

```

The statement

```
ods output ParameterEstimates = MyParmEst;
```

requests that the ParameterEstimates table that appears in [Figure 122.7](#) be placed into a SAS data set MyParmEst.

The PRINT procedure displays observations of the data set MyParmEst:

```

proc print data=MyParmEst;
run;

```

[Figure 122.9](#) displays the observations in the data set MyParmEst. The section “ODS Table Names” on page 10141 gives the complete list of the tables produced by PROC SURVEYREG.

Figure 122.9 The Data Set MyParmEst

**Ice Cream Spending Analysis
Stratified Sample Design**

Obs	Parameter	Estimate	StdErr	DenDF	tValue	Probt
1	Intercept	-23.416322	1.55827214	37	-15.03	<.0001
2	Income	0.731052	0.03294520	37	22.19	<.0001

Syntax: SURVEYREG Procedure

The following statements are available in the SURVEYREG procedure:

```

PROC SURVEYREG < options > ;
  BY variables ;
  CLASS variables ;
  CLUSTER variables ;
  CONTRAST 'label' effect values < ... effect values > < / options > ;
  DOMAIN variables < variable*variable variable*variable*variable ... > ;
  EFFECT name = effect-type (variables < / options > ) ;
  ESTIMATE < 'label' > estimate-specification < / options > ;
  LSMEANS < model-effects > < / options > ;
  LSMESTIMATE model-effect lsmestimate-specification < / options > ;
  MODEL dependent = < effects > < / options > ;
  OUTPUT < keyword< =variable-name > ... keyword< =variable-name > > < / option > ;
  REPWEIGHTS variables < / options > ;
  SLICE model-effect < / options > ;
  STORE < OUT= > item-store-name < / LABEL= 'label' > ;
  STRATA variables < / options > ;
  TEST < model-effects > < / options > ;
  WEIGHT variable ;

```

The PROC SURVEYREG and MODEL statements are required. If your model contains classification effects, you must list the classification variables in a CLASS statement, and the CLASS statement must precede the MODEL statement. If you use a CONTRAST statement or an ESTIMATE statement, the MODEL statement must precede the CONTRAST or ESTIMATE statement.

The rest of this section provides detailed syntax information for each of the preceding statements, except the EFFECT, ESTIMATE, LSMEANS, LSMESTIMATE, SLICE, STORE, and TEST statements. These statements are also available in many other procedures. Summary descriptions of functionality and syntax for these statements are shown in this chapter, and full documentation about them is available in Chapter 19, “Shared Concepts and Topics.”

The CLASS, CLUSTER, CONTRAST, EFFECT, ESTIMATE, LSMEANS, LSMESTIMATE, REPWEIGHTS, SLICE, STRATA, TEST statements can appear multiple times. You should use only one of each of the following statements: MODEL, WEIGHT, STORE, and OUTPUT.

The syntax descriptions begin with the PROC SURVEYREG statement; the remaining statements are covered in alphabetical order.

PROC SURVEYREG Statement

```

PROC SURVEYREG < options > ;

```

The PROC SURVEYREG statement invokes the SURVEYREG procedure. It optionally names the input data sets and specifies the variance estimation method.

Table 122.2 summarizes the *options* available in the PROC SURVEYREG statement.

Table 122.2 PROC SURVEYREG Statement Options

Option	Description
ALPHA=	Sets the confidence level

Table 122.2 *continued*

Option	Description
DATA=	Specifies the SAS data set to be analyzed
MISSING	Treats missing values as a valid category
NAMELEN=	Specifies the length of effect names
NOMCAR	Treats missing values as <i>not missing completely at random</i>
ORDER=	Specifies the sort order
PLOTS=	Requests plots from ODS Graphics
RATE=	Specifies the sampling rate
TOTAL=	Specifies the total number of primary sampling units
TRUNCATE	Specifies class levels using no more than the first 16 characters of the formatted values
VARMETHOD=	Specifies the variance estimation method

You can specify the following *options* in the PROC SURVEYREG statement:

ALPHA= α

sets the confidence level for confidence limits. The value of the ALPHA= option must be between 0 and 1, and the default value is 0.05. A confidence level of α produces $100(1 - \alpha)\%$ confidence limits. The default of ALPHA=0.05 produces 95% confidence limits.

DATA=SAS-data-set

specifies the SAS data set to be analyzed by PROC SURVEYREG. If you omit the DATA= option, the procedure uses the most recently created SAS data set.

MISSING

treats missing values as a valid (nonmissing) category for all categorical variables, which include CLASS, STRATA, CLUSTER, and DOMAIN variables.

By default, if you do not specify the MISSING option, an observation is excluded from the analysis if it has a missing value. For more information, see the section “Missing Values” on page 10119.

NAMELEN= n

specifies the length of effect names in tables and output data sets to be n characters, where n is a value between 40 and 200. The default length is 40 characters.

NOMCAR

treats that missing values in the variance computation as *not missing completely at random* (NOMCAR) for Taylor series variance estimation. When you specify this option, PROC SURVEYREG computes variance estimates by analyzing the nonmissing values as a domain or subpopulation, where the entire population includes both nonmissing and missing domains. For more information, see the section “Missing Values” on page 10119.

By default, PROC SURVEYREG completely excludes an observation from analysis if that observation has a missing value, unless you specify the MISSING option. Note that the NOMCAR option has no effect on a classification variable when you specify the MISSING option, which treats missing values as a valid nonmissing level.

The NOMCAR option applies only to Taylor series variance estimation; it is ignored for replication methods.

ORDER=DATA | FORMATTED | FREQ | INTERNAL

specifies the sort order for the levels of the classification variables (which are specified in the **CLASS** statement).

This option also determines the sort order for the levels of **DOMAIN** variables.

This option applies to the levels for all classification variables, except when you use the (default) **ORDER=FORMATTED** option with numeric classification variables that have no explicit format. In that case, the levels of such variables are ordered by their internal value.

The **ORDER=** option can take the following values:

Value of ORDER=	Levels Sorted By
DATA	Order of appearance in the input data set
FORMATTED	External formatted value, except for numeric variables with no explicit format, which are sorted by their unformatted (internal) value
FREQ	Descending frequency count; levels with the most observations come first in the order
INTERNAL	Unformatted value

By default, **ORDER=FORMATTED**. For **ORDER=FORMATTED** and **ORDER=INTERNAL**, the sort order is machine-dependent.

For more information about sort order, see the chapter on the **SORT** procedure in the *Base SAS Procedures Guide* and the discussion of BY-group processing in *SAS Language Reference: Concepts*.

PLOTS < (*global-plot-options*) > < = *plot-request* < (*plot-option*) > >

PLOTS < (*global-plot-options*) > < = (*plot-request* < (*plot-option*) > < ... *plot-request* < (*plot-option*) > >) >

controls the plots that are produced through ODS Graphics.

When ODS Graphics is enabled and when the regression model depends on at most one continuous variable as a regressor, excluding the intercept, the **PLOTS=** option in the **PROC SURVEYREG** statement controls fit plots for the regression.

A *plot-request* identifies the plot, and a *plot-option* controls the appearance and content of the plot. You can specify *plot-options* in parentheses after a *plot-request*. A *global-plot-option* applies to all plots for which it is available unless it is altered by a specific *plot-option*. You can specify *global-plot-options* in parentheses after the **PLOTS** option.

When you specify only one *plot-request*, you can omit the parentheses around it. Here are a few examples of requesting plots:

```
plots=all
plots(weight=heatmap)=fit
```

When the regression model depends on at most one continuous variable as a regressor, excluding the intercept, **PROC SURVEYREG** provides a bubble plot or a heat map for model fitting. In a bubble plot,

the bubble area is proportional to the weight of an observation. In a heat map, the heat color represents the sum of the weights at the corresponding location. The default plot depends on the number of observations in your data. That is, for a data set that contains 100 observations or less, a bubble plot is the default. For a data set that contains more than 100 observations, a heat map is the default.

ODS Graphics must be enabled before you can request a plot. For example:

```
ods graphics on;
proc surveyreg plots=fit;
  model height=weight;
run;
```

For more information about enabling and disabling ODS Graphics, see the section “[Enabling and Disabling ODS Graphics](#)” on page 651 in Chapter 23, “[Statistical Graphics Using ODS](#).”

When ODS Graphics is enabled, the `ESTIMATE`, `LSMEANS`, `LSMESTIMATE`, and `SLICE` statements can produce plots that are associated with their analyses. For information about these plots, see the corresponding sections of Chapter 19, “[Shared Concepts and Topics](#).”

For general information about ODS Graphics, see Chapter 23, “[Statistical Graphics Using ODS](#).”

Global Plot Option

A *global-plot-option* applies to all plots for which the option is available unless it is altered by a specific *plot-option*. You can specify the following *global-plot-options*:

ONLY

suppresses the default plots and requests only the plots that are specified as *plot-requests*.

NBINS=*nbin1* < *nbin2*>

specifies the number of bins for the heat map of the observation weights in the fit plot. The number of bins also depends on the value of the `SHAPE=` option:

- If `SHAPE=RECTANGULAR`, the number of bins is calculated as follows:
 - If you specify only one number, *nbin1*, then it is used for both the horizontal and vertical axes. For example, if you specify `NBINS=10`, then PROC SURVEYREG creates 100 bins (10×10).
 - If you specify two numbers, then *nbin1* is used for the horizontal axis and *nbin2* is used for the vertical axis. For example, if you specify `NBINS=10 20`, then PROC SURVEYREG creates 200 bins (10×20).
- If you specify `SHAPE=HEXAGONAL`, then PROC SURVEYREG calculates the number of rectangular bins by the method previously described. Then the procedure creates a heat map that has hexagonal bins of approximately the same size as those rectangular bins.

If you specify this option, then by default `WEIGHT=HEATMAP`.

If you do not specify this option, then the number of bins is determined by first using the algorithm that is discussed in the section “[ODS Graphics](#)” on page 5392 in Chapter 72, “[The KDE Procedure](#),” and then multiplying the resulting numbers of bins by three.

WEIGHT=BUBBLE | HEATMAP

requests either a bubble plot or a heat map of the data as an overlay on the regression line and confidence limits band of the prediction in a *fit plot*. You can specify the following options:

BUBBLE	overlays a bubble plot in which the bubble area is proportional to the weight of an observation.
HEATMAP	overlays a heat map in which the heat color represents the sum of the weights at the corresponding location.

If you specify the NBINS= option, then by default WEIGHT=HEATMAP.

If you do not specify this option, then the default plot depends on the number of observations in your data. For a data set that contains 100 observations or less, the default is WEIGHT=BUBBLE. For a data set that contains more than 100 observations, the default is WEIGHT=HEATMAP.

Plot Requests

You can specify the following *plot-requests*:

ALL

requests all appropriate plots.

FIT < (plot-options) >

requests a plot that displays the model fitting for a model that depends on at most one regressor, excluding the intercept. The plot is either a bubble plot or a heat map that is overlaid with the regression line and confidence band of the prediction.

The **FIT** plot request has the following *plot-options*:

NBINS=*nbin1* < *nbin2* >

specifies the number of bins for the heat map of the observation weights in the fit plot. The number of bins also depends on the value of the SHAPE= option:

- If SHAPE=RECTANGULAR, the number of bins is calculated as follows:
 - If you specify only one number, *nbin1*, then it is used for both the horizontal and vertical axes. For example, if you specify NBINS=10, then PROC SURVEYREG creates 100 bins (10×10).
 - If you specify two numbers, then *nbin1* is used for the horizontal axis and *nbin2* is used for the vertical axis. For example, if you specify NBINS=10 20, then PROC SURVEYREG creates 200 bins (10×20).
- If you specify SHAPE=HEXAGONAL, then PROC SURVEYREG calculates the number of rectangular bins by the method previously described. Then the procedure creates a heat map that has hexagonal bins of approximately the same size as those rectangular bins.

If you specify this option, then by default WEIGHT=HEATMAP.

If you do not specify this option, then the number of bins is determined by first using the algorithm that is discussed in the section “*ODS Graphics*” on page 5392 in Chapter 72, “*The KDE Procedure*,” and then multiplying the resulting numbers of bins by three.

WEIGHT=BUBBLE | HEATMAP

requests either a bubble plot or a heat map of the data as an overlay on the regression line and confidence limits band of the prediction in a *fit plot*. You can specify the following options:

- BUBBLE** overlays a bubble plot in which the bubble area is proportional to the weight of an observation.
- HEATMAP** overlays a heat map in which the heat color represents the sum of the weights at the corresponding location.

If you specify the `NBINS=` option, then by default `WEIGHT=HEATMAP`.

If you do not specify this option, then the default plot depends on the number of observations in your data. For a data set that contains 100 observations or less, the default is `WEIGHT=BUBBLE`. For a data set that contains more than 100 observations, the default is `WEIGHT=HEATMAP`.

SHAPE=RECTANGULAR | HEXAGONAL**SHAPE=REC | HEX**

requests either rectangular or hexagonal bins for a heat map of the data. Thus, this option implies `WEIGHT=HEATMAP` by default. By default, `SHAPE=RECTANGULAR`.

NONE

suppresses all plots.

RATE=value | SAS-data-set**R=value | SAS-data-set**

specifies the sampling rate, which PROC SURVEYREG uses to compute a finite population correction for Taylor series or bootstrap variance estimation. This option is ignored for the jackknife or balanced repeated replication (BRR) variance estimation method.

If your sample design has multiple stages, you should specify the *first-stage sampling rate*, which is the ratio of the number of primary sampling units (PSUs) in the sample to the total number of PSUs in the population.

You can specify the sampling rate in either of the following ways:

- value* specifies a nonnegative number to use for a nonstratified design or for a stratified design that has the same sampling rate in each stratum.
- SAS-data-set* specifies a *SAS-data-set* that contains the stratification variables and the sampling rates for a stratified design that has different sampling rates in the strata. You must provide the sampling rates in the data set variable named `_RATE_`. The sampling rates must be nonnegative numbers.

You can specify sampling rates as numbers between 0 and 1. Or you can specify sampling rates in percentage form as numbers between 1 and 100, which PROC SURVEYREG converts to proportions. The procedure treats the value 1 as 100% instead of 1%.

For more information, see the section “[Specification of Population Totals and Sampling Rates](#)” on page 10120.

If you do not specify either the `RATE=` or `TOTAL=` option, the Taylor series or bootstrap variance estimation does not include a finite population correction. You cannot specify both the `RATE=` and `TOTAL=` options.

TOTAL=*value* | *SAS-data-set*

N=*value* | *SAS-data-set*

specifies the total number of primary sampling units (PSUs) in the study population. PROC SURVEYREG uses this information to compute a finite population correction for Taylor series or bootstrap variance estimation. This option is ignored for the jackknife or BRR variance estimation method.

You can specify the total number of PSUs in either of the following ways:

value specifies a positive number to use for a nonstratified design or for a stratified design that has the same population total in each stratum.

SAS-data-set specifies a *SAS-data-set* that contains the stratification variables and the population totals for a stratified design that has different population totals in the strata. You must provide the stratum totals in the data set variable named `_TOTAL_`. The stratum totals must be positive numbers.

For more information, see the section “[Specification of Population Totals and Sampling Rates](#)” on page 10120.

If you do not specify either the `TOTAL=` or `RATE=` option, the Taylor series or bootstrap variance estimation does not include a finite population correction. You cannot specify both the `TOTAL=` and `RATE=` options.

TRUNCATE

specifies that class levels should be determined using no more than the first 16 characters of the formatted values of the `CLASS`, `STRATA`, and `CLUSTER` variables. When formatted values are longer than 16 characters, you can use this option in order to revert to the levels as determined in releases before SAS 9.

VARMETHOD=*method* <(method-options)>

specifies the variance estimation *method*. PROC SURVEYREG provides the Taylor series method and the following replication (resampling) methods: balanced repeated replication (BRR), bootstrap, and jackknife.

[Table 122.3](#) summarizes the available *methods* and *method-options*.

Table 122.3 Variance Estimation Methods

<i>method</i>	Variance Estimation Method	<i>method-options</i>
BOOTSTRAP	Bootstrap	CENTER= MH= <i>value</i> SAS-data-set OUTWEIGHTS=SAS-data-set REPS= <i>number</i> SEED= <i>number</i>
BRR	Balanced repeated replication	CENTER= FAY <= <i>value</i> > HADAMARD=SAS-data-set OUTWEIGHTS=SAS-data-set PRINTH REPS= <i>number</i>
JACKKNIFE JK	Jackknife	CENTER= OUTJKCOEFS=SAS-data-set OUTWEIGHTS=SAS-data-set
TAYLOR	Taylor series linearization	None

For VARMETHOD=BOOTSTRAP, VARMETHOD=BRR, and VARMETHOD=JACKKNIFE, you can specify *method-options* in parentheses after the variance estimation *method*. For example:

```
varmethod=BRR(reps=60 outweights=myReplicateWeights)
```

By default, VARMETHOD=JACKKNIFE if you also specify a REPWEIGHTS statement; otherwise, VARMETHOD=TAYLOR by default.

You can specify the following *methods*:

BOOTSTRAP <(method-options)>

requests variance estimation by the bootstrap method. For more information, see the section “Bootstrap Method” on page 10126.

The bootstrap method requires at least two primary sampling units (PSUs) in each stratum for stratified designs unless you use a REPWEIGHTS statement to provide replicate weights.

You can specify the following *method-options*:

CENTER=FULLSAMPLE | REPLICATES

defines how to compute the deviations for the bootstrap method. You can specify the following values:

FULLSAMPLE computes the deviations of the replicate estimates from the full sample estimate.

REPLICATES computes the deviations of the replicate estimates from the average of the replicate estimates.

By default, CENTER=FULLSAMPLE. For more information, see the section “[Bootstrap Method](#)” on page 10126.

MH=value | (values) | SAS-data-set

specifies the number of PSUs to select for the bootstrap replicate samples. You can provide bootstrap stratum sample sizes m_h by specifying a list of *values* or a *SAS-data-set*. Alternatively, you can provide a single bootstrap sample size *value* to use for all strata or for a nonstratified design. You can specify the number of replicate samples in the REPS= option. For more information, see the section “[Bootstrap Method](#)” on page 10126.

Each bootstrap sample size m_h must be a positive integer and must be less than n_h , which is the total number of PSUs in stratum h . By default, $m_h = n_h - 1$ for a stratified design. For a nonstratified design, the bootstrap sample size *value* must be less than n (the total number of PSUs in the sample). By default, $m = n - 1$ for a nonstratified design.

You can provide bootstrap sample sizes by specifying one of the following forms:

MH=value

specifies a single bootstrap sample size *value* to use for all strata or for a nonstratified design.

MH=(values)

specifies a list of stratum bootstrap sample size *values*. You can separate the values with blanks or commas, and you must enclose the list of values in parentheses. The number of values must not be less than the number of strata in the DATA= input data set.

Each stratum sample size value must be a positive integer and must be less than the total number of PSUs in the corresponding stratum.

MH=SAS-data-set

names a *SAS-data-set* that contains the stratum bootstrap sample sizes. You must provide the sample sizes in a data set variable named _NSIZE_ or SampleSize.

The *SAS-data-set* must contain all stratification variables that you specify in the STRATA statement. It must also contain all stratum levels that appear in the DATA= input data set. If formats are associated with the STRATA variables, the formats must be consistent in the two data sets.

Each value of the _NSIZE_ or SampleSize variable must be a positive integer and must be less than the total number of PSUs in the corresponding stratum.

OUTWEIGHTS=SAS-data-set

names a *SAS-data-set* in which to store the bootstrap replicate weights that PROC SURVEYREG creates. For information about replicate weights, see the section “[Bootstrap Method](#)” on page 10126. For information about the contents of the OUTWEIGHTS= data set, see the section “[Replicate Weights Output Data Set](#)” on page 10136.

This *method-option* is not available when you provide replicate weights in a REPWEIGHTS statement.

REPS=number

specifies the *number* of replicates for bootstrap variance estimation. The value of *number* must be an integer greater than 1. Increasing the number of replicates improves the estimation precision but also increases the computation time. By default, REPS=250.

SEED=number

specifies the initial seed for random number generation for bootstrap replicate sampling.

If you do not specify this option or if you specify a *number* that is negative or 0, PROC SURVEYREG uses the time of day from the system clock to obtain an initial seed.

To reproduce the same bootstrap replicate weights and the same analysis in a subsequent execution of PROC SURVEYREG, you can specify the same initial seed that was used in the original analysis.

PROC SURVEYREG displays the value of the initial seed in the “Variance Estimation” table.

BRR <(method-options)>

requests variance estimation by balanced repeated replication (BRR). This method requires a stratified sample design where each stratum contains two primary sampling units (PSUs). When you specify this method, you must also specify a **STRATA** statement unless you provide replicate weights by using the **REPWEIGHTS** statement. For more information, see the section “[Balanced Repeated Replication \(BRR\) Method](#)” on page 10128.

You can specify the following *method-options*:

CENTER=FULLSAMPLE | REPLICATES

defines how to compute the deviations for the bootstrap method. You can specify the following values:

- | | |
|-------------------|---|
| FULLSAMPLE | computes the deviations of the replicate estimates from the full sample estimate. |
| REPLICATES | computes the deviations of the replicate estimates from the average of the replicate estimates. |

By default, CENTER=FULLSAMPLE. For more information, see the section “[Balanced Repeated Replication \(BRR\) Method](#)” on page 10128.

FAY <=value>

requests Fay’s method, which is a modification of the BRR method. For more information, see the section “[Fay’s BRR Method](#)” on page 10129.

You can specify the *value* of the Fay coefficient, which is used in converting the original sampling weights to replicate weights. The Fay coefficient must be a nonnegative number less than 1. By default, the Fay coefficient is 0.5.

HADAMARD=SAS-data-set**H=SAS-data-set**

names a *SAS-data-set* that contains the Hadamard matrix for BRR replicate construction. If you do not specify this *method-option*, PROC SURVEYREG generates an appropriate Hadamard matrix for replicate construction. For more information, see the sections “Balanced Repeated Replication (BRR) Method” on page 10128 and “Hadamard Matrix” on page 10132.

If a Hadamard matrix of a particular dimension exists, it is not necessarily unique. Therefore, if you want to use a specific Hadamard matrix, you must provide the matrix as a *SAS-data-set* in this *method-option*.

In this *SAS-data-set*, each variable corresponds to a column and each observation corresponds to a row of the Hadamard matrix. You can use any variable names in this data set. All values in the data set must equal either 1 or -1 . You must ensure that the matrix you provide is indeed a Hadamard matrix—that is, $\mathbf{A}'\mathbf{A} = R\mathbf{I}$, where \mathbf{A} is the Hadamard matrix of dimension R and \mathbf{I} is an identity matrix. PROC SURVEYREG does not check the validity of the Hadamard matrix that you provide.

The *SAS-data-set* must contain at least H variables, where H denotes the number of first-stage strata in your design. If the data set contains more than H variables, PROC SURVEYREG uses only the first H variables. Similarly, this data set must contain at least H observations.

If you do not specify the **REPS=** *method-option*, the number of replicates is assumed to be the number of observations in the *SAS-data-set*. If you specify the number of replicates—for example, **REPS=nreps**—the first $nreps$ observations in the *SAS-data-set* are used to construct the replicates.

You can specify the **PRINTH** *method-option* to display the Hadamard matrix that PROC SURVEYREG uses to construct replicates for BRR.

OUTWEIGHTS=SAS-data-set

names a *SAS-data-set* in which to store the replicate weights that PROC SURVEYREG creates for BRR variance estimation. For information about replicate weights, see the section “Balanced Repeated Replication (BRR) Method” on page 10128. For information about the contents of the OUTWEIGHTS= data set, see the section “Replicate Weights Output Data Set” on page 10136.

This *method-option* is not available when you provide replicate weights in a **REPWEIGHTS** statement.

PRINTH

displays the Hadamard matrix that PROC SURVEYREG uses to construct replicates for BRR variance estimation. When you provide the Hadamard matrix in the **HADAMARD=** *method-option*, PROC SURVEYREG displays only the rows and columns that are actually used to construct replicates. For more information, see the sections “Balanced Repeated Replication (BRR) Method” on page 10128 and “Hadamard Matrix” on page 10132.

The **PRINTH** *method-option* is not available when you provide replicate weights in a **REPWEIGHTS** statement because the procedure does not use a Hadamard matrix in this case.

REPS=number

specifies the *number* of replicates for BRR variance estimation. The value of *number* must be an integer greater than 1.

If you do not use the **HADAMARD= method-option** to provide a Hadamard matrix, the number of replicates should be greater than the number of strata and should be a multiple of 4. For more information, see the section “[Balanced Repeated Replication \(BRR\) Method](#)” on page 10128. If PROC SURVEYREG cannot construct a Hadamard matrix for the REPS= value that you specify, the value is increased until a Hadamard matrix of that dimension can be constructed. Therefore, the actual number of replicates that PROC SURVEYREG uses might be larger than *number*.

If you use the **HADAMARD= method-option** to provide a Hadamard matrix, the value of *number* must not be greater than the number of rows in the Hadamard matrix. If you provide a Hadamard matrix and do not specify the REPS= *method-option*, the number of replicates is the number of rows in the Hadamard matrix.

If you do not specify the REPS= or the **HADAMARD= method-option** and do not use a **REPWEIGHTS** statement, the number of replicates is the smallest multiple of 4 that is greater than the number of strata.

If you use a **REPWEIGHTS** statement to provide replicate weights, PROC SURVEYREG does not use the REPS= *method-option*; the number of replicates is the number of REPWEIGHTS variables.

JACKKNIFE <(method-options)>**JK <(method-options)>**

requests variance estimation by the delete-1 jackknife method. For more information, see the section “[Jackknife Method](#)” on page 10130. If you use a **REPWEIGHTS** statement to provide replicate weights, **VARMETHOD=JACKKNIFE** is the default variance estimation method.

The delete-1 jackknife method requires at least two primary sampling units (PSUs) in each stratum for stratified designs unless you use a **REPWEIGHTS** statement to provide replicate weights.

You can specify the following *method-options*:

CENTER=FULLSAMPLE | REPLICATES

defines how to compute the deviations for the bootstrap method. You can specify the following values:

FULLSAMPLE	computes the deviations of the replicate estimates from the full sample estimate.
REPLICATES	computes the deviations of the replicate estimates from the average of the replicate estimates.

By default, CENTER=FULLSAMPLE. For more information, see the section “[Jackknife Method](#)” on page 10130.

OUTJKCOEFS=SAS-data-set

names a *SAS-data-set* in which to store the jackknife coefficients. For information about jackknife coefficients, see the section “[Jackknife Method](#)” on page 10130. For information about the contents of the OUTJKCOEFS= data set, see the section “[Jackknife Coefficients Output Data Set](#)” on page 10136.

OUTWEIGHTS=SAS-data-set

names a *SAS-data-set* in which to store the replicate weights that PROC SURVEYREG creates for jackknife variance estimation. For information about replicate weights, see the section “[Jackknife Method](#)” on page 10130. For information about the contents of the OUTWEIGHTS= data set, see the section “[Replicate Weights Output Data Set](#)” on page 10136.

This *method-option* is not available when you use a [REPWEIGHTS](#) statement to provide replicate weights.

TAYLOR

requests Taylor series variance estimation. This is the default method if you do not specify the [VARMETHOD=](#) option or a [REPWEIGHTS](#) statement. For more information, see the section “[Taylor Series \(Linearization\)](#)” on page 10125.

BY Statement

BY *variables* ;

You can specify a BY statement in PROC SURVEYREG to obtain separate analyses of observations in groups that are defined by the BY variables. When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables. If you specify more than one BY statement, only the last one specified is used.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data by using the SORT procedure with a similar BY statement.
- Specify the NOTSORTED or DESCENDING option in the BY statement in the SURVEYREG procedure. The NOTSORTED option does not mean that the data are unsorted but rather that the data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.
- Create an index on the BY variables by using the DATASETS procedure (in Base SAS software).

Note that using a BY statement provides completely separate analyses of the BY groups. It does not provide a statistically valid domain (subpopulation) analysis, where the total number of units in the subpopulation is not known with certainty. You should use the DOMAIN statement to obtain domain analysis. For more information about subpopulation analysis for sample survey data, see Cochran (1977).

For more information about BY-group processing, see the discussion in *SAS Language Reference: Concepts*. For more information about the DATASETS procedure, see the discussion in the *Base SAS Procedures Guide*.

CLASS Statement

```
CLASS variable <(REF= option)> ... <variable <(REF= option)>> </ global-options > ;
```

The CLASS statement names the classification variables to be used in the model. Typical classification variables are Treatment, Sex, Race, Group, and Replication. If you use the CLASS statement, it must appear before the MODEL statement.

Classification variables can be either character or numeric. By default, class levels are determined from the entire set of formatted values of the CLASS variables.

NOTE: Prior to SAS 9, class levels were determined by using no more than the first 16 characters of the formatted values. To revert to this previous behavior, you can use the TRUNCATE option in the PROC SURVEYREG statement.

In any case, you can use formats to group values into levels. See the discussion of the FORMAT procedure in the *Base SAS Procedures Guide* and the discussions of the FORMAT statement and SAS formats in *SAS Formats and Informats: Reference*. You can adjust the order of CLASS variable levels with the ORDER= option in the PROC SURVEYREG statement.

You can specify the following REF= option to indicate how the levels of an individual classification variable are to be ordered by enclosing it in parentheses after the variable name:

REF= 'level' | FIRST | LAST

specifies a level of the classification variable to be put at the end of the list of levels. This level thus corresponds to the reference level in the usual interpretation of the estimates with PROC SURVEYREG's singular parameterization. You can specify the *level* of the variable to use as the reference level; specify a value that corresponds to the formatted value of the variable if a format is assigned. Alternatively, you can specify REF=FIRST to designate that the first ordered level serve as the reference, or REF=LAST to designate that the last ordered level serve as the reference. To specify that REF=FIRST or REF=LAST be used for all classification variables, use the REF= *global-option* after the slash (/) in the CLASS statement.

You can specify the following *global-options* in the CLASS statement after a slash (/):

REF=FIRST | LAST

specifies a level of all classification variables to be put at the end of the list of levels. This level thus corresponds to the reference level in the usual interpretation of the estimates with PROC SURVEYREG's singular parameterization. Specify REF=FIRST to designate that the first ordered level for each classification variable serve as the reference. Specify REF=LAST to designate that the last ordered level serve as the reference. This option applies to all the variables specified in the CLASS statement. To specify different reference levels for different classification variables, use REF= options for individual variables.

CLUSTER Statement

CLUSTER *variables* ;

The CLUSTER statement names variables that identify the clusters in a clustered sample design. The combinations of categories of CLUSTER variables define the clusters in the sample. If there is a STRATA statement, clusters are nested within strata.

If you provide replicate weights for BRR or jackknife variance estimation with the REPWEIGHTS statement, you do not need to specify a CLUSTER statement.

If your sample design has clustering at multiple stages, you should identify only the first-stage clusters (primary sampling units (PSUs)), in the CLUSTER statement. See the section “Primary Sampling Units (PSUs)” on page 10121 for more information.

The CLUSTER *variables* are one or more variables in the DATA= input data set. These variables can be either character or numeric. The formatted values of the CLUSTER variables determine the CLUSTER variable levels. Thus, you can use formats to group values into levels. See the FORMAT procedure in the *Base SAS Procedures Guide* and the FORMAT statement and SAS formats in *SAS Formats and Informats: Reference* for more information.

When determining levels of a CLUSTER variable, an observation with missing values for this CLUSTER variable is excluded, unless you specify the MISSING option. For more information, see the section “Missing Values” on page 10119.

You can use multiple CLUSTER statements to specify cluster variables. The procedure uses variables from all CLUSTER statements to create clusters.

Prior to SAS 9, clusters were determined by using no more than the first 16 characters of the formatted values. If you want to revert to this previous behavior, you can use the TRUNCATE option in the PROC SURVEYREG statement.

CONTRAST Statement

CONTRAST *'label' effect values* </ options > ;

CONTRAST *'label' effect values* < . . . *effect values* > </ options > ;

The CONTRAST statement provides custom hypothesis tests for linear combinations of the regression parameters $H_0: \mathbf{L}\boldsymbol{\beta} = \mathbf{0}$, where \mathbf{L} is the vector or matrix you specify and $\boldsymbol{\beta}$ is the vector of regression parameters. Thus, to use this feature, you must be familiar with the details of the model parameterization used by PROC SURVEYREG. For information about the parameterization, see the section “GLM Parameterization of Classification Variables and Effects” on page 390 in Chapter 19, “Shared Concepts and Topics.”

Each term in the MODEL statement, called an *effect*, is a variable or a combination of variables. You can specify an effect with a variable name or a special notation by using variable names and operators. For more details about how to specify an effect, see the section “Specification of Effects” on page 4083 in Chapter 52, “The GLM Procedure.”

For each CONTRAST statement, PROC SURVEYREG computes Wald’s F test. The procedure displays this value with the degrees of freedom, and identifies it with the contrast label. The numerator degrees of freedom

for Wald's F test equal rank(\mathbf{L}). The denominator degrees of freedom equal the number of clusters (or the number of observations if there is no **CLUSTER** statement) minus the number of strata. Alternatively, you can use the **DF=** option in the **MODEL** statement to specify the denominator degrees of freedom.

You can specify any number of **CONTRAST** statements, but they must appear after the **MODEL** statement.

In the **CONTRAST** statement,

<i>label</i>	identifies the contrast in the output. A label is required for every contrast specified. Labels must be enclosed in single quotes.
<i>effect</i>	identifies an effect that appears in the MODEL statement. You can use the INTERCEPT keyword as an effect when an intercept is fitted in the model. You do not need to include all effects that are in the MODEL statement.
<i>values</i>	are constants that are elements of \mathbf{L} associated with the effect.

You can specify the following *options* in the **CONTRAST** statement after a slash (/):

E
displays the entire coefficient \mathbf{L} vector or matrix.

NOFILL
requests no filling in higher-order effects. When you specify only certain portions of \mathbf{L} , by default **PROC SURVEYREG** constructs the remaining elements from the context. (For more information, see the section “[Specification of ESTIMATE Expressions](#)” on page 4103 in Chapter 52, “[The GLM Procedure](#).”)

When you specify the **NOFILL** option, **PROC SURVEYREG** does not construct the remaining portions and treats the vector or matrix \mathbf{L} as it is defined in the **CONTRAST** statement.

SINGULAR=value
tunes the estimability checking. If \mathbf{v} is a vector, define $\text{ABS}(\mathbf{v})$ to be the largest absolute value of the elements of \mathbf{v} . For a row vector \mathbf{l} of the matrix \mathbf{L} , define

$$c = \begin{cases} \text{ABS}(\mathbf{l}) & \text{if } \text{ABS}(\mathbf{l}) > 0 \\ 1 & \text{otherwise} \end{cases}$$

If $\text{ABS}(\mathbf{l} - \mathbf{H}\mathbf{h})$ is greater than $c \cdot \text{value}$, then $\mathbf{l}\boldsymbol{\beta}$ is declared nonestimable. Here, \mathbf{H} is the matrix $(\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\mathbf{X}$. The *value* must be between 0 and 1; the default is 10^{-7} .

As stated previously, the **CONTRAST** statement enables you to perform hypothesis tests $H_0: \mathbf{L}\boldsymbol{\beta} = 0$.

If the \mathbf{L} matrix contains more than one contrast, then you can separate the rows of the \mathbf{L} matrix with commas.

For example, for the model

```
proc surveyreg;
  class A B;
  model Y=A B;
run;
```

with A at 5 levels and B at 2 levels, the parameter vector is

$$(\mu \ \alpha_1 \ \alpha_2 \ \alpha_3 \ \alpha_4 \ \alpha_5 \ \beta_1 \ \beta_2)$$

To test the hypothesis that the pooled A linear and A quadratic effect is zero, you can use the following L matrix:

$$\mathbf{L} = \begin{bmatrix} 0 & -2 & -1 & 0 & 1 & 2 & 0 & 0 \\ 0 & 2 & -1 & -2 & -1 & 2 & 0 & 0 \end{bmatrix}$$

The corresponding CONTRAST statement is

```
contrast 'A Linear & Quadratic'
  a -2 -1 0 1 2,
  a 2 -1 -2 -1 2;
```

DOMAIN Statement

DOMAIN *variables* < *variable*variable variable*variable*variable ...* >;

The DOMAIN statement requests analysis for domains (subpopulations) in addition to analysis for the entire study population. The DOMAIN statement names the *variables* that identify domains, which are called domain variables.

A domain variable can be either character or numeric. The procedure treats domain variables as categorical variables. If a *variable* appears by itself in a DOMAIN statement, each level of this variable determines a domain in the study population. If two or more *variables* are joined by asterisks (*), then every possible combination of levels of these variables determines a domain. The procedure performs a descriptive analysis within each domain that is defined by the domain variables.

The formatted values of the domain variables determine the categorical variable levels. Thus, you can use formats to group values into levels. For more information, see the FORMAT procedure in *Base SAS Procedures Guide* and the FORMAT statement and SAS formats in *SAS Formats and Informats: Reference*.

When determining levels of a DOMAIN variable, an observation with missing values for this DOMAIN variable is excluded, unless you specify the MISSING option. For more information, see the section “Missing Values” on page 10119.

It is common practice to compute statistics for domains. Because formation of these domains might be unrelated to the sample design, the sample sizes for the domains are random variables. Use a DOMAIN statement to incorporate this variability into the variance estimation.

A DOMAIN statement is different from a BY statement. In a BY statement, you treat the sample sizes as fixed in each subpopulation, and you perform analysis within each BY group independently. For more information, see the section “Domain Analysis” on page 10134. Similarly, you should use a DOMAIN statement to perform a domain analysis over the entire data set. Creating a new data set from a single domain and analyzing that with PROC SURVEYREG yields inappropriate estimates of variance.

By default, the SURVEYREG procedure displays analyses for all levels of domains that are formed by the variables in a DOMAIN statement. Optionally, you can specify particular levels of each DOMAIN variable to be displayed by listing quoted *formatted-level-values* in parentheses after each variable name. You must enclose each *formatted-level-value* in single or double quotation marks. You can specify one or more levels of each variable; when you specify more than one level, separate the levels by a space or a comma. These examples illustrate the syntax:

```
domain Race*Gender('Female');
domain Race('White', 'Asian') Gender;
```

For example, `Race*Gender("Female")` requests that the procedure display analysis only for females within each race category, and `Race('White', 'Asian')` requests that the procedure display domain analysis only for people whose race is either white or Asian.

Specifying the same domain multiple times but with different levels for each corresponding domain variables is equivalent to specifying the union of different levels for the same variables. However, if you do not specify levels for a variable in a domain that is specified multiple times, only the specified levels are rendered. For example, the following two specifications together

```
domain Race('White')*Gender('Female');
domain Race('Asian')*Gender;
```

have the same effect as a single specification:

```
domain Race('White' 'Asian')*Gender('Female');
```

Also, the following specification

```
domain Race('White')*Gender Race('Asian')*Gender;
```

is equivalent to

```
domain Race('White' 'Asian')*Gender;
```

This syntax controls only the display of domain analysis results; it does not subset the data set, change the degrees of freedom, or otherwise affect the variance estimation.

EFFECT Statement

EFFECT *name=effect-type (variables </ options>);*

The EFFECT statement enables you to construct special collections of columns for design matrices. These collections are referred to as *constructed effects* to distinguish them from the usual model effects that are formed from continuous or classification variables, as discussed in the section “GLM Parameterization of Classification Variables and Effects” on page 390 in Chapter 19, “Shared Concepts and Topics.”

You can specify the following *effect-types*:

COLLECTION	specifies a collection effect that defines one or more variables as a single effect that has multiple degrees of freedom. The variables in a collection are considered as a unit for purposes of estimation and inference.
MULTIMEMBER MM	specifies a multimember classification effect whose levels are determined by one or more variables that appear in a CLASS statement.
POLYNOMIAL POLY	specifies a multivariate polynomial effect in the specified numeric variables.
SPLINE	specifies a regression spline effect whose columns are univariate spline expansions of one or more variables. A spline expansion replaces the original variable with an expanded or larger set of new variables.

For more information about the syntax of these *effect-types* and how columns of constructed effects are computed, see the section “EFFECT Statement” on page 400 in Chapter 19, “Shared Concepts and Topics.”

ESTIMATE Statement

```
ESTIMATE <'label' > estimate-specification <(divisor=n) >
    < , ... <'label' > estimate-specification <(divisor=n) > >
    </ options > ;
```

The ESTIMATE statement provides a mechanism for obtaining custom hypothesis tests. Estimates are formed as linear estimable functions of the form $L\beta$. You can perform hypothesis tests for the estimable functions, construct confidence limits, and obtain specific nonlinear transformations.

Table 122.4 summarizes the *options* available in the ESTIMATE statement.

Table 122.4 ESTIMATE Statement Options

Option	Description
Construction and Computation of Estimable Functions	
DIVISOR=	Specifies a list of values to divide the coefficients
NOFILL	Suppresses the automatic fill-in of coefficients for higher-order effects
SINGULAR=	Tunes the estimability checking difference
Degrees of Freedom and <i>p</i>-Values	
ADJUST=	Determines the method of multiple comparison adjustment of estimates
ALPHA= α	Determines the confidence level $(1 - \alpha)$
LOWER	Performs one-sided, lower-tailed inference
STEPPDOWN	Adjusts multiplicity-corrected <i>p</i> -values further in a step-down fashion
TESTVALUE=	Specifies values under the null hypothesis for tests
UPPER	Performs one-sided, upper-tailed inference
Statistical Output	
CL	Constructs confidence limits
CORR	Displays the correlation matrix of estimates
COV	Displays the covariance matrix of estimates
E	Prints the L matrix
JOINT	Produces a joint <i>F</i> or chi-square test for the estimable functions
PLOTS=	Produces ODS statistical graphics if the analysis is sampling-based
SEED=	Specifies the seed for computations that depend on random numbers
Generalized Linear Modeling	
CATEGORY=	Specifies how to construct estimable functions for multinomial data
EXP	Exponentiates and displays estimates
ILINK	Computes and displays estimates and standard errors on the inverse linked scale

For more information about the syntax of the ESTIMATE statement, see the section “ESTIMATE Statement” on page 448 in Chapter 19, “Shared Concepts and Topics.”

LSMEANS Statement

LSMEANS < *model-effects* > < / *options* > ;

The LSMEANS statement computes and compares least squares means (LS-means) of fixed effects. LS-means are *predicted margins*—that is, they estimate the marginal means over a hypothetical balanced population.

Table 122.5 summarizes available *options* in the LSMEANS statement.

Table 122.5 LSMEANS Statement Options

Option	Description
Construction and Computation of LS-Means	
AT	Modifies the covariate value in computing LS-means
BYLEVEL	Computes separate margins
DIFF	Computes differences of LS-means
OM=	Specifies the weighting scheme for LS-means computation as determined by the input data set
SINGULAR=	Tunes estimability checking
Degrees of Freedom and <i>p</i>-Values	
ADJUST=	Determines the method of multiple-comparison adjustment of LS-means differences
ALPHA= α	Determines the confidence level ($1 - \alpha$)
STEPDOWN	Adjusts multiple-comparison <i>p</i> -values further in a step-down fashion
Statistical Output	
CL	Constructs confidence limits for means and mean differences
CORR	Displays the correlation matrix of LS-means
COV	Displays the covariance matrix of LS-means
E	Prints the L matrix
LINES	Uses connecting lines to indicate nonsignificantly different subsets of LS-means
LINESTABLE	Displays the results of the LINES option as a table
MEANS	Prints the LS-means
PLOTS=	Produces graphs of means and mean comparisons
SEED=	Specifies the seed for computations that depend on random numbers

Table 122.5 *continued*

Option	Description
Generalized Linear Modeling	
EXP	Exponentiates and displays estimates of LS-means or LS-means differences
ILINK	Computes and displays estimates and standard errors of LS-means (but not differences) on the inverse linked scale
ODDSRATIO	Reports (simple) differences of least squares means in terms of odds ratios if permitted by the link function

For details about the syntax of the LSMEANS statement, see the section “LSMEANS Statement” on page 465 in Chapter 19, “Shared Concepts and Topics.”

LSMESTIMATE Statement

```
LSMESTIMATE model-effect <'label'> values <divisor=n>
              < , ... <'label'> values <divisor=n> >
              </ options > ;
```

The LSMESTIMATE statement provides a mechanism for obtaining custom hypothesis tests among least squares means.

Table 122.6 summarizes the *options* available in the LSMESTIMATE statement.

Table 122.6 LSMESTIMATE Statement Options

Option	Description
Construction and Computation of LS-Means	
AT	Modifies covariate values in computing LS-means
BYLEVEL	Computes separate margins
DIVISOR=	Specifies a list of values to divide the coefficients
OM=	Specifies the weighting scheme for LS-means computation as determined by a data set
SINGULAR=	Tunes estimability checking
Degrees of Freedom and <i>p</i>-Values	
ADJUST=	Determines the method of multiple-comparison adjustment of LS-means differences
ALPHA= α	Determines the confidence level ($1 - \alpha$)
LOWER	Performs one-sided, lower-tailed inference
STEPDOWN	Adjusts multiple-comparison <i>p</i> -values further in a step-down fashion
TESTVALUE=	Specifies values under the null hypothesis for tests
UPPER	Performs one-sided, upper-tailed inference

Table 122.6 *continued*

Option	Description
Statistical Output	
CL	Constructs confidence limits for means and mean differences
CORR	Displays the correlation matrix of LS-means
COV	Displays the covariance matrix of LS-means
E	Prints the L matrix
ELSM	Prints the K matrix
JOINT	Produces a joint <i>F</i> or chi-square test for the LS-means and LS-means differences
PLOTS=	Produces graphs of means and mean comparisons
SEED=	Specifies the seed for computations that depend on random numbers
Generalized Linear Modeling	
CATEGORY=	Specifies how to construct estimable functions for multinomial data
EXP	Exponentiates and displays LS-means estimates
ILINK	Computes and displays estimates and standard errors of LS-means (but not differences) on the inverse linked scale

For more information about the syntax of the LSMESTIMATE statement, see the section “LSMESTIMATE Statement” on page 486 in Chapter 19, “Shared Concepts and Topics.”

MODEL Statement

MODEL *dependent* = < effects > < / options > ;

The MODEL statement specifies the dependent (response) variable and the independent (regressor) variables or effects. The dependent variable must be numeric. Each term in a MODEL statement, called an *effect*, is a variable or a combination of variables. You can specify an effect with a variable name or with special notation by using variable names and operators. For more information about how to specify an effect, see the section “Specification of Effects” on page 4083 in Chapter 52, “The GLM Procedure.”

Only one MODEL statement is allowed for each PROC SURVEYREG statement. If you specify more than one MODEL statement, the procedure uses the first model and ignores the rest.

Table 122.7 summarizes the *options* available in the MODEL statement.

Table 122.7 MODEL Statement Options

Option	Description
ADJRSQ	Compute the adjusted multiple R-square
ANOVA	Produces the ANOVA table
CLPARM	Requests confidence limits
COVB	Displays the estimated covariance matrix
DEFF	Displays design effects

Table 122.7 *continued*

Option	Description
DF=	Specifies the denominator degrees of freedom
I	Displays the inverse or the generalized inverse of the $X'X$ matrix
NOINT	Omits the intercept
PARMLABEL	Displays the labels of the parameters
SINGULAR=	Tunes the estimability checking
SOLUTION	Displays parameter estimates
STB	Displays standardized parameter estimates
VADJUST=	Specifies whether to use degrees of freedom adjustment
X	Displays the $X'X$ matrix, or the $X'WX$ matrix

You can specify the following *options* in the MODEL statement after a slash (/):

ADJRSQ

requests the procedure compute the adjusted multiple R-square.

ANOVA

requests the ANOVA table be produced in the output. By default, the ANOVA table is not printed in the output.

CLPARM

requests confidence limits for the parameter estimates. The SURVEYREG procedure determines the confidence coefficient by using the ALPHA= option, which by default equals 0.05 and produces 95% confidence bounds. The CLPARM option also requests confidence limits for all the estimable linear functions of regression parameters in the ESTIMATE statements.

Note that when there is a CLASS statement, you need to use the SOLUTION option with the CLPARM option to obtain the parameter estimates and their confidence limits.

COVB

displays the estimated covariance matrix of the estimated regression estimates.

DEFF

displays design effects for the regression coefficient estimates.

DF=value

specifies the denominator degrees of freedom for the F tests and the degrees of freedom for the t tests. For details about the default denominator degrees of freedom, see the section “Denominator Degrees of Freedom” on page 10132 for details.

I | INVERSE

displays the inverse or the generalized inverse of the $X'X$ matrix. When there is a WEIGHT variable, the procedure displays the inverse or the generalized inverse of the $X'WX$ matrix, where W is the diagonal matrix constructed from WEIGHT variable values.

NOINT

omits the intercept from the model.

PARMLABEL

displays the labels of the parameters in the “Estimated Regression Coefficients” table, if the effect contains a single continuous variable that has a label.

SINGULAR=*value*

tunes the estimability checking. If \mathbf{v} is a vector, define $\text{ABS}(\mathbf{v})$ to be the largest absolute value of the elements of \mathbf{v} . For a row vector \mathbf{l} of the matrix \mathbf{L} , define

$$c = \begin{cases} \text{ABS}(\mathbf{l}) & \text{if } \text{ABS}(\mathbf{l}) > 0 \\ 1 & \text{otherwise} \end{cases}$$

If $\text{ABS}(\mathbf{l} - \mathbf{lH})$ is greater than $c \cdot \text{value}$, then $\mathbf{l}\boldsymbol{\beta}$ is declared nonestimable. Here, \mathbf{H} is the matrix $(\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\mathbf{X}$. The *value* must be between 0 and 1; the default is 10^{-7} .

SOLUTION

displays a solution to the normal equations, which are the parameter estimates. The SOLUTION option is useful only when you use a CLASS statement. If you do not specify a CLASS statement, PROC SURVEYREG displays parameter estimates by default. But if you specify a CLASS statement, PROC SURVEYREG does not display parameter estimates unless you also specify the SOLUTION option.

STB

produces standardized regression coefficients. A standardized regression coefficient is computed by dividing a parameter estimate by the ratio of the sample standard deviation of the dependent variable to the sample standard deviation of the regressor.

VADJUST=DF | NONE

specifies whether to use degrees of freedom adjustment $(n - 1)/(n - p)$ in the computation of the matrix \mathbf{G} for the variance estimation. If you do not specify the VADJUST= option, by default, PROC SURVEYREG uses the degrees-of-freedom adjustment that is equivalent to the VARADJ=DF option. If you do not want to use this variance adjustment, you can specify the VADJUST=NONE option.

X | XPX

displays the $\mathbf{X}'\mathbf{X}$ matrix, or the $\mathbf{X}'\mathbf{W}\mathbf{X}$ matrix when there is a WEIGHT variable, where \mathbf{W} is the diagonal matrix constructed from WEIGHT variable values. The X option also displays the crossproducts vector $\mathbf{X}'\mathbf{y}$ or $\mathbf{X}'\mathbf{W}\mathbf{y}$.

OUTPUT Statement

```
OUTPUT < OUT=SAS-data-set > < keyword< =variable-name > . . . keyword< =variable-name > >
    < / option > ;
```

The OUTPUT statement creates a new SAS data set that contains all the variables in the input data set and, optionally, the estimated linear predictors and their standard error estimates, the residuals from the linear regression, and the confidence limits for the predictors.

You can specify the following *options* in the OUTPUT statement:

OUT=SAS-data-set

gives the name of the new output data set. By default, the procedure uses the DATA*n* convention to name the new data set.

keyword < =variable-name >

specifies the statistics to include in the output data set and names the new variables that contain the statistics. You can specify a *keyword* for each desired statistic (see the following list of *keywords*). Optionally, you can name a statistic by providing a variable name followed an equal sign to contain the statistic. For example,

```
output out=myOutDataSet p=myPredictor;
```

creates a SAS data set myOutDataSet that contains the predicted values in the variable myPredictor.

The *keywords* allowed and the statistics they represent are as follows:

LCLM L	lower bound of a $100(1 - \alpha)\%$ confidence interval for the expected value (mean) of the predicted value. The α level is equal to the value of the ALPHA= option in the OUTPUT statement or, if this option is not specified, to the ALPHA= option in the PROC SURVEYREG statement. If neither of these options is set, then $\alpha = 0.05$ by default, resulting in the lower bound for a 95% confidence interval. If no variable name is given for this keyword, the default variable name is _LCLM_.
PREDICTED PRED P	predicted values. If no variable name is given for this keyword, the default variable name is _PREDICTED_.
RESIDUAL R	residuals, calculated as ACTUAL – PREDICTED. If no variable name is given for this keyword, the default variable name is _RESIDUAL_.
STDP STD	standard error of the mean predicted value. If no variable name is given for this keyword, the default variable name is _STD_.
UCLM U	upper bound of a $100(1 - \alpha)\%$ confidence interval for the expected value (mean) of the predicted value. The α level is equal to the value of the ALPHA= option in the OUTPUT statement or, if this option is not specified, to the ALPHA= option in the PROC SURVEYREG statement. If neither of these options is set, then $\alpha = 0.05$ by default, resulting in the upper bound for a 95% confidence interval. If no variable name is given for this keyword, the default variable name is _UCLM_.

The following *option* is available in the OUTPUT statement and is specified after a slash (/):

ALPHA= α

specifies the level of significance α for $100(1 - \alpha)\%$ confidence intervals. By default, α is equal to the value of the **ALPHA=** option in the PROC SURVEYREG statement or 0.05 if that option is not specified. You can use values between 0 and 1.

REPWEIGHTS Statement

REPWEIGHTS *variables* *</ options >* ;

The REPWEIGHTS statement names *variables* that provide replicate weights for bootstrap, BRR, or jackknife variance estimation, which you request with the **VARMETHOD=BOOTSTRAP**, **VARMETHOD=BRR**, or **VARMETHOD=JACKKNIFE** option, respectively, in the PROC SURVEYREG statement. For more information about the replication methods, see the section “Variance Estimation” on page 10125.

Each REPWEIGHTS *variable* contains the weights for a single replicate, and the number of replicates equals the number of REPWEIGHTS variables. The REPWEIGHTS variables must be numeric, and the variable values must be nonnegative numbers.

For more information about replicate weights that the SURVEYREG procedure creates, see the sections “Balanced Repeated Replication (BRR) Method” on page 10128 and “Jackknife Method” on page 10130.

If you provide replicate weights with a REPWEIGHTS statement, you do not need to specify a **CLUSTER** or **STRATA** statement. If you use a REPWEIGHTS statement and do not specify the **VARMETHOD=** option in the PROC SURVEYREG statement, the procedure uses **VARMETHOD=JACKKNIFE** by default.

If you specify a REPWEIGHTS statement but do not include a **WEIGHT** statement, the procedure uses the average of replicate weights of each observation as the observation’s weight.

You can specify the following *options* in the REPWEIGHTS statement after a slash (/):

DF=*df*

specifies the degrees of freedom for the analysis. The value of *df* must be a positive number. By default, the value of *df* is the number of REPWEIGHTS variables.

If you know the number of PSUs and the number of strata from which the replicate weights are generated, you should specify the number of PSUs minus the number of strata as the degrees of freedom in this option.

JKCOEFS=*value* | *<(>values <)>* | SAS-data-set

specifies **jackknife coefficients** for the **VARMETHOD=JACKKNIFE** option in the PROC SURVEYREG statement. The jackknife coefficient values must be nonnegative numbers. For more information about jackknife coefficients, see the section “Jackknife Method” on page 10130.

You can provide jackknife coefficients by specifying one of the following forms:

value

specifies a single jackknife coefficient *value* to use for all replicates, where *value* must be a nonnegative number.

values

specifies a list of jackknife coefficients, where each value in the *values* is a nonnegative number that corresponds to a single replicate that is identified by a REPWEIGHTS variable. You can separate the values with blanks or commas, and you can optionally enclose the *values* in parentheses. The number of values in the *values* must equal the number of replicate weight variables that you specify in the REPWEIGHTS statement.

You must list the jackknife coefficient values in the same order in which you list the corresponding replicate weight variables in the REPWEIGHTS statement.

SAS-data-set

names a *SAS-data-set* that contains the jackknife coefficients, where each coefficient value must be a nonnegative number. You must provide the jackknife coefficients in the data set variable named JKCoefficient. Each observation in this data set must correspond to a replicate that is identified by a REPWEIGHTS variable. The number of observations in the *SAS-data-set* must not be less than the number of REPWEIGHTS variables.

REPCOEF*s=value | (>values <)> | SAS-data-set*

specifies replicate coefficients for the **VARMETHOD=BOOTSTRAP** or **VARMETHOD=JACKKNIFE** option in the **PROC SURVEYREG** statement, where each coefficient corresponds to an individual replicate weight that is identified by a REPWEIGHTS variable. The replicate coefficient values must be nonnegative numbers.

You can provide replicate coefficients by specifying one of the following forms:

value

specifies a single replicate coefficient *value* to use for all replicates, where *value* must be a nonnegative number.

values

specifies a list of replicate coefficients, where each value in the *values* is a nonnegative number that corresponds to a single replicate that is identified by a REPWEIGHTS variable. You can separate the values with blanks or commas, and you can optionally enclose the *values* in parentheses. The number of values in the *values* must equal the number of replicate weight variables that you specify in the REPWEIGHTS statement.

You must list the replicate coefficient values in the same order in which you list the corresponding replicate weight variables in the REPWEIGHTS statement.

SAS-data-set

names a *SAS-data-set* that contains the replicate coefficients, where each coefficient value must be a nonnegative number. You must provide the replicate coefficients in the data set variable named JKCoefficient. Each observation in this data set must correspond to a replicate that is identified by a REPWEIGHTS variable. The number of observations in the *SAS-data-set* must not be less than the number of REPWEIGHTS variables.

SLICE Statement

SLICE *model-effect* </ options > ;

The SLICE statement provides a general mechanism for performing a partitioned analysis of the LS-means for an interaction. This analysis is also known as an analysis of simple effects.

This statement uses the same *options* as the LSMEANS statement, which are summarized in Table 19.23 in Chapter 19, “Shared Concepts and Topics.” For more information about the syntax of the SLICE statement, see the section “SLICE Statement” on page 515 in Chapter 19, “Shared Concepts and Topics.”

STORE Statement

STORE < OUT= > *item-store-name* </ LABEL='label' > ;

The STORE statement saves the context and results of the statistical analysis. The resulting item store has a binary file format that cannot be modified. The contents of the item store can be processed using the PLM procedure. For more information about the syntax of the STORE statement, see the section “STORE Statement” on page 519 in Chapter 19, “Shared Concepts and Topics.”

STRATA Statement

STRATA *variables* </ options > ;

The STRATA statement specifies variables that form the strata in a stratified sample design. The combinations of categories of STRATA variables define the strata in the sample.

If your sample design has stratification at multiple stages, you should identify only the first-stage strata in the STRATA statement. See the section “Specification of Population Totals and Sampling Rates” on page 10120 for more information.

If you provide replicate weights for BRR, jackknife, or bootstrap variance estimation by including the REPWEIGHTS statement, you do not need to specify a STRATA statement.

The STRATA *variables* are one or more variables in the DATA= input data set. These variables can be either character or numeric. The formatted values of the STRATA variables determine the levels. Thus, you can use formats to group values into levels. See the FORMAT procedure in the *Base SAS Procedures Guide* and the FORMAT statement and SAS formats in *SAS Formats and Informats: Reference* for more information.

When determining levels of a STRATA variable, an observation with missing values for this STRATA variable is excluded, unless you specify the MISSING option. For more information, see the section “Missing Values” on page 10119.

You can use multiple STRATA statements to specify stratum variables.

You can specify the following *options* in the STRATA statement after a slash (/):

LIST

displays a “Stratum Information” table, which includes values of the STRATA variables and the number of observations, number of clusters, population total, and sampling rate for each stratum. See the section “[Stratum Information](#)” on page 10138 for more details.

NOCOLLAPSE

prevents the procedure from collapsing (combining) strata that have only one sampling unit for the Taylor series variance estimation. By default, the procedure [collapses](#) strata that contain only one sampling unit for the Taylor series method. See the section “[Stratum Collapse](#)” on page 10123 for details.

TEST Statement

TEST < *model-effects* > < / *options* > ;

The TEST statement enables you to perform F tests for model effects that test Type I, Type II, or Type III hypotheses. For more information about constructing Type I, II, and III estimable functions, see Chapter 15, “[The Four Types of Estimable Functions](#).”

Table 122.8 summarizes the *options* available in the TEST statement.

Table 122.8 TEST Statement Options

Option	Description
CHISQ	Requests chi-square tests
DDF=	Specifies denominator degrees of freedom for fixed effects
E	Requests Type I, Type II, and Type III coefficients
E1	Requests Type I coefficients
E2	Requests Type II coefficients
E3	Requests Type III coefficients
HTYPE=	Indicates the type of hypothesis test to perform
INTERCEPT	Adds a row that corresponds to the overall intercept

For more information about the syntax of the TEST statement, see the section “[TEST Statement](#)” on page 521 in Chapter 19, “[Shared Concepts and Topics](#).”

WEIGHT Statement

WEIGHT *variable* ;

The WEIGHT statement names the variable that contains the sampling weights. This variable must be numeric, and the sampling weights must be positive numbers. If an observation has a weight that is nonpositive or missing, then the procedure omits that observation from the analysis. See the section “Missing Values” on page 10119 for more information. If you specify more than one WEIGHT statement, the procedure uses only the first WEIGHT statement and ignores the rest.

If you do not specify a WEIGHT statement but provide replicate weights with a REPWEIGHTS statement, PROC SURVEYREG uses the average of replicate weights of each observation as the observation’s weight.

If you do not specify a WEIGHT statement or a REPWEIGHTS statement, PROC SURVEYREG assigns all observations a weight of one.

Details: SURVEYREG Procedure

Missing Values

If you have missing values in your survey data for any reason, such as nonresponse, this can compromise the quality of your survey results. If the respondents are different from the nonrespondents with regard to a survey effect or outcome, then survey estimates might be biased and cannot accurately represent the survey population. There are a variety of techniques in sample design and survey operations that can reduce nonresponse. After data collection is complete, you can use imputation to replace missing values with acceptable values, and/or you can use sampling weight adjustments to compensate for nonresponse. You should complete this data preparation and adjustment before you analyze your data with PROC SURVEYREG. For more information, see Cochran (1977); Kalton and Kasprzyk (1986); Brick and Kalton (1996).

If an observation has a missing value or a nonpositive value for the WEIGHT variable, then that observation is excluded from the analysis.

An observation is also excluded from the analysis if it has a missing value for any design (STRATA, CLUSTER, or DOMAIN) variable, unless you specify the MISSING option in the PROC SURVEYREG statement. If you specify the MISSING option, the procedure treats missing values as a valid (nonmissing) category for all categorical variables.

By default, if an observation contains missing values for the dependent variable or for any variable used in the independent effects, the observation is excluded from the analysis. This treatment is based on the assumption that the missing values are missing completely at random (MCAR). However, this assumption sometimes is not true. For example, evidence from other surveys might suggest that observations with missing values are systematically different from observations without missing values. If you believe that missing values are not missing completely at random, then you can specify the NOMCAR option to include these observations with missing values in the dependent variable and the independent variables in the variance estimation.

Whether or not you specify the NOMCAR option, the procedure always excludes observations with missing or invalid values for the WEIGHT, STRATA, CLUSTER, and DOMAIN variables, unless you specify the MISSING option.

When you specify the **NOMCAR** option, the procedure treats observations with and without missing values for variables in the regression model as two different domains, and it performs a domain analysis in the domain of nonmissing observations.

If you use a **REPWEIGHTS** statement, all **REPWEIGHTS** variables must contain nonmissing values.

Survey Design Information

Specification of Population Totals and Sampling Rates

To include a finite population correction (*fpc*) in Taylor series or bootstrap variance estimation, you can input either the sampling rate or the population total by using the **RATE=** or **TOTAL=** option, respectively, in the PROC SURVEYREG statement. (You cannot specify both of these options in the same PROC SURVEYREG statement.) The **RATE=** and **TOTAL=** options apply only to Taylor series or bootstrap variance estimation. The procedure does not use a finite population correction for BRR or jackknife variance estimation.

If you do not specify the **RATE=** or **TOTAL=** option, the Taylor series or bootstrap variance estimation does not include a finite population correction. For fairly small sampling fractions, it is appropriate to ignore this correction. For more information, see Cochran (1977) and Kish (1965).

If your design has multiple stages of selection and you are specifying the **RATE=** option, you should input the first-stage sampling rate, which is the ratio of the number of primary sampling units (PSUs) in the sample to the total number of PSUs in the study population. If you are specifying the **TOTAL=** option for a multistage design, you should input the total number of PSUs in the study population. For more information, see the section “Primary Sampling Units (PSUs)” on page 10121.

For a nonstratified sample design, or for a stratified sample design that has the same sampling rate or the same population total in all strata, you can use the **RATE=value** or **TOTAL=value** option. If your sample design is stratified with different sampling rates or population totals in different strata, use the **RATE=SAS-data-set** or **TOTAL=SAS-data-set** option to name a SAS data set that contains the stratum sampling rates or totals. This data set is called a *secondary data set*, as opposed to the *primary data set* that you specify in the **DATA=** option.

The secondary data set must contain all the stratification variables that are listed in the **STRATA** statement and all the variables that are listed in the **BY** statement. If there are formats associated with the **STRATA** variables and the **BY** variables, then the formats must be consistent in the primary and the secondary data sets. If you specify the **TOTAL=SAS-data-set** option, the secondary data set must have a variable named **_TOTAL_** that contains the stratum population totals. Or if you specify the **RATE=SAS-data-set** option, the secondary data set must have a variable named **_RATE_** that contains the stratum sampling rates. If the secondary data set contains more than one observation for any one stratum, then the procedure uses the first value of **_TOTAL_** or **_RATE_** for that stratum and ignores the rest.

The *value* in the **RATE=** option or the values of **_RATE_** in the secondary data set must be nonnegative numbers. You can specify *value* as a number between 0 and 1. Or you can specify *value* in percentage form as a number between 1 and 100, and PROC SURVEYREG converts that number to a proportion. The procedure treats the value 1 as 100% instead of 1%.

If you specify the **TOTAL=value** option, *value* must not be less than the sample size. If you provide stratum population totals in a secondary data set, these values must not be less than the corresponding stratum sample sizes.

Primary Sampling Units (PSUs)

When you have clusters, or primary sampling units (PSUs), in your sample design, the procedure estimates variance from the variation among PSUs when the Taylor series variance method is used. For more information, see the section “Taylor Series (Linearization)” on page 10125.

BRR or jackknife variance estimation methods draw multiple replicates (also called subsamples) from the full sample by following a specific resampling scheme. These subsamples are constructed by deleting PSUs from the full sample.

The bootstrap variance estimation method repeatedly draws a simple random sample with replacement of primary sampling units (PSUs) from the full sample to form each replicate.

If you use a **REPWEIGHTS** statement to provide replicate weights for BRR, jackknife, bootstrap variance estimation, you do not need to specify a **CLUSTER** statement. Otherwise, you should specify a **CLUSTER** statement whenever your design includes clustering at the first stage of sampling. If you do not specify a **CLUSTER** statement, then PROC SURVEYREG treats each observation as a PSU.

Computational Details

Notation

For a stratified clustered sample design, observations are represented by an $n \times (p + 2)$ matrix

$$(\mathbf{w}, \mathbf{y}, \mathbf{X}) = (w_{hij}, y_{hij}, \mathbf{x}_{hij})$$

where

- \mathbf{w} denotes the sampling weight vector
- \mathbf{y} denotes the dependent variable
- \mathbf{X} denotes the $n \times p$ design matrix. (When an effect contains only classification variables, the columns of \mathbf{X} that correspond this effect contain only 0s and 1s; no reparameterization is made.)
- $h = 1, 2, \dots, H$ is the stratum index
- $i = 1, 2, \dots, n_h$ is the cluster index within stratum h
- $j = 1, 2, \dots, m_{hi}$ is the unit index within cluster i of stratum h
- p is the total number of parameters (including an intercept if the INTERCEPT effect is included in the **MODEL** statement)
- $n = \sum_{h=1}^H \sum_{i=1}^{n_h} m_{hi}$ is the total number of observations in the sample

Also, f_h denotes the sampling rate for stratum h . You can use the **TOTAL=** or **RATE=** option to input population totals or sampling rates. See the section “Specification of Population Totals and Sampling Rates” on page 10120 for details. If you input stratum totals, PROC SURVEYREG computes f_h as the ratio of the stratum sample size to the stratum total. If you input stratum sampling rates, PROC SURVEYREG uses these values directly for f_h . If you do not specify the **TOTAL=** or **RATE=** option, then the procedure assumes that the stratum sampling rates f_h are negligible, and a finite population correction is not used when computing variances.

Regression Coefficients

PROC SURVEYREG solves the normal equations $\mathbf{X}'\mathbf{W}\mathbf{X}\boldsymbol{\beta} = \mathbf{X}'\mathbf{W}\mathbf{y}$ by using a modified sweep routine that produces a generalized (g2) inverse $(\mathbf{X}'\mathbf{W}\mathbf{X})^{-}$ and a solution (Pringle and Rayner 1971)

$$\hat{\boldsymbol{\beta}} = (\mathbf{X}'\mathbf{W}\mathbf{X})^{-}\mathbf{X}'\mathbf{W}\mathbf{y}$$

where \mathbf{W} is the diagonal matrix constructed from **WEIGHT** variable values.

For models with **CLASS** variables, there are more design matrix columns than there are degrees of freedom (*df*) for the effect. Thus, there are linear dependencies among the columns. In this case, the parameters are not estimable; there is an infinite number of least squares solutions. PROC SURVEYREG uses a generalized (g2) inverse to obtain values for the estimates. The solution values are not displayed unless you specify the **SOLUTION** option in the **MODEL** statement. The solution has the characteristic that estimates are zero whenever the design column for that parameter is a linear combination of previous columns. (In strict terms, the solution values should not be called estimates.) With this full parameterization, hypothesis tests are constructed to test linear functions of the parameters that are estimable.

Design Effect

If you specify the **DEFF** option in the **MODEL** statement, PROC SURVEYREG calculates the design effects for the regression coefficients. The design effect of an estimate is the ratio of the actual variance to the variance computed under the assumption of simple random sampling:

$$\text{DEFF} = \frac{\text{variance under the sample design}}{\text{variance under simple random sampling}}$$

For more information, see Kish (1965, p. 258).

PROC SURVEYREG computes the numerator as described in the section “**Variance Estimation**” on page 10125. And the denominator is computed under the assumption that the sample design is simple random sampling, with no stratification and no clustering.

For Taylor series or bootstrap variance estimation, PROC SURVEYREG computes the overall sampling fraction f_{SRS} in the simple random sampling variance by using the value of the **RATE=** or **TOTAL=** option.

If you do not specify either of these options, PROC SURVEYREG assumes that the value of f_{SRS} is negligible and does not use a finite population correction in the analysis, as described in the section “**Specification of Population Totals and Sampling Rates**” on page 10120.

If you specify **RATE=value**, PROC SURVEYREG uses this *value* as the overall sampling fraction f_{SRS} . If you specify **TOTAL=value**, PROC SURVEYREG computes f_{SRS} as the ratio of the number of PSUs in the sample to the specified total.

If you specify stratum sampling rates by using the **RATE=SAS-data-set** option, then PROC SURVEYREG computes stratum totals based on these stratum sampling rates and the number of sample PSUs in each stratum. The procedure sums the stratum totals to form the overall total, and it computes f_{SRS} as the ratio of the number of sample PSUs to the overall total. Alternatively, if you specify stratum totals by using the **TOTAL=SAS-data-set** option, then PROC SURVEYREG sums these totals to compute the overall total. The overall sampling fraction f_{SRS} is then computed as the ratio of the number of sample PSUs to the overall total.

Stratum Collapse

If there is only one sampling unit in a stratum, then PROC SURVEYREG cannot estimate the variance for this stratum for the Taylor series method. To estimate stratum variances, by default the procedure collapses, or combines, those strata that contain only one sampling unit. If you specify the **NOCOLLAPSE** option in the STRATA statement, PROC SURVEYREG does not collapse strata and uses a variance estimate of zero for any stratum that contains only one sampling unit.

Note that stratum collapse only applies to Taylor series variance estimation (the default method, also specified by **VARMETHOD=TAYLOR**). The procedure does not collapse strata for replication methods.

If you do not specify the **NOCOLLAPSE** option for the Taylor series method, PROC SURVEYREG collapses strata according to the following rules. If there are multiple strata that contain only one sampling unit each, then the procedure collapses, or combines, all these strata into a new pooled stratum. If there is only one stratum with a single sampling unit, then PROC SURVEYREG collapses that stratum with the preceding stratum, where strata are ordered by the **STRATA** variable values. If the stratum with one sampling unit is the first stratum, then the procedure combines it with the following stratum.

If you specify stratum sampling rates by using the **RATE=SAS-data-set** option, PROC SURVEYREG computes the sampling rate for the new pooled stratum as the weighted average of the sampling rates for the collapsed strata. See the section “**Computational Details**” on page 10121 for details. If the specified sampling rate equals 0 for any of the collapsed strata, then the pooled stratum is assigned a sampling rate of 0. If you specify stratum totals by using the **TOTAL=SAS-data-set** option, PROC SURVEYREG combines the totals for the collapsed strata to compute the sampling rate for the new pooled stratum.

Sampling Rate of the Pooled Stratum from Collapse

Assuming that PROC SURVEYREG collapses single-unit strata h_1, h_2, \dots, h_c into the pooled stratum, the procedure calculates the sampling rate for the pooled stratum as

$$f_{\text{Pooled Stratum}} = \begin{cases} 0 & \text{if any of } f_{h_l} = 0 \text{ where } l = 1, 2, \dots, c \\ \left(\sum_{l=1}^c n_{h_l} f_{h_l}^{-1} \right)^{-1} \sum_{l=1}^c n_{h_l} & \text{otherwise} \end{cases}$$

Analysis of Variance (ANOVA)

PROC SURVEYREG produces an analysis of variance table for the model specified in the **MODEL** statement. This table is identical to the one produced by the GLM procedure for the model. PROC SURVEYREG computes ANOVA table entries by using the sampling weights, but not the sample design information about stratification and clustering.

The degrees of freedom (*df*) displayed in the ANOVA table are the same as those in the ANOVA table produced by PROC GLM. The Total DF is the total degrees of freedom used to obtain the regression coefficient estimates. The Total DF equals the total number of observations minus 1 if the model includes an intercept. If the model does not include an intercept, the Total DF equals the total number of observations. The Model DF equals the degrees of freedom for the effects in the **MODEL** statement, not including the intercept. The Error DF equals the Total DF minus the Model DF.

Multiple R-Square

PROC SURVEYREG computes a multiple R-square for the weighted regression as

$$R^2 = 1 - \frac{SS_{error}}{SS_{total}}$$

where SS_{error} is the error sum of squares in the ANOVA table

$$SS_{error} = \mathbf{r}'\mathbf{W}\mathbf{r}$$

and SS_{total} is the total sum of squares

$$SS_{total} = \begin{cases} \mathbf{y}'\mathbf{W}\mathbf{y} & \text{if no intercept} \\ \mathbf{y}'\mathbf{W}\mathbf{y} - \left(\sum_{h=1}^H \sum_{i=1}^{n_h} \sum_{j=1}^{m_{hi}} w_{hij} y_{hij} \right)^2 / w... & \text{otherwise} \end{cases}$$

where $w...$ is the sum of the sampling weights over all observations.

Adjusted R-Square

If you specify the `ADJRSQ` option in the `MODEL` statement, PROC SURVEYREG computes an multiple R-square adjusted as the weighted regression as

$$ADJRSQ = \begin{cases} 1 - \frac{n(1 - R^2)}{n - p} & \text{if no intercept} \\ 1 - \frac{(n - 1)(1 - R^2)}{n - p} & \text{otherwise} \end{cases}$$

where R^2 is the multiple R-square.

Root Mean Square Errors

PROC SURVEYREG computes the square root of mean square errors as

$$\sqrt{\text{MSE}} = \sqrt{n SS_{error} / (n - p) w...}$$

where $w...$ is the sum of the sampling weights over all observations.

Variance Estimation

PROC SURVEYREG uses the Taylor series method or replication (resampling) methods to estimate sampling errors of estimators based on complex sample designs (Fuller 2009; Woodruff 1971; Fuller 1975; Fuller et al. 1989; Särndal, Swensson, and Wretman 1992; Wolter 2007; Rust 1985; Dippo, Fay, and Morganstein 1984; Rao and Shao 1999; Rao, Wu, and Yue 1992; Rao and Shao 1996). You can use the `VARMETHOD=` option to specify a variance estimation method to use. By default, the Taylor series method is used. However, replication methods have recently gained popularity for estimating variances in complex survey data analysis. One reason for this popularity is the relative simplicity of replication-based estimates, especially for nonlinear estimators; another is that modern computational capacity has made replication methods feasible for practical survey analysis.

Replication methods draw multiple replicates (also called subsamples) from a full sample according to a specific resampling scheme. The most commonly used resampling schemes are the *balanced repeated replication* (BRR) method, the *jackknife* method, and the *bootstrap* method. For each replicate, the original weights are modified for the PSUs in the replicates to create replicate weights. The parameters of interest are estimated by using the replicate weights for each replicate. Then the variances of parameters of interest are estimated by the variability among the estimates derived from these replicates. You can use the `REPWEIGHTS` statement to provide your own replicate weights for variance estimation.

The following sections provide details about how the variance-covariance matrix of the estimated regression coefficients is estimated for each variance estimation method.

Taylor Series (Linearization)

The Taylor series (linearization) method is the most commonly used method to estimate the covariance matrix of the regression coefficients for complex survey data. It is the default variance estimation method used by PROC SURVEYREG.

Use the notation described in the section “[Notation](#)” on page 10121 to denote the residuals from the linear regression as

$$\mathbf{r} = \mathbf{y} - \mathbf{X}\hat{\boldsymbol{\beta}}$$

with r_{hij} as its elements. Let the $p \times p$ matrix \mathbf{G} be defined as

$$\mathbf{G} = \frac{n-1}{n-p} \sum_{h=1}^H \frac{n_h(1-f_h)}{n_h-1} \sum_{i=1}^{n_h} (\mathbf{e}_{hi\cdot} - \bar{\mathbf{e}}_{h\cdot\cdot})' (\mathbf{e}_{hi\cdot} - \bar{\mathbf{e}}_{h\cdot\cdot})$$

where

$$\mathbf{e}_{hij} = w_{hij} r_{hij} \mathbf{x}_{hij}$$

$$\mathbf{e}_{hi\cdot} = \sum_{j=1}^{m_{hi}} \mathbf{e}_{hij}$$

$$\bar{\mathbf{e}}_{h\cdot\cdot} = \frac{1}{n_h} \sum_{i=1}^{n_h} \mathbf{e}_{hi\cdot}$$

The Taylor series estimate of the covariance matrix of $\hat{\beta}$ is

$$\widehat{V}(\hat{\beta}) = (\mathbf{X}'\mathbf{W}\mathbf{X})^{-1}\mathbf{G}(\mathbf{X}'\mathbf{W}\mathbf{X})^{-1}$$

The factor $(n - 1)/(n - p)$ in the computation of the matrix \mathbf{G} reduces the small sample bias associated with using the estimated function to calculate deviations (Hidioglou, Fuller, and Hickman 1980). For simple random sampling, this factor contributes to the degrees of freedom correction applied to the residual mean square for ordinary least squares in which p parameters are estimated. By default, the procedure uses this adjustment in the variance estimation. If you do not want to use this multiplier in variance estimation, you can specify the `VADJUST=NONE` option in the `MODEL` statement to suppress this factor.

Bootstrap Method

The `VARMETHOD=BOOTSTRAP` option in the `PROC SURVEYREG` statement requests the bootstrap method for variance estimation. This method can be used for stratified sample designs and for designs that have no stratification. If your design is stratified, the bootstrap method requires at least two PSUs in each stratum. You can provide your own bootstrap replicate weights for the analysis by using a `REPWEIGHTS` statement, or the procedure can construct bootstrap replicate weights for the analysis.

`PROC SURVEYREG` estimates the parameter of interest (or requested statistics) from each replicate, and then uses the variability among replicate estimates to estimate the overall variance of these statistics.

This bootstrap method for complex survey data is similar to the method of Rao, Wu, and Yue (1992) and is also known as the bootstrap weights method (Mashreghi, Haziza, and Léger 2016). For more information, see Lohr (2010, Section 9.3.3), Wolter (2007, Chapter 5), Beaumont and Patak (2012), Fuller (2009, Section 4.5), and Shao and Tu (1995, Section 6.2.4). McCarthy and Snowden (1985), Rao and Wu (1988), Sitter (1992b), and Sitter (1992a) provide several adjusted bootstrap variance estimators that are consistent for complex survey data. The naive bootstrap variance estimator that is suitable for infinite populations is not consistent for complex survey data.

Replicate Weight Construction

If you do not provide replicate weights by using a `REPWEIGHTS` statement, `PROC SURVEYREG` constructs bootstrap replicate weights for the analysis. The procedure selects replicate bootstrap samples by with-replacement random sampling of PSUs within strata. You can specify the number of bootstrap replicates in the `REPS=method-option`; by default, the number of replicates is 250. (Increasing the number of replicates can improve the estimation precision but also increases the computation time.) You can specify the bootstrap sample sizes m_h in the `MH=method-option`; by default, $m_h = n_h - 1$, where n_h is the number of PSUs in stratum h .

In each replicate sample, the original sampling weights of the selected units are adjusted to reflect the full sample. These adjusted weights are the *bootstrap replicate weights*. In replicate r , the bootstrap replicate weight for observation j in PSU i in stratum h is computed as

$$\tilde{w}_{hij}^{(r)} = \left\{ 1 + \sqrt{\frac{1 - f_h}{m_h(n_h - 1)}} n_h k_{hi}^{(r)} - \sqrt{\frac{m_h(1 - f_h)}{n_h - 1}} \right\} w_{hij}$$

where $k_{hi}^{(r)}$ is the number of times PSU i is selected for replicate r , and f_h is the sampling fraction in stratum h that you can input by using either the `RATE=` or `TOTAL=` option in the `PROC SURVEYREG` statement.

You can use the `OUTWEIGHTS=SAS-data-set` method-option to store the bootstrap replicate weights in a SAS data set. For information about the contents of the `OUTWEIGHTS=` data set, see the section “[Replicate Weights Output Data Set](#)” on page 10136. You can provide these replicate weights to the procedure for subsequent analyses by using a `REPWEIGHTS` statement.

Variance Estimation

Let R be the total number of bootstrap replicate weights. Denote α_r as the replicate coefficient for the r th replicate ($r = 1, 2, \dots, R$).

When the procedure generates the bootstrap replicate weights, $\alpha_r = 1/R$.

If you provide your own bootstrap replicate weights by including a `REPWEIGHTS` statement, you can specify α_r in the `REPCOEFS=` option. By default, $\alpha_r = 1/R$.

Let $\hat{\beta}$ be the estimated regression coefficients from the full sample for β , and let $\hat{\beta}_r$ be the estimated regression coefficient when the r th set of bootstrap replicate weights is used. PROC SURVEYREG estimates the covariance matrix of $\hat{\beta}$ by the following equation

$$\widehat{V}(\hat{\beta}) = \sum_{r=1}^R \alpha_r (\hat{\beta}_r - \hat{\beta}) (\hat{\beta}_r - \hat{\beta})'$$

Here, the degrees of freedom is the number of clusters minus the number of strata. If there are no clusters, then the degrees of freedom equals the number of observations minus the number of strata. If the design is not stratified, then the degrees of freedom equals the number of PSUs minus one.

If you provide your own replicate weights without specifying the `DF=` option, the degrees of freedom is set to be the number of replicates R .

If you specify the `CENTER=REPLICATES` *method-option*, then PROC SURVEYREG computes the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \sum_{r=1}^R \alpha_r (\hat{\beta}_r - \bar{\beta}) (\hat{\beta}_r - \bar{\beta})'$$

where $\bar{\beta}$ is the average of the replicate estimates and is calculated as follows:

$$\bar{\beta} = \frac{1}{R} \sum_{r=1}^R \hat{\beta}_r$$

If a parameter cannot be computed from one or more replicates, then the procedure computes the variance estimate by using those replicates from which the parameter can be estimated, and the number of those replicates, R' , replaces the original number of replicates, R , in the variance estimation.

If you do not provide your own value for the degrees of freedom and if R' is less than the number of PSUs minus the number of strata, then the degrees of freedom is set to R' .

Balanced Repeated Replication (BRR) Method

The balanced repeated replication (BRR) method requires that the full sample be drawn by using a stratified sample design with two primary sampling units (PSUs) per stratum. Let H be the total number of strata. The total number of replicates R is the smallest multiple of 4 that is greater than H . However, if you prefer a larger number of replicates, you can specify the `REPS=number` option. If a $number \times number$ Hadamard matrix cannot be constructed, the number of replicates is increased until a Hadamard matrix becomes available.

Each replicate is obtained by deleting one PSU per stratum according to the corresponding Hadamard matrix and adjusting the original weights for the remaining PSUs. The new weights are called replicate weights.

Replicates are constructed by using the first H columns of the $R \times R$ Hadamard matrix. The r th ($r = 1, 2, \dots, R$) replicate is drawn from the full sample according to the r th row of the Hadamard matrix as follows:

- If the (r, h) element of the Hadamard matrix is 1, then the first PSU of stratum h is included in the r th replicate and the second PSU of stratum h is excluded.
- If the (r, h) element of the Hadamard matrix is -1 , then the second PSU of stratum h is included in the r th replicate and the first PSU of stratum h is excluded.

Note that the “first” and “second” PSUs are determined by data order in the input data set. Thus, if you reorder the data set and perform the same analysis by using BRR method, you might get slightly different results, because the contents in each replicate sample might change.

The replicate weights of the remaining PSUs in each half-sample are then doubled to their original weights. For more information about the BRR method, see Wolter (2007) and Lohr (2010).

By default, an appropriate Hadamard matrix is generated automatically to create the replicates. You can request that the Hadamard matrix be displayed by specifying the `VARMETHOD=BRR(PRINTH)` *method-option*. If you provide a Hadamard matrix by specifying the `VARMETHOD=BRR(HADAMARD=)` *method-option*, then the replicates are generated according to the provided Hadamard matrix.

You can use the `VARMETHOD=BRR(OUTWEIGHTS=)` *method-option* to save the replicate weights into a SAS data set.

Let $\hat{\beta}$ be the estimated regression coefficients from the full sample for β , and let $\hat{\beta}_r$ be the estimated regression coefficient from the r th replicate by using replicate weights. PROC SURVEYREG estimates the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \frac{1}{R} \sum_{r=1}^R (\hat{\beta}_r - \hat{\beta}) (\hat{\beta}_r - \hat{\beta})'$$

with H degrees of freedom, where H is the number of strata. If you provide your own replicate weights without specifying the `DF=` option, the degrees of freedom is set to be the number of replicates R .

If you specify the `CENTER=REPLICATES` *method-option*, then PROC SURVEYREG computes the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \frac{1}{R} \sum_{r=1}^R (\hat{\beta}_r - \bar{\beta}) (\hat{\beta}_r - \bar{\beta})'$$

where $\bar{\beta}$ is the average of the replicate estimates and is calculated as follows:

$$\bar{\beta} = \frac{1}{R} \sum_{r=1}^R \hat{\beta}_r$$

If a parameter cannot be computed from one or more replicates, then the procedure computes the variance estimate by using those replicates from which the parameter can be estimated, and the number of those replicates, R' , replaces the original number of replicates, R , in the variance estimation.

If you do not provide your own value for the degrees of freedom, then the degrees of freedom equals the minimum between R' and the number of strata, H .

Fay's BRR Method

Fay's method is a modification of the BRR method, and it requires a stratified sample design with two primary sampling units (PSUs) per stratum. The total number of replicates R is the smallest multiple of 4 that is greater than the total number of strata H . However, if you prefer a larger number of replicates, you can specify the `REPS=method-option`.

For each replicate, Fay's method uses a Fay coefficient $0 \leq \epsilon < 1$ to impose a perturbation of the original weights in the full sample that is gentler than using only half-samples, as in the traditional BRR method. The Fay coefficient $0 \leq \epsilon < 1$ can be set by specifying the `FAY = \epsilon method-option`. By default, $\epsilon = 0.5$ if the `FAY method-option` is specified without providing a value for ϵ (Judkins 1990; Rao and Shao 1999). When $\epsilon = 0$, Fay's method becomes the traditional BRR method. For more information, see Dippo, Fay, and Morganstein (1984); Fay (1984, 1989); Judkins (1990).

Let H be the number of strata. Replicates are constructed by using the first H columns of the $R \times R$ Hadamard matrix, where R is the number of replicates, $R > H$. The r th ($r = 1, 2, \dots, R$) replicate is created from the full sample according to the r th row of the Hadamard matrix as follows:

- If the (r, h) element of the Hadamard matrix is 1, then the full sample weight of the first PSU in stratum h is multiplied by ϵ and the full sample weight of the second PSU is multiplied by $2 - \epsilon$ to obtain the r th replicate weights.
- If the (r, h) element of the Hadamard matrix is -1 , then the full sample weight of the first PSU in stratum h is multiplied by $2 - \epsilon$ and the full sample weight of the second PSU is multiplied by ϵ to obtain the r th replicate weights.

You can use the `VARMETHOD=BRR(OUTWEIGHTS=) method-option` to save the replicate weights into a SAS data set.

By default, an appropriate Hadamard matrix is generated automatically to create the replicates. You can request that the Hadamard matrix be displayed by specifying the `VARMETHOD=BRR(PRINTH) method-option`. If you provide a Hadamard matrix by specifying the `VARMETHOD=BRR(HADAMARD=) method-option`, then the replicates are generated according to the provided Hadamard matrix.

Let $\hat{\beta}$ be the estimated regression coefficients from the full sample for β . Let $\hat{\beta}_r$ be the estimated regression coefficient obtained from the r th replicate by using replicate weights. PROC SURVEYREG estimates the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \frac{1}{R(1-\epsilon)^2} \sum_{r=1}^R (\hat{\beta}_r - \hat{\beta}) (\hat{\beta}_r - \hat{\beta})'$$

with H degrees of freedom, where H is the number of strata. If you provide your own replicate weights without specifying the `DF=` option, the degrees of freedom is set to be the number of replicates R .

If you specify the `CENTER=REPLICATES` *method-option*, then PROC SURVEYREG computes the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \frac{1}{R(1-\epsilon)^2} \sum_{r=1}^R (\hat{\beta}_r - \bar{\beta})(\hat{\beta}_r - \bar{\beta})'$$

where $\bar{\beta}$ is the average of the replicate estimates and is calculated as follows:

$$\bar{\beta} = \frac{1}{R} \sum_{r=1}^R \hat{\beta}_r$$

If a parameter cannot be computed from one or more replicates, then the procedure computes the variance estimate by using those replicates from which the parameter can be estimated, and the number of those replicates, R' , replaces the original number of replicates, R , in the variance estimation.

If you do not provide your own value for the degrees of freedom, then the degrees of freedom equals the minimum between R' and the number of strata, H .

Jackknife Method

The jackknife method of variance estimation deletes one PSU at a time from the full sample to create replicates. The total number of replicates R is the same as the total number of PSUs. In each replicate, the sample weights of the remaining PSUs are modified by the jackknife coefficient α_r . The modified weights are called replicate weights.

The jackknife coefficient and replicate weights are described as follows.

Without Stratification If there is no stratification in the sample design (no `STRATA` statement), the jackknife coefficients α_r are the same for all replicates:

$$\alpha_r = \frac{R-1}{R} \quad \text{where } r = 1, 2, \dots, R$$

Denote the original weight in the full sample for the j th member of the i th PSU as w_{ij} . If the i th PSU is included in the r th replicate ($r = 1, 2, \dots, R$), then the corresponding replicate weight for the j th member of the i th PSU is defined as

$$w_{ij}^{(r)} = w_{ij} / \alpha_r$$

With Stratification If the sample design involves stratification, each stratum must have at least two PSUs to use the jackknife method.

Let stratum \tilde{h}_r be the stratum from which a PSU is deleted for the r th replicate. Stratum \tilde{h}_r is called the *donor stratum*. Let $n_{\tilde{h}_r}$ be the total number of PSUs in the donor stratum \tilde{h}_r . The jackknife coefficients are defined as

$$\alpha_r = \frac{n_{\tilde{h}_r} - 1}{n_{\tilde{h}_r}} \quad \text{where } r = 1, 2, \dots, R$$

Denote the original weight in the full sample for the j th member of the i th PSU as w_{ij} . If the i th PSU is included in the r th replicate ($r = 1, 2, \dots, R$), then the corresponding replicate weight for the j th member of the i th PSU is defined as

$$w_{ij}^{(r)} = \begin{cases} w_{ij} & \text{if } i\text{th PSU is not in the donor stratum } \tilde{h}_r \\ w_{ij}/\alpha_r & \text{if } i\text{th PSU is in the donor stratum } \tilde{h}_r \end{cases}$$

You can use the `VARMETHOD=JACKKNIFE(OUTJKCOEFS=)` *method-option* to save the jackknife coefficients into a SAS data set and use the `VARMETHOD=JACKKNIFE(OUTWEIGHTS=)` *method-option* to save the replicate weights into a SAS data set.

If you provide your own replicate weights in a `REPWEIGHTS` statement, then you can also provide corresponding jackknife coefficients in the `JKCOEFS=` or `REPCOEFS=` option. If you provide replicate weights but do not provide jackknife coefficients, PROC SURVEYREG uses $\alpha_r = (R-1)/R$ as the jackknife coefficient for all replicates by default.

Let $\hat{\beta}$ be the estimated regression coefficients from the full sample for β . Let $\hat{\beta}_r$ be the estimated regression coefficient obtained from the r th replicate by using replicate weights. PROC SURVEYREG estimates the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \sum_{r=1}^R \alpha_r (\hat{\beta}_r - \hat{\beta}) (\hat{\beta}_r - \hat{\beta})'$$

with $R-H$ degrees of freedom, where R is the number of replicates and H is the number of strata, or $R-1$ when there is no stratification. If you provide your own replicate weights without specifying the `DF=` option, the degrees of freedom is set to be the number of replicates R .

If you specify the `CENTER=REPLICATES` *method-option*, then PROC SURVEYREG computes the covariance matrix of $\hat{\beta}$ by

$$\widehat{V}(\hat{\beta}) = \sum_{r=1}^R \alpha_r (\hat{\beta}_r - \bar{\beta}) (\hat{\beta}_r - \bar{\beta})'$$

where $\bar{\beta}$ is the average of the replicate estimates and is calculated as follows:

$$\bar{\beta} = \frac{1}{R} \sum_{r=1}^R \hat{\beta}_r$$

If a parameter cannot be computed from one or more replicates, then the procedure computes the variance estimate by using those replicates from which the parameter can be estimated, and the number of those replicates, R' , replaces the original number of replicates, R , in the variance estimation.

If you do not provide your own value for the degrees of freedom, then the degrees of freedom equals $R' - H$.

Hadamard Matrix

A Hadamard matrix \mathbf{H} is a square matrix whose elements are either 1 or -1 such that

$$\mathbf{H}\mathbf{H}' = k\mathbf{I}$$

where k is the dimension of \mathbf{H} and \mathbf{I} is the identity matrix of order k . The order k is necessarily 1, 2, or a positive integer that is a multiple of 4.

For example, the following matrix is a Hadamard matrix of dimension $k = 8$:

1	1	1	1	1	1	1	1
1	-1	1	-1	1	-1	1	-1
1	1	-1	-1	1	1	-1	-1
1	-1	-1	1	1	-1	-1	1
1	1	1	1	-1	-1	-1	-1
1	-1	1	-1	-1	1	-1	1
1	1	-1	-1	-1	-1	1	1
1	-1	-1	1	-1	1	1	-1

Degrees of Freedom

PROC SURVEYREG produces tests for the significance of model effects, regression parameters, estimable functions specified in the **ESTIMATE** statement, and contrasts specified in the **CONTRAST** statement. It computes all these tests taking into account the sample design. The degrees of freedom for these tests differ from the degrees of freedom for the ANOVA table, which does not consider the sample design.

Denominator Degrees of Freedom

The denominator *df* refers to the denominator degrees of freedom for F tests and to the degrees of freedom for t tests in the analysis.

For the **Taylor series** method, the denominator *df* equals the number of clusters minus the actual number of strata. If there are no clusters, the denominator *df* equals the number of observations minus the actual number of strata. The *actual number of strata* equals the following:

- one, if there is no **STRATA** statement
- the number of strata in the sample, if there is a **STRATA** statement but the procedure does not collapse any strata
- the number of strata in the sample after collapsing, if there is a **STRATA** statement and the procedure collapses strata that have only one sampling unit

For replication variance estimation methods that include a **REPWEIGHTS** statement, the denominator *df* equals the number of **REPWEIGHTS** variables, unless you specify an alternative in the **DF= option** in the **REPWEIGHTS** statement.

When the **BRR** method (including **Fay's method**) is specified but no **REPWEIGHTS** statement is included, the denominator *df* equals the number of strata.

When the **jackknife** method or **bootstrap** method is specified but no **REPWEIGHTS** statement is included, the denominator *df* is the same as the Taylor series method described earlier.

Alternatively, you can specify your own denominator *df* by using the **DF= option** in the **MODEL** statement.

Numerator Degrees of Freedom

The numerator *df* refers to the numerator degrees of freedom for the Wald *F* statistic associated with an effect or with a contrast. The procedure computes the Wald *F* statistic for an effect as a Type III test; that is, the test has the following properties:

- The hypothesis for an effect does not involve parameters of other effects except for containing effects (which it must involve to be estimable).
- The hypotheses to be tested are invariant to the ordering of effects in the model.

See the section “[Testing Effects](#)” on page 10133 for more information. The numerator *df* for the Wald *F* statistic for a contrast is the rank of the **L** matrix that defines the contrast.

Testing

Testing Effects

For each effect in the model, PROC SURVEYREG computes an **L** matrix such that every element of **Lβ** is estimable; the **L** matrix has the maximum possible rank that is associated with the effect. To test the effect, the procedure uses the Wald *F* statistic for the hypothesis $H_0: \mathbf{L}\boldsymbol{\beta} = 0$. The Wald *F* statistic equals

$$F_{\text{Wald}} = \frac{(\mathbf{L}\hat{\boldsymbol{\beta}})'(\mathbf{L}'\hat{\mathbf{V}}\mathbf{L})^{-1}(\mathbf{L}\hat{\boldsymbol{\beta}})}{\text{rank}(\mathbf{L}'\hat{\mathbf{V}}\mathbf{L})}$$

with numerator degrees of freedom equal to $\text{rank}(\mathbf{L}'\hat{\mathbf{V}}\mathbf{L})$.

In the [Taylor series](#) method, the denominator degrees of freedom is equal to the number of clusters minus the number of strata (unless you specify the denominator degrees of freedom with the **DF=** option in the MODEL statement). For details about denominator degrees of freedom in replication methods, see the section “[Denominator Degrees of Freedom](#)” on page 10132. It is possible that the **L** matrix cannot be constructed for an effect, in which case that effect is not testable. For more information about how the matrix **L** is constructed, see the discussion in Chapter 15, “[The Four Types of Estimable Functions](#).”

You can use the **TEST** statement to perform *F* tests that test Type I, Type II, or Type III hypotheses. For details about the syntax of the **TEST** statement, see the section “[TEST Statement](#)” on page 521 in Chapter 19, “[Shared Concepts and Topics](#).”

Contrasts

You can use the **CONTRAST** statement to perform custom hypothesis tests. If the hypothesis is testable in the univariate case, the Wald *F* statistic for $H_0: \mathbf{L}\boldsymbol{\beta} = 0$ is computed as

$$F_{\text{Wald}} = \frac{(\mathbf{L}_{\text{Full}}\hat{\boldsymbol{\beta}})'(\mathbf{L}'_{\text{Full}}\hat{\mathbf{V}}\mathbf{L}_{\text{Full}})^{-1}(\mathbf{L}_{\text{Full}}\hat{\boldsymbol{\beta}})}{\text{rank}(\mathbf{L})}$$

where **L** is the contrast vector or matrix you specify, **β** is the vector of regression parameters, $\hat{\boldsymbol{\beta}} = (\mathbf{X}'\mathbf{W}\mathbf{X})^{-1}\mathbf{X}'\mathbf{W}\mathbf{Y}$, $\hat{\mathbf{V}}$ is the estimated covariance matrix of $\hat{\boldsymbol{\beta}}$, $\text{rank}(\mathbf{L})$ is the rank of **L**, and **L_{Full}** is a matrix such that

- \mathbf{L}_{Full} has the same number of columns as \mathbf{L}
- \mathbf{L}_{Full} has full row rank
- the rank of \mathbf{L}_{Full} equals the rank of the \mathbf{L} matrix
- all rows of \mathbf{L}_{Full} are estimable functions
- the Wald F statistic computed using the \mathbf{L}_{Full} matrix is equivalent to the Wald F statistic computed by using the \mathbf{L} matrix with any row deleted that is a linear combination of previous rows

If \mathbf{L} is a full-rank matrix and all rows of \mathbf{L} are estimable functions, then \mathbf{L}_{Full} is the same as \mathbf{L} . It is possible that \mathbf{L}_{Full} matrix cannot be constructed for contrasts in a CONTRAST statement, in which case the contrasts are not testable.

Domain Analysis

A **DOMAIN** statement requests that the procedure perform regression analysis for each domain.

For a domain D , let I_D be the corresponding indicator variable:

$$I_D(h, i, j) = \begin{cases} 1 & \text{if observation } (h, i, j) \text{ belongs to domain } D \\ 0 & \text{otherwise} \end{cases}$$

Let

$$v_{hij} = w_{hij} I_D(h, i, j) = \begin{cases} w_{hij} & \text{if observation } (h, i, j) \text{ belongs to domain } D \\ 0 & \text{otherwise} \end{cases}$$

The regression in domain D uses v as the weight variable.

Computational Resources

Due to the complex nature of survey data analysis, the SURVEYREG procedure requires more memory than an analysis of the same regression model by the GLM procedure. For details about the amount of memory related to the modeling, see the section “[Computational Resources](#)” on page 4137 in Chapter 52, “[The GLM Procedure](#).”

The memory needed by the SURVEYREG procedure to handle the survey design is described as follows.

Let

- H be the total number of strata
- n_c be the total number of clusters in your sample across all H strata, if you specify a **CLUSTER** statement
- p be the total number of parameters in the model

The memory needed (in bytes) is

$$48H + 8pH + 4p(p + 1)H$$

For a cluster sample, the additional memory needed (in bytes) is

$$48H + 8pH + 4p(p + 1)H + 4p(p + 1)n_c + 16n_c$$

The SURVEYREG procedure also uses other small amounts of additional memory. However, when you have a large number of clusters or strata, or a large number of parameters in your model, the memory described previously dominates the total memory required by the procedure.

Output Data Sets

You can use the Output Delivery System (ODS) to create a SAS data set from any piece of PROC SURVEYREG output. See the section “[ODS Table Names](#)” on page 10141 for more information. For a more detailed description of using ODS, see Chapter 22, “[Using the Output Delivery System](#).”

PROC SURVEYREG also provides an **OUTPUT** statement to create a data set that contains estimated linear predictors and their standard error estimates, the residuals from the linear regression, and the confidence limits for the predictors.

If you use replication variance estimation, PROC SURVEYREG provides an output data set that stores the replicate weights and an output data set that stores the jackknife coefficients for jackknife variance estimation.

OUT= Data Set Created by the OUTPUT Statement

The **OUTPUT** statement produces an output data set that contains the following:

- all original data from the SAS data set input to PROC SURVEYREG
- the new variables corresponding to the diagnostic measures specified with statistics *keywords* in the **OUTPUT** statement (PREDICTED=, RESIDUAL=, and so on)

When any independent variable in the analysis (including all classification variables) is missing for an observation, then all new variables that correspond to diagnostic measures are missing for the observation in the output data set.

When a dependent variable in the analysis is missing for an observation, then the residual variable that corresponds to R is also missing in the output data set. However, the variables corresponding to LCLM, P, STDP, and UCLM are not missing.

Replicate Weights Output Data Set

If you specify the `OUTWEIGHTS=` *method-option* for `VARMETHOD=BRR`, `VARMETHOD=JACKKNIFE`, or `VARMETHOD=BOOTSTRAP`, PROC SURVEYREG stores the replicate weights in an output data set. The `OUTWEIGHTS=` output data set contains all observations from the `DATA=` input data set that are valid (used in the analysis). (A valid observation is an observation that has a positive value of the `WEIGHT` variable. Valid observations must also have nonmissing values of the `STRATA` and `CLUSTER` variables, unless you specify the `MISSING` option.)

The `OUTWEIGHTS=` data set contains all variables in the `DATA=` input data set and the replicate weight variables, `RepWt_1`, `RepWt_2`, . . . , `RepWt_n`, where n is the total number of replicates in the analysis. Each replicate weight variable contains the replicate weights for the corresponding replicate. Replicate weights equal 0 for observations that are not included in the replicate.

After the procedure creates replicate weights for a particular input data set and survey design, you can use the `OUTWEIGHTS=` *method-option* to store these replicate weights and then use them again in subsequent analyses, either in PROC SURVEYREG or in other survey procedures. You can use the `REPWEIGHTS` statement to provide replicate weights for the procedure.

Jackknife Coefficients Output Data Set

If you specify the `OUTJKCOEFS=` *method-option* for `VARMETHOD=JACKKNIFE`, PROC SURVEYREG stores the **jackknife coefficients** in an output data set. The `OUTJKCOEFS=` output data set contains one observation for each replicate. The `OUTJKCOEFS=` data set contains the following variables:

- `Replicate`, which is the replicate number for the jackknife coefficient
- `JKCoefficient`, which is the jackknife coefficient
- `DonorStratum`, which is the stratum of the PSU that was deleted to construct the replicate, if you specify a `STRATA` statement

After the procedure creates jackknife coefficients for a particular input data set and survey design, you can use the `OUTJKCOEFS=` *method-option* to store these coefficients and then use them again in subsequent analyses, either in PROC SURVEYREG or in the other survey procedures. You can use the `JKCOEFS=` option in the `REPWEIGHTS` statement to provide jackknife coefficients for the procedure.

Displayed Output

The SURVEYREG procedure produces output that is described in the following sections.

Output that is generated by the `EFFECT`, `ESTIMATE`, `LSMEANS`, `LSMESTIMATE`, and `SLICE` statements is not listed below. For information about the output that is generated by these statements, see the corresponding sections of Chapter 19, “Shared Concepts and Topics.”

Data Summary

By default, PROC SURVEYREG displays the following information in the “Data Summary” table:

- Number of Observations, which is the total number of observations used in the analysis, excluding observations with missing values
- Sum of Weights, if you specify a WEIGHT statement
- Mean of the dependent variable in the MODEL statement, or Weighted Mean if you specify a WEIGHT statement
- Sum of the dependent variable in the MODEL statement, or Weighted Sum if you specify a WEIGHT statement

Design Summary

When you specify a CLUSTER statement or a STRATA statement, the procedure displays a “Design Summary” table, which provides the following sample design information:

- Number of Strata, if you specify a STRATA statement
- Number of Strata Collapsed, if the procedure collapses strata
- Number of Clusters, if you specify a CLUSTER statement
- Overall Sampling Rate used to calculate the design effect, if you specify the DEFF option in the MODEL statement

Domain Summary

By default, PROC SURVEYREG displays the following information in the “Domain Summary” table:

- Number of Observations, which is the total number of observations used in the analysis
- total number of observations in the current domain
- total number of observations not in the current domain
- Sum of Weights for the observations in the current domain, if you specify a WEIGHT statement

Fit Statistics

By default, PROC SURVEYREG displays the following regression statistics in the “Fit Statistics” table:

- R-square for the regression
- Root MSE, which is the square root of the mean square error
- Denominator DF, which is the denominator degrees of freedom for the F tests and also the degrees of freedom for the t tests produced by the procedure

Variance Estimation

If the variance method is not Taylor series (see the section “Variance Estimation” on page 10125) or if the **NOMCAR** option is used, by default, PROC SURVEYREG displays the following variance estimation information in the “Variance Estimation” table:

- Method, which is the variance estimation method
- Number of Replicates
- Initial seed for the random number that the bootstrap method uses
- Hadamard Data Set name, if you specify the **VARMETHOD=BRR(HADAMARD=)** *method-option*
- Fay Coefficient, if you specify the **VARMETHOD=BRR(FAY)** *method-option*
- Replicate Weights input data set name, if you provide replicate weights with a **REPWEIGHTS** statement
- Missing Levels, which indicates whether missing levels of categorical variables are included by the **MISSING** option
- Missing Values, which indicates whether observations with missing values are included in the analysis by the **NOMCAR** option

Stratum Information

When you specify the **LIST** option in the **STRATA** statement, PROC SURVEYREG displays a “Stratum Information” table, which provides the following information for each stratum:

- Stratum Index, which is a sequential stratum identification number
- **STRATA** variable(s), which lists the levels of **STRATA** variables for the stratum
- Population Total, if you specify the **TOTAL=** option
- Sampling Rate, if you specify the **TOTAL=** option or the **RATE=** option. If you specify the **TOTAL=** option, the sampling rate is based on the number of nonmissing observations in the stratum.
- N Obs, which is the number of observations
- number of Clusters, if you specify a **CLUSTER** statement
- Collapsed, which has the value ‘Yes’ if the stratum is collapsed with another stratum before analysis

If PROC SURVEYREG collapses strata, the “Stratum Information” table also displays stratum information for the new, collapsed stratum. The new stratum has a Stratum Index of 0 and is labeled ‘Pooled.’

Class Level Information

If you use a CLASS statement to name classification variables, PROC SURVEYREG displays a “Class Level Information” table. This table contains the following information for each classification variable:

- CLASS Variable, which lists each CLASS variable name
- Levels, which is the number of values or levels of the classification variable
- Values, which lists the values of the classification variable. The values are separated by a white space character; therefore, to avoid confusion, you should not include a white space character within a classification variable value.

X'X Matrix

If you specify the XPX option in the MODEL statement, PROC SURVEYREG displays the $X'X$ matrix. When there is a WEIGHT variable, the procedure displays the $X'WX$ matrix. This option also displays the crossproducts vector $X'y$ or $X'Wy$, where y is the response vector (dependent variable).

Inverse Matrix of X'X

If you specify the INVERSE option in the MODEL statement, PROC SURVEYREG displays the inverse or the generalized inverse of the $X'X$ matrix. When there is a WEIGHT variable, the procedure displays the inverse or the generalized inverse of the $X'WX$ matrix.

ANOVA for Dependent Variable

If you specify the ANOVA option in the model statement, PROC SURVEYREG displays an analysis of variance table for the dependent variable. This table is identical to the ANOVA table displayed by the GLM procedure.

Tests of Model Effects

By default, PROC SURVEYREG displays a “Tests of Model Effects” table, which provides Wald’s F test for each effect in the model. The table contains the following information for each effect:

- Effect, which is the effect name
- Num DF, which is the numerator degrees of freedom for Wald’s F test
- F Value, which is Wald’s F statistic
- Pr > F, which is the significance probability corresponding to the F Value

A footnote displays the denominator degrees of freedom, which is the same for all effects.

Estimated Regression Coefficients

PROC SURVEYREG displays the “Estimated Regression Coefficients” table by default when there is no CLASS statement. Also, the procedure displays this table when you specify a CLASS statement and also specify the SOLUTION option in the MODEL statement. This table contains the following information for each regression parameter:

- Parameter, which identifies the effect or regressor variable
- Estimate, which is the estimate of the regression coefficient
- Standardized Estimate, which is the standardized regression coefficient
- Standard Error, which is the standard error of the estimate
- t Value, which is the t statistic for testing $H_0: \text{Parameter} = 0$
- $\text{Pr} > |t|$, which is the two-sided significance probability corresponding to the t Value

Covariance of Estimated Regression Coefficients

When you specify the COVB option in the MODEL statement, PROC SURVEYREG displays the “Covariance of Estimated Regression Coefficients” matrix.

Coefficients of Contrast

When you specify the E option in a CONTRAST statement, PROC SURVEYREG displays a “Coefficients of Contrast” table for the contrast. You can use this table to check the coefficients you specified in the CONTRAST statement. Also, this table gives a note for a nonestimable contrast.

Analysis of Contrasts

If you specify a CONTRAST statement, PROC SURVEYREG produces an “Analysis of Contrasts” table, which displays Wald’s F test for the contrast. If you use more than one CONTRAST statement, the procedure displays all results in the same table. The “Analysis of Contrasts” table contains the following information for each contrast:

- Contrast, which is the label of the contrast
- Num DF, which is the numerator degrees of freedom for Wald’s F test
- F Value, which is Wald’s F statistic for testing $H_0: \text{Contrast} = 0$
- $\text{Pr} > F$, which is the significance probability corresponding to the F Value

Hadamard Matrix

If you specify the `VARMETHOD=BRR(PRINTH)` *method-option* in the PROC SURVEYREG statement, the procedure displays the Hadamard matrix.

When you provide a Hadamard matrix with the `VARMETHOD=BRR(HADAMARD=)` *method-option* but the procedure does not use the entire matrix, the procedure displays only the rows and columns that are actually used to construct replicates.

ODS Table Names

PROC SURVEYREG assigns a name to each table it creates; these names are listed in Table 122.9. You can use these names to refer to tables when you use the Output Delivery System (ODS) to select tables and create output data sets. For more information about ODS, see Chapter 22, “Using the Output Delivery System.”

To improve the consistency among procedures, tables that are generated by the ESTIMATE statements are changed slightly in appearance and formatting compared to releases prior to SAS/STAT 9.22. However, the statistics in the “Estimates” table remain unchanged. The Coef table replaces the previous EstimateCoef table that displays the L matrix coefficients of an estimable function of the parameters.

The EFFECT, ESTIMATE, LSMEANS, LSMESTIMATE, and SLICE statements also create tables, which are not listed in Table 122.9. For information about these tables, see the corresponding sections of Chapter 19, “Shared Concepts and Topics.”

Table 122.9 ODS Tables Produced by PROC SURVEYREG

ODS Table Name	Description	Statement	Option
ANOVA	ANOVA for dependent variable	MODEL	ANOVA
ClassVarInfo	Class level information	CLASS	Default
ContrastCoef	Coefficients of contrast	CONTRAST	E
Contrasts	Analysis of contrasts	CONTRAST	Default
CovB	Covariance of estimated regression coefficients	MODEL	COVB
DataSummary	Data summary	PROC	Default
DesignSummary	Design summary	STRATA CLUSTER	Default
DomainSummary	Domain summary	DOMAIN	Default
Effects	Tests of model effects	MODEL	Default
FitStatistics	Fit statistics	MODEL	Default
HadamardMatrix	Hadamard matrix	PROC	PRINTH
InvXPX	Inverse matrix of $X'X$	MODEL	I
ParameterEstimates	Estimated regression coefficients	MODEL	SOLUTION
StrataInfo	Stratum information	STRATA	LIST
VarianceEstimation	Variance estimation	PROC	Default
XPX	$X'X$ matrix	MODEL	XPX

By referring to the names of such tables, you can use the ODS OUTPUT statement to place one or more of these tables in output data sets.

For example, the following statements create an output data set MyStrata, which contains the StrataInfo table, an output data set MyParmEst, which contains the ParameterEstimates table, and an output data set Cov, which contains the CovB table for the ice cream study discussed in the section “Stratified Sampling” on page 10085:

```

title1 'Ice Cream Spending Analysis';
title2 'Stratified Sample Design';
proc surveyreg data=IceCream total=StudentTotals;
  strata Grade /list;
  class Kids;
  model Spending = Income Kids / solution covb;
  weight Weight;
  ods output StrataInfo = MyStrata
             ParameterEstimates = MyParmEst
             CovB = Cov;
run;

```

Note that the option CovB is specified in the MODEL statement in order to produce the covariance matrix table.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 23, “Statistical Graphics Using ODS.”

Before you create graphs, ODS Graphics must be enabled (for example, by specifying the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” on page 651 in Chapter 23, “Statistical Graphics Using ODS.”

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” on page 650 in Chapter 23, “Statistical Graphics Using ODS.”

When ODS Graphics is enabled, the ESTIMATE, LSMEANS, LSMESTIMATE, and SLICE statements can produce plots that are associated with their analyses. For information about these plots, see the corresponding sections of Chapter 19, “Shared Concepts and Topics.”

When ODS Graphics is enabled and when the regression model depends on at most one continuous variable as a regressor, excluding the intercept, the PLOTS= option in the PROC SURVEYREG statement controls fit plots for the regression.

PROC SURVEYREG provides a bubble plot or a heat map for model fitting. You can request a specific type of presentation of the weights by specifying the PLOTS(WEIGHT=) global plot option to request either a bubble plot or a heat map plot of the data that overlays the regression line and confidence limits band of the prediction in a fit plot. If you do not specify this option, the default plot depends on the number of observations in your data. That is, for a data set that contains 100 observations or less, the default is a bubble plot, in which the bubble area is proportional to the sampling weight of an observation. For a data set that contains more than 100 observations, the default is a heat map, in which the color of heat represents the sum of weights at the corresponding location.

PROC SURVEYREG assigns a name to each graph that it creates using ODS Graphics. You can use the name to refer to the graph. Table 122.10 lists the name of the graph that PROC SURVEYREG generates, together with its description and the PLOTS= option *plot-request* that produces it.

Table 122.10 ODS Graphs Produced by PROC SURVEYREG

ODS Graph Name	Description	PLOTS= Option
FitPlot	Regression line and confidence limits band of the prediction overlaid on a bubble plot or a heat map of the data	FIT

Examples: SURVEYREG Procedure

Example 122.1: Simple Random Sampling

This example investigates the relationship between the labor force participation rate (LFPR) of women in 1968 and 1972 in large cities in the United States. A simple random sample of 19 cities is drawn from a total of 200 cities. For each selected city, the LFPRs are recorded and saved in a SAS data set Labor. In the following DATA step, LFPR in 1972 is contained in the variable LFPR1972, and the LFPR in 1968 is identified by the variable LFPR1968:

```
data Labor;
  input City $ 1-16 LFPR1972 LFPR1968;
  datalines;
New York      .45      .42
Los Angeles   .50      .50
Chicago       .52      .52
Philadelphia   .45      .45
Detroit       .46      .43
San Francisco .55      .55
Boston        .60      .45
Pittsburgh    .49      .34
St. Louis     .35      .45
Connecticut   .55      .54
Washington D.C. .52      .42
Cincinnati    .53      .51
Baltimore     .57      .49
Newark        .53      .54
Minn/St. Paul .59      .50
Buffalo       .64      .58
Houston       .50      .49
Patterson     .57      .56
Dallas        .64      .63
;
```

Assume that the LFPRs in 1968 and 1972 have a linear relationship, as shown in the following model:

$$\text{LFPR1972} = \beta_0 + \beta_1 * \text{LFPR1968} + \text{error}$$

You can use PROC SURVEYREG to obtain the estimated regression coefficients and estimated standard errors of the regression coefficients. The following statements perform the regression analysis:

```
ods graphics on;
title 'Study of Labor Force Participation Rates of Women';
proc surveyreg data=Labor total=200;
  model LFPR1972 = LFPR1968;
run;
```

Here, the TOTAL=200 option specifies the finite population total from which the simple random sample of 19 cities is drawn. You can specify the same information by using the sampling rate option RATE=0.095 (19/200=.095).

Output 122.1.1 summarizes the data information and the fit information.

Output 122.1.1 Summary of Regression Using Simple Random Sampling

Study of Labor Force Participation Rates of Women

The SURVEYREG Procedure

Regression Analysis for Dependent Variable LFPR1972

Data Summary	
Number of Observations	19
Mean of LFPR1972	0.52684
Sum of LFPR1972	10.01000

Fit Statistics	
R-Square	0.3970
Root MSE	0.05657
Denominator DF	18

Output 122.1.2 presents the significance tests for the model effects and estimated regression coefficients. The F tests and t tests for the effects in the model are also presented in these tables.

Output 122.1.2 Regression Coefficient Estimates

Tests of Model Effects			
Effect	Num DF	F Value	Pr > F
Model	1	13.84	0.0016
Intercept	1	4.63	0.0452
LFPR1968	1	13.84	0.0016

Note: The denominator degrees of freedom for the F tests is 18.

Output 122.1.2 continued


Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	0.20331056	0.09444296	2.15	0.0452
LFPR1968	0.65604048	0.17635810	3.72	0.0016

Note: The degrees of freedom for the t tests is 18.

From the regression performed by PROC SURVEYREG, you obtain a positive estimated slope for the linear relationship between the LFPR in 1968 and the LFPR in 1972. The regression coefficients are all significant at the 5% level. The effects Intercept and LFPR1968 are significant in the model at the 5% level. In this example, the *F* test for the overall model without intercept is the same as the effect LFPR1968.

When ODS graphics is enabled and you have only one regressor in the model, PROC SURVEYREG displays a plot of the model fitting, which is shown in [Output 122.1.3](#).

Output 122.1.3 Regression Fitting

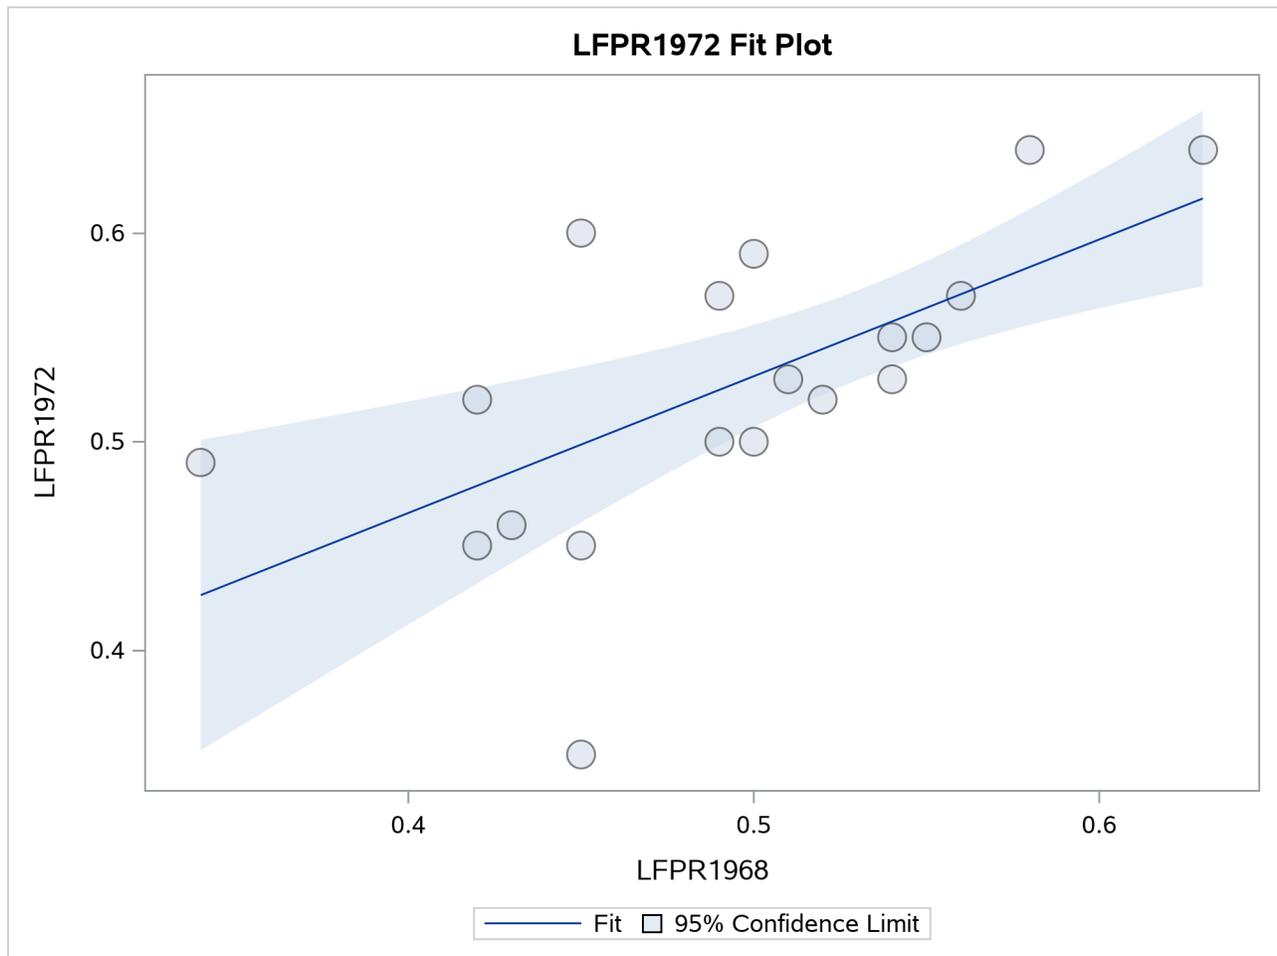

Example 122.2: Cluster Sampling

This example illustrates the use of regression analysis in a simple random cluster sample design. The data are from Särndal, Swensson, and Wretman (1992, p. 652). A total of 284 Swedish municipalities are grouped into 50 clusters of neighboring municipalities. Five clusters with a total of 32 municipalities are randomly selected. The results from the regression analysis in which clusters are used in the sample design are compared to the results of a regression analysis that ignores the clusters. The linear relationship between the population in 1975 and in 1985 is investigated.

The 32 selected municipalities in the sample are saved in the data set `Municipalities`:

```

data Municipalities;
  input Municipality Cluster Population85 Population75;
  datalines;
205 37 5 5
206 37 11 11
207 37 13 13
208 37 8 8
209 37 17 19
6 2 16 15
7 2 70 62
8 2 66 54
9 2 12 12
10 2 60 50
94 17 7 7
95 17 16 16
96 17 13 11
97 17 12 11
98 17 70 67
99 17 20 20
100 17 31 28
101 17 49 48
276 50 6 7
277 50 9 10
278 50 24 26
279 50 10 9
280 50 67 64
281 50 39 35
282 50 29 27
283 50 10 9
284 50 27 31
52 10 7 6
53 10 9 8
54 10 28 27
55 10 12 11
56 10 107 108
;

```

The variable `Municipality` identifies the municipalities in the sample; the variable `Cluster` indicates the cluster to which a municipality belongs; and the variables `Population85` and `Population75` contain the municipality populations in 1985 and in 1975 (in thousands), respectively. A regression analysis is performed by PROC SURVEYREG with a `CLUSTER` statement:

```

title1 'Regression Analysis for Swedish Municipalities';
title2 'Cluster Sampling';
proc surveyreg data=Municipalities total=50;
  cluster Cluster;
  model Population85=Population75;
run;

```

The TOTAL=50 option specifies the total number of clusters in the sampling frame.

Output 122.2.1 displays the data and design summary. Since the sample design includes clusters, the procedure displays the total number of clusters in the sample in the “Design Summary” table.

Output 122.2.1 Regression Analysis for Cluster Sampling

Regression Analysis for Swedish Municipalities Cluster Sampling

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Population85

Data Summary	
Number of Observations	32
Mean of Population85	27.50000
Sum of Population85	880.00000

Design Summary	
Number of Clusters	5

Output 122.2.2 displays the fit statistics and regression coefficient estimates. In the “Estimated Regression Coefficients” table, the estimated slope for the linear relationship is 1.05, which is significant at the 5% level; but the intercept is not significant. This suggests that a regression line crossing the original can be established between populations in 1975 and in 1985.

Output 122.2.2 Regression Analysis for Cluster Sampling

Fit Statistics	
R-Square	0.9860
Root MSE	3.0488
Denominator DF	4

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	-0.0191292	0.89204053	-0.02	0.9839
Population75	1.0546253	0.05167565	20.41	<.0001

Note: The degrees of freedom for the t tests is 4.

The CLUSTER statement is necessary in PROC SURVEYREG in order to incorporate the sample design. If you do not specify a CLUSTER statement in the regression analysis, as in the following statements, the standard deviation of the regression coefficients are incorrectly estimated.

```

title1 'Regression Analysis for Swedish Municipalities';
title2 'Simple Random Sampling';
proc surveyreg data=Municipalities total=284;
  model Population85=Population75;
run;

```

The analysis ignores the clusters in the sample, assuming that the sample design is a simple random sampling. Therefore, the TOTAL= option specifies the total number of municipalities, which is 284.

Output 122.2.3 displays the regression results ignoring the clusters. Compared to the results in Output 122.2.2, the regression coefficient estimates are the same. However, without using clusters, the regression coefficients have a smaller variance estimate, as in Output 122.2.3. By using clusters in the analysis, the estimated regression coefficient for effect Population75 is 1.05, with the estimated standard error 0.05, as displayed in Output 122.2.2; without using the clusters, the estimate is 1.05, but with the estimated standard error 0.04, as displayed in Output 122.2.3. To estimate the variance of the regression coefficients correctly, you should include the clustering information in the regression analysis.

Output 122.2.3 Regression Analysis for Simple Random Sampling

Regression Analysis for Swedish Municipalities Simple Random Sampling

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Population85

Data Summary	
Number of Observations	32
Mean of Population85	27.50000
Sum of Population85	880.00000

Fit Statistics	
R-Square	0.9860
Root MSE	3.0488
Denominator DF	31

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	-0.0191292	0.67417606	-0.03	0.9775
Population75	1.0546253	0.03668414	28.75	<.0001

Note: The degrees of freedom for the t tests is 31.

Example 122.3: Regression Estimator for Simple Random Sample

By using auxiliary information, you can construct regression estimators to provide more accurate estimates of population characteristics. With ESTIMATE statements in PROC SURVEYREG, you can specify a regression estimator as a linear function of the regression parameters to estimate the population total. This example illustrates this application by using the data set Municipalities from [Example 122.2](#).

In this sample, a linear model between the Swedish populations in 1975 and in 1985 is established:

$$\text{Population85} = \alpha + \beta * \text{Population75} + \text{error}$$

Assuming that the total population in 1975 is known to be 8200 (in thousands), you can use the ESTIMATE statement to predict the 1985 total population by using the following statements:

```

title1 'Regression Analysis for Swedish Municipalities';
title2 'Estimate Total Population';
proc surveyreg data=Municipalities total=50;
  cluster Cluster;
  model Population85=Population75;
  estimate '1985 population' Intercept 284 Population75 8200;
run;

```

Since each observation in the sample is a municipality and there is a total of 284 municipalities in Sweden, the coefficient for Intercept (α) in the ESTIMATE statement is 284 and the coefficient for Population75 (β) is the total population in 1975 (8.2 million).

[Output 122.3.1](#) displays the regression results and the estimation of the total population. By using the linear model, you can predict the total population in 1985 to be 8.64 million, with a standard error of 0.26 million.

Output 122.3.1 Use the Regression Estimator to Estimate the Population Total

Regression Analysis for Swedish Municipalities Estimate Total Population

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Population85

Label	Estimate		DF	t Value	Pr > t
	Estimate	Standard Error			
1985 population	8642.49	258.56	4	33.43	<.0001

Example 122.4: Stratified Sampling

This example illustrates the use of the SURVEYREG procedure to perform a regression in a stratified sample design. Consider a population of 235 farms producing corn in Nebraska and Iowa. You are interested in the relationship between corn yield (CornYield) and total farm size (FarmArea).

Each state is divided into several regions, and each region is used as a stratum. Within each stratum, a simple random sample with replacement is drawn. A total of 19 farms is selected by using a stratified simple random sample. The sample size and population size within each stratum are displayed in Table 122.11.

Table 122.11 Number of Farms in Each Stratum

Stratum	State	Region	Number of Farms	
			Population	Sample
1	Iowa	1	100	3
2		2	50	5
3		3	15	3
4	Nebraska	1	30	6
5		2	40	2
Total			235	19

The following three models are considered:

- Model I — Common intercept and slope:

$$\text{Corn Yield} = \alpha + \beta * \text{Farm Area}$$

- Model II — Common intercept, different slope:

$$\text{Corn Yield} = \begin{cases} \alpha + \beta_{\text{Iowa}} * \text{Farm Area} & \text{if the farm is in Iowa} \\ \alpha + \beta_{\text{Nebraska}} * \text{Farm Area} & \text{if the farm is in Nebraska} \end{cases}$$

- Model III — Different intercept and different slope:

$$\text{Corn Yield} = \begin{cases} \alpha_{\text{Iowa}} + \beta_{\text{Iowa}} * \text{Farm Area} & \text{if the farm is in Iowa} \\ \alpha_{\text{Nebraska}} + \beta_{\text{Nebraska}} * \text{Farm Area} & \text{if the farm is in Nebraska} \end{cases}$$

Data from the stratified sample are saved in the SAS data set Farms. The variable Weight contains the sampling weights, which are reciprocals of the selection probabilities.

```
data Farms;
  input State $ Region FarmArea CornYield Weight;
  datalines;
Iowa      1 100  54 33.333
Iowa      1  83  25 33.333
Iowa      1  25  10 33.333
Iowa      2 120  83 10.000
Iowa      2  50  35 10.000
```

```

Iowa      2 110 65 10.000
Iowa      2 60 35 10.000
Iowa      2 45 20 10.000
Iowa      3 23 5 5.000
Iowa      3 10 8 5.000
Iowa      3 350 125 5.000
Nebraska  1 130 20 5.000
Nebraska  1 245 25 5.000
Nebraska  1 150 33 5.000
Nebraska  1 263 50 5.000
Nebraska  1 320 47 5.000
Nebraska  1 204 25 5.000
Nebraska  2 80 11 20.000
Nebraska  2 48 8 20.000
;

```

The SAS data set `StratumTotals` contains the stratum population sizes.

```

data StratumTotals;
  input State $ Region _TOTAL_;
  datalines;
Iowa      1 100
Iowa      2 50
Iowa      3 15
Nebraska  1 30
Nebraska  2 40
;

```

Using the sample data from the data set `Farms` and the control information data from the data set `StratumTotals`, you can fit Model I by using the following statements in `PROC SURVEYREG`:

```

ods graphics on;
title1 'Analysis of Farm Area and Corn Yield';
title2 'Model I: Same Intercept and Slope';
proc surveyreg data=Farms total=StratumTotals;
  strata State Region / list;
  model CornYield = FarmArea / covB;
  weight Weight;
run;

```

[Output 122.4.1](#) displays the data summary and stratification information fitting Model I. The sampling rates are automatically computed by the procedure based on the sample sizes and the population totals in strata.

Output 122.4.1 Data Summary and Stratum Information Fitting Model I**Analysis of Farm Area and Corn Yield
Model I: Same Intercept and Slope****The SURVEYREG Procedure****Regression Analysis for Dependent Variable CornYield**

Data Summary	
Number of Observations	19
Sum of Weights	234.99900
Weighted Mean of CornYield	31.56029
Weighted Sum of CornYield	7416.6

Design Summary	
Number of Strata	5

Fit Statistics	
R-Square	0.3882
Root MSE	20.6422
Denominator DF	14

Stratum Information						
Stratum Index	State	Region	N Obs	Population Total	Sampling Rate	
1	Iowa	1	3	100	3.00%	
2		2	5	50	10.0%	
3		3	3	15	20.0%	
4	Nebraska	1	6	30	20.0%	
5		2	2	40	5.00%	

Output 122.4.2 displays tests of model effects and the estimated regression coefficients.

Output 122.4.2 Estimated Regression Coefficients and the Estimated Covariance Matrix

Tests of Model Effects			
Effect	Num DF	F Value	Pr > F
Model	1	21.74	0.0004
Intercept	1	4.93	0.0433
FarmArea	1	21.74	0.0004

Note: The denominator degrees of freedom for the F tests is 14.

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	11.8162978	5.31981027	2.22	0.0433
FarmArea	0.2126576	0.04560949	4.66	0.0004


Note: The degrees of freedom for the t tests is 14.

Output 122.4.2 *continued*

Covariance of Estimated Regression Coefficients		
	Intercept	FarmArea
Intercept	28.300381277	-0.146471538
FarmArea	-0.146471538	0.0020802259

Output 122.4.3 displays the fit of the regression.

Output 122.4.3 Regression Fitting

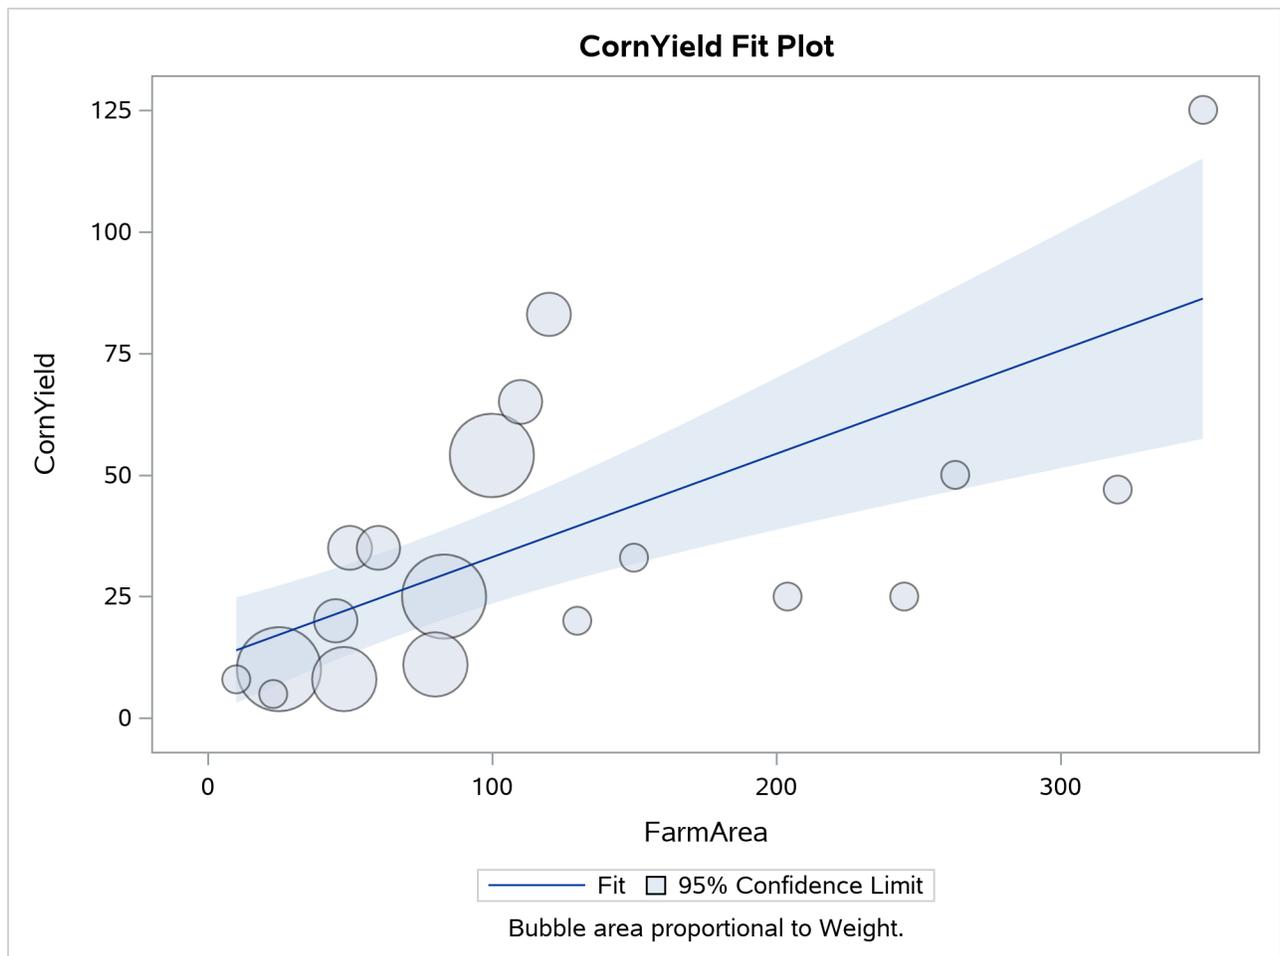

Alternatively, you can assume that the linear relationship between corn yield (CornYield) and farm area (FarmArea) is different among the states (Model II). In order to analyze the data by using this model, you create auxiliary variables FarmAreaNE and FarmAreaIA to represent farm area in different states:

$$\text{FarmAreaNE} = \begin{cases} 0 & \text{if the farm is in Iowa} \\ \text{FarmArea} & \text{if the farm is in Nebraska} \end{cases}$$

$$\text{FarmAreaIA} = \begin{cases} \text{FarmArea} & \text{if the farm is in Iowa} \\ 0 & \text{if the farm is in Nebraska} \end{cases}$$

The following statements create these variables in a new data set called FarmsByState and use PROC SURVEYREG to fit Model II:

```
data FarmsByState;
  set Farms;
  if State='Iowa' then do;
    FarmAreaIA=FarmArea;
    FarmAreaNE=0;
  end;

  else do;
    FarmAreaIA=0;
    FarmAreaNE=FarmArea;
  end;
run;
```

The following statements perform the regression by using the new data set FarmsByState. The analysis uses the auxiliary variables FarmAreaIA and FarmAreaNE as the regressors:

```
title1 'Analysis of Farm Area and Corn Yield';
title2 'Model II: Same Intercept, Different Slopes';
proc surveyreg data=FarmsByState total=StratumTotals;
  strata State Region;
  model CornYield = FarmAreaIA FarmAreaNE / covB;
  weight Weight;
run;
```

Output 122.4.4 displays the fit statistics and parameter estimates. The estimated slope parameters for each state are quite different from the estimated slope in Model I. The results from the regression show that Model II fits these data better than Model I.

Output 122.4.4 Regression Results from Fitting Model II

Analysis of Farm Area and Corn Yield Model II: Same Intercept, Different Slopes

The SURVEYREG Procedure

Regression Analysis for Dependent Variable CornYield

Fit Statistics	
R-Square	0.8158
Root MSE	11.6759
Denominator DF	14

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	4.04234816	3.80934848	1.06	0.3066
FarmAreaIA	0.41696069	0.05971129	6.98	<.0001
FarmAreaNE	0.12851012	0.02495495	5.15	0.0001

Note: The degrees of freedom for the t tests is 14.

Output 122.4.4 *continued*

Covariance of Estimated Regression Coefficients			
	Intercept	FarmAreaIA	FarmAreaNE
Intercept	14.511135861	-0.118001232	-0.079908772
FarmAreaIA	-0.118001232	0.0035654381	0.0006501109
FarmAreaNE	-0.079908772	0.0006501109	0.0006227496

For Model III, different intercepts are used for the linear relationship in two states. The following statements illustrate the use of the NOINT option in the MODEL statement associated with the CLASS statement to fit Model III:

```

title1 'Analysis of Farm Area and Corn Yield';
title2 'Model III: Different Intercepts and Slopes';
proc surveyreg data=FarmsByState total=StratumTotals;
  strata State Region;
  class State;
  model CornYield = State FarmAreaIA FarmAreaNE / noint covB solution;
  weight Weight;
run;

```

The model statement includes the classification effect State as a regressor. Therefore, the parameter estimates for effect State present the intercepts in two states.

Output 122.4.5 displays the regression results for fitting Model III, including parameter estimates, and covariance matrix of the regression coefficients. The estimated covariance matrix shows a lack of correlation between the regression coefficients from different states. This suggests that Model III might be the best choice for building a model for farm area and corn yield in these two states.

However, some statistics remain the same under different regression models—for example, Weighted Mean of CornYield. These estimators do not rely on the particular model you use.

Output 122.4.5 Regression Results for Fitting Model III

**Analysis of Farm Area and Corn Yield
Model III: Different Intercepts and Slopes**

The SURVEYREG Procedure

Regression Analysis for Dependent Variable CornYield

Fit Statistics	
R-Square	0.9300
Root MSE	11.9810
Denominator DF	14

Output 122.4.5 *continued*

Estimated Regression Coefficients				
Parameter	Estimate	Standard		
		Error	t Value	Pr > t
State Iowa	5.27797099	5.27170400	1.00	0.3337
State Nebraska	0.65275201	1.70031616	0.38	0.7068
FarmAreaIA	0.40680971	0.06458426	6.30	<.0001
FarmAreaNE	0.14630563	0.01997085	7.33	<.0001

Note: The degrees of freedom for the t tests is 14.

Covariance of Estimated Regression Coefficients				
	State			
	State Iowa	Nebraska	FarmAreaIA	FarmAreaNE
State Iowa	27.790863033	0	-0.205517205	0
State Nebraska	0	2.8910750385	0	-0.027354011
FarmAreaIA	-0.205517205	0	0.0041711265	0
FarmAreaNE	0	-0.027354011	0	0.0003988349

Example 122.5: Regression Estimator for Stratified Sample

This example uses the corn yield data set FARMS from [Example 122.4](#) to illustrate how to construct a regression estimator for a stratified sample design.

As in [Example 122.3](#), by incorporating auxiliary information into a regression estimator, the procedure can produce more accurate estimates of the population characteristics that are of interest. In this example, the sample design is a stratified sample design. The auxiliary information is the total farm areas in regions of each state, as displayed in [Table 122.12](#). You want to estimate the total corn yield by using this information under the three linear models given in [Example 122.4](#).

Table 122.12 Information for Each Stratum

Stratum	State	Region	Number of Farms		Total Farm Area
			Population	Sample	
1	Iowa	1	100	3	13,200
2		2	50	5	
3		3	15	3	
4	Nebraska	1	30	6	8,750
5		2	40	2	
Total			235	19	21,950

The regression estimator to estimate the total corn yield under Model I can be obtained by using PROC SURVEYREG with an ESTIMATE statement:

```

title1 'Estimate Corn Yield from Farm Size';
title2 'Model I: Same Intercept and Slope';
proc surveyreg data=Farms total=StratumTotals;
  strata State Region / list;

```

```
class State Region;
model CornYield = FarmArea State*Region /solution;
weight Weight;
estimate 'Estimate of CornYield under Model I'
        INTERCEPT 235 FarmArea 21950
        State*Region 100 50 15 30 40 /e;
run;
```

To apply the constraint in each stratum that the weighted total number of farms equals to the total number of farms in the stratum, you can include the strata as an effect in the MODEL statement, effect State*Region. Thus, the CLASS statement must list the STRATA variables, State and Region, as classification variables. The following ESTIMATE statement specifies the regression estimator, which is a linear function of the regression parameters:

```
estimate 'Estimate of CornYield under Model I'
        INTERCEPT 235 FarmArea 21950
        State*Region 100 50 15 30 40 /e;
```

This linear function contains the total for each explanatory variable in the model. Because the sampling units are farms in this example, the coefficient for Intercept in the ESTIMATE statement is the total number of farms (235); the coefficient for FarmArea is the total farm area listed in Table 122.12 (21950); and the coefficients for effect State*Region are the total number of farms in each strata (as displayed in Table 122.12).

Output 122.5.1 displays the results of the ESTIMATE statement. The regression estimator for the total of CornYield in Iowa and Nebraska is 7464 under Model I, with a standard error of 927.

Output 122.5.1 Regression Estimator for the Total of CornYield under Model I

**Estimate Corn Yield from Farm Size
Model I: Same Intercept and Slope**

The SURVEYREG Procedure

Regression Analysis for Dependent Variable CornYield

Label	Estimate		DF	t Value	Pr > t
	Estimate	Standard Error			
Estimate of CornYield under Model I	7463.52	926.84	14	8.05	<.0001

Under Model II, a regression estimator for totals can be obtained by using the following statements:

```
title1 'Estimate Corn Yield from Farm Size';
title2 'Model II: Same Intercept, Different Slopes';
proc surveyreg data=FarmsByState total=StratumTotals;
  strata State Region;
  class State Region;
  model CornYield = FarmAreaIA FarmAreaNE
                state*region /solution;
  weight Weight;
  estimate 'Total of CornYield under Model II'
        INTERCEPT 235 FarmAreaIA 13200 FarmAreaNE 8750
        State*Region 100 50 15 30 40 /e;
run;
```

In this model, you also need to include strata as a fixed effect in the MODEL statement. Other regressors are the auxiliary variables FarmAreaIA and FarmAreaNE (defined in Example 122.4). In the following ESTIMATE statement, the coefficient for Intercept is still the total number of farms; and the coefficients for FarmAreaIA and FarmAreaNE are the total farm area in Iowa and Nebraska, respectively, as displayed in Table 122.12. The total number of farms in each strata are the coefficients for the strata effect:

```
estimate 'Total of CornYield under Model II'
      INTERCEPT 235 FarmAreaIA 13200 FarmAreaNE 8750
      State*Region 100 50 15 30 40 /e;
```

Output 122.5.2 displays that the results of the regression estimator for the total of corn yield in two states under Model II is 7580 with a standard error of 859. The regression estimator under Model II has a slightly smaller standard error than under Model I.

Output 122.5.2 Regression Estimator for the Total of CornYield under Model II

Estimate Corn Yield from Farm Size Model II: Same Intercept, Different Slopes

The SURVEYREG Procedure

Regression Analysis for Dependent Variable CornYield

Label	Estimate		DF	t Value	Pr > t
	Estimate	Standard Error			
Total of CornYield under Model II	7580.49	859.18	14	8.82	<.0001

Finally, you can apply Model III to the data and estimate the total corn yield. Under Model III, you can also obtain the regression estimators for the total corn yield for each state. Three ESTIMATE statements are used in the following statements to create the three regression estimators:

```
title1 'Estimate Corn Yield from Farm Size';
title2 'Model III: Different Intercepts and Slopes';
proc surveyreg data=FarmsByState total=StratumTotals;
  strata State Region;
  class State Region;
  model CornYield = state FarmAreaIA FarmAreaNE
    State*Region /noint solution;
  weight Weight;
  estimate 'Total CornYield in Iowa under Model III'
    State 165 0 FarmAreaIA 13200 FarmAreaNE 0
    State*region 100 50 15 0 0 /e;
  estimate 'Total CornYield in Nebraska under Model III'
    State 0 70 FarmAreaIA 0 FarmAreaNE 8750
    State*Region 0 0 0 30 40 /e;
  estimate 'Total CornYield in both states under Model III'
    State 165 70 FarmAreaIA 13200 FarmAreaNE 8750
    State*Region 100 50 15 30 40 /e;
run;
```

The fixed effect State is added to the MODEL statement to obtain different intercepts in different states, by using the NOINT option. Among the ESTIMATE statements, the coefficients for explanatory variables are

different depending on which regression estimator is estimated. For example, in the ESTIMATE statement

```
estimate 'Total CornYield in Iowa under Model III'
        State 165 0 FarmAreaIA 13200 FarmAreaNE 0
        State*region 100 50 15 0 0 /e;
```

the coefficients for the effect State are 165 and 0, respectively. This indicates that the total number of farms in Iowa is 165 and the total number of farms in Nebraska is 0, because the estimation is the total corn yield in Iowa only. Similarly, the total numbers of farms in three regions in Iowa are used for the coefficients of the strata effect State*Region, as displayed in [Table 122.12](#).

[Output 122.5.3](#) displays the results from the three regression estimators by using Model III. Since the estimations are independent in each state, the total corn yield from both states is equal to the sum of the estimated total of corn yield in Iowa and Nebraska, $6246 + 1334 = 7580$. This regression estimator is the same as the one under Model II. The variance of regression estimator of the total corn yield in both states is the sum of variances of regression estimators for total corn yield in each state. Therefore, it is not necessary to use Model III to obtain the regression estimator for the total corn yield unless you need to estimate the total corn yield for each individual state.

Output 122.5.3 Regression Estimator for the Total of CornYield under Model III

Estimate Corn Yield from Farm Size Model III: Different Intercepts and Slopes

The SURVEYREG Procedure

Regression Analysis for Dependent Variable CornYield

Label	Estimate		Standard		
	Estimate	Error	DF	t Value	Pr > t
Total CornYield in Iowa under Model III	6246.11	851.27	14	7.34	<.0001

Example 122.6: Stratum Collapse

In a stratified sample, it is possible that some strata might have only one sampling unit. When this happens, PROC SURVEYREG collapses the strata that contain a single sampling unit into a pooled stratum. For more detailed information about stratum collapse, see the section “[Stratum Collapse](#)” on page 10123.

Suppose that you have the following data:

```
data Sample;
  input Stratum X Y W;
  datalines;
10 0 0 5
10 1 1 5
11 1 1 10
11 1 2 10
12 3 3 16
33 4 4 45
14 6 7 50
12 3 4 16
```

;

The variable Stratum is again the stratification variable, the variable X is the independent variable, and the variable Y is the dependent variable. You want to regress Y on X. In the data set Sample, both Stratum=33 and Stratum=14 contain one observation. By default, PROC SURVEYREG collapses these strata into one pooled stratum in the regression analysis.

To input the finite population correction information, you create the SAS data set StratumTotals:

```
data StratumTotals;
  input Stratum _TOTAL_;
  datalines;
10 10
11 20
12 32
33 40
33 45
14 50
15 .
66 70
;
```

The variable Stratum is the stratification variable, and the variable _TOTAL_ contains the stratum totals. The data set StratumTotals contains more strata than the data set Sample. Also in the data set StratumTotals, more than one observation contains the stratum totals for Stratum=33:

```
33 40
33 45
```

PROC SURVEYREG allows this type of input. The procedure simply ignores strata that are not present in the data set Sample; for the multiple entries of a stratum, the procedure uses the first observation. In this example, Stratum=33 has the stratum total _TOTAL_=40.

The following SAS statements perform the regression analysis:

```
title1 'Stratified Sample with Single Sampling Unit in Strata';
title2 'With Stratum Collapse';
proc surveyreg data=Sample total=StratumTotals;
  strata Stratum/list;
  model Y=X;
  weight W;
run;
```

Output 122.6.1 shows that there are a total of five strata in the input data set and two strata are collapsed into a pooled stratum. The denominator degrees of freedom is 4, due to the collapse (see the section “Denominator Degrees of Freedom” on page 10132).

Output 122.6.1 Summary of Data and Regression

Stratified Sample with Single Sampling Unit in Strata With Stratum Collapse

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Y

Data Summary	
Number of Observations	8
Sum of Weights	157.00000
Weighted Mean of Y	4.31210
Weighted Sum of Y	677.00000

Design Summary	
Number of Strata	5
Number of Strata Collapsed	2

Fit Statistics	
R-Square	0.9564
Root MSE	0.5111
Denominator DF	4

Output 122.6.2 displays the stratification information, including stratum collapse. Under the column Collapsed, the fourth stratum (Stratum=14) and the fifth (Stratum=33) are marked as ‘Yes,’ which indicates that these two strata are collapsed into the pooled stratum (Stratum Index=0). The sampling rate for the pooled stratum is 2% (see the section “Sampling Rate of the Pooled Stratum from Collapse” on page 10123).

Output 122.6.3 displays the parameter estimates and the tests of the significance of the model effects.

Output 122.6.2 Stratification Information

Stratum Information					
Stratum Index	Collapsed	Stratum	N Obs	Population Total	Sampling Rate
1		10	2	10	20.0%
2		11	2	20	10.0%
3		12	2	32	6.25%
4	Yes	14	1	50	2.00%
5	Yes	33	1	40	2.50%
0	Pooled		2	90	2.22%

Note: Strata with only one observation are collapsed into the stratum with Stratum Index "0".

Output 122.6.3 Parameter Estimates and Effect Tests

Tests of Model Effects			
Effect	Num DF	F Value	Pr > F
Model	1	173.01	0.0002
Intercept	1	0.00	0.9961
X	1	173.01	0.0002

Note: The denominator degrees of freedom for the F tests is 4.

Estimated Regression Coefficients				
Parameter	Estimate	Standard		
		Error	t Value	Pr > t
Intercept	0.00179469	0.34306373	0.01	0.9961
X	1.12598708	0.08560466	13.15	0.0002

Note: The degrees of freedom for the t tests is 4.

Alternatively, if you prefer not to collapse strata with a single sampling unit, you can specify the NOCOLLAPSE option in the STRATA statement:

```

title1 'Stratified Sample with Single Sampling Unit in Strata';
title2 'Without Stratum Collapse';
proc surveyreg data=Sample total=StratumTotals;
  strata Stratum/list nocollapse;
  model Y = X;
  weight W;
run;

```

Output 122.6.4 does not contain the stratum collapse information displayed in Output 122.6.1, and the denominator degrees of freedom are 3 instead of 4.

Output 122.6.4 Summary of Data and Regression

**Stratified Sample with Single Sampling Unit in Strata
Without Stratum Collapse**

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Y

Data Summary	
Number of Observations	8
Sum of Weights	157.00000
Weighted Mean of Y	4.31210
Weighted Sum of Y	677.00000

Design Summary	
Number of Strata	5

Fit Statistics	
R-Square	0.9564
Root MSE	0.5111
Denominator DF	3

In [Output 122.6.5](#), although the fourth stratum and the fifth stratum contain only one observation, no stratum collapse occurs.

Output 122.6.5 Stratification Information

Stratum Information				
Stratum Index	Stratum	N Obs	Population Total	Sampling Rate
1	10	2	10	20.0%
2	11	2	20	10.0%
3	12	2	32	6.25%
4	14	1	50	2.00%
5	33	1	40	2.50%

As a result of not collapsing strata, the standard error estimates of the parameters, shown in [Output 122.6.6](#), are different from those in [Output 122.6.3](#), as are the tests of the significance of model effects.

Output 122.6.6 Parameter Estimates and Effect Tests

Tests of Model Effects			
Effect	Num DF	F Value	Pr > F
Model	1	347.27	0.0003
Intercept	1	0.00	0.9962
X	1	347.27	0.0003

Note: The denominator degrees of freedom for the F tests is 3.

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	0.00179469	0.34302581	0.01	0.9962
X	1.12598708	0.06042241	18.64	0.0003

Note: The degrees of freedom for the t tests is 3.

Example 122.7: Domain Analysis

You can use PROC SURVEYREG to perform domain analysis in a subgroup of your interest. To illustrate, this example uses a data set from the National Health and Nutrition Examination Survey I (NHANES I) Epidemiologic Followup Study (NHEFS), described in [Example 121.2](#) in Chapter 121, “[The SURVEYPHREG Procedure](#).”

The NHEFS is a national longitudinal survey that is conducted by the National Center for Health Statistics, the National Institute on Aging, and some other agencies of the Public Health Service in the United States. Some important objectives of this survey are to determine the relationships between clinical, nutritional, and behavioral factors; to determine the relationship between mortality and hospital utilization; and to monitor changes in risk factors for the initial cohort that represents the NHANES I population. A cohort of size 14,407, which includes all persons 25 to 74 years old who completed a medical examination at NHANES I in 1971–1975, was selected for the NHEFS. Personal interviews were conducted for every selected unit during the first wave of data collection from the year 1982 to 1984. Follow-up studies were conducted in 1986, 1987, and 1992. In the year 1986, only nondeceased persons 55 to 74 years old (as reported in the

base year survey) were interviewed. The 1987 and 1992 NHEFS contain the entire nondeceased NHEFS cohort. Vital and tracing status data, interview data, health care facility stay data, and mortality data for all four waves are available for public use. For more information about the survey and the data sets, see the Center of Disease Control and Prevention's website (<http://www.cdc.gov/>).

For illustration purposes, 1,018 observations from the 1987 NHEFS public use interview data are used to create the data set `cancer`. The observations are obtained from 10 strata that contain 596 PSUs. The sum of observation weights for these selected units is over 19 million. Observation weights range from 359 to 129,359 with a mean of 18,747.69 and a median of 11,414.

The following variables are used in this example:

- `ObsNo`, unit identification
- `Strata`, stratum identification
- `PSU`, identification for primary sampling units
- `ObservationWt`, sampling weight associated with each unit
- `Age`, the event-time variable, defined as follows:
 - age of the subject when the first cancer was reported for subjects with reported cancer
 - age of the subject at death for deceased subjects without reported cancer
 - age of the subject as reported in 1987 follow-up (this value is used for nondeceased subjects who never reported cancer)
 - age of the subject for the entry year 1971–1975 survey if the subject has cancer (or is deceased) but the date of incident is not reported
- `Cancer`, cancer indicator (1 = cancer reported, 0 = cancer not reported)
- `BodyWeight`, body weight of the subject as reported in the 1987 follow-up, or an imputed body weight based on the subject's age in the entry year 1971–1975 survey

The following SAS statements create the data set `cancer`. Note that `BodyWeight` for a few observations (8%) is imputed based on `Age` by using a deterministic regression imputation model (Särndal and Lundström (2005, chapter 12)). The imputed values are treated as observed values in this example. In other words, this example treats the data set `Cancer` as the observed data set.

```
data cancer;
  input ObsNo Strata PSU ObservationWt Age Cancer BodyWeight;
  datalines;
  1 3 002 3805 53 1 175
  2 3 002 6107 77 0 175
  3 3 039 2968 50 0 160
  4 3 084 30438 52 0 145
  5 3 007 5081 80 0 127

  ... more lines ...

1016 4 002 2689 40 0 120
1017 4 092 45888 52 0 166
```

```
1018 4 035 4347 58 0 156
;
```

Suppose you want to study how aging affects body weight in the subgroup of cancer patients for the base year survey population. Because whether an individual has cancer or not is unrelated to the design of the sample, this kind of analysis is called domain analysis (subgroup analysis).

The following statements request a linear regression of BodyWeight on Age among cancer patients. The STRATA, CLUSTER, and WEIGHT statements identify the variance strata, PSUs, and analysis weights, respectively. The DOMAIN statement defines the subgroups of people who have been diagnosed with cancer and people who do not have cancer. The option ('1') after the DOMAIN variable Cancer requests that the procedure display only the analysis in the subgroup Cancer=1 in the output. The PLOT= option in the PROC statement requests that weights be represented as a heat map with hexagonal bins.

```
title1 'Study of Body Weight and Age among Cancer Patients';
ods graphics on;
proc surveyreg data=cancer plot=fit(weight=heatmap shape=hex);
  strata strata;
  cluster psu;
  weight ObservationWt;
  model bodyweight = age;
  domain cancer ('1');
run;
```

Output 122.7.1 gives a summary of the data and the parameter estimates of the linear regression in the domain Cancer=1. The analysis indicates that aging does not significantly affect body weight among cancer patients.

Output 122.7.1 Domain Analysis among Cancer Patients

Study of Body Weight and Age among Cancer Patients

The SURVEYREG Procedure

Cancer=1

Domain Regression Analysis for Variable BodyWeight


Domain Summary	
Number of Observations	1017
Number of Observations in Domain	119
Number of Observations Not in Domain	898
Sum of Weights in Domain	2211545.0
Weighted Mean of BodyWeight	164.87655
Weighted Sum of BodyWeight	364631909

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	189.614789	14.9467889	12.69	<.0001
Age	-0.398556	0.2398447	-1.66	0.0971

Note: The degrees of freedom for the t tests is 586.

When ODS Graphics is enabled and the model contains a single continuous regressor, PROC SURVEYREG displays a plot of the model fitting, which is shown in Figure 122.7.2.

Output 122.7.2 Regression Fitting

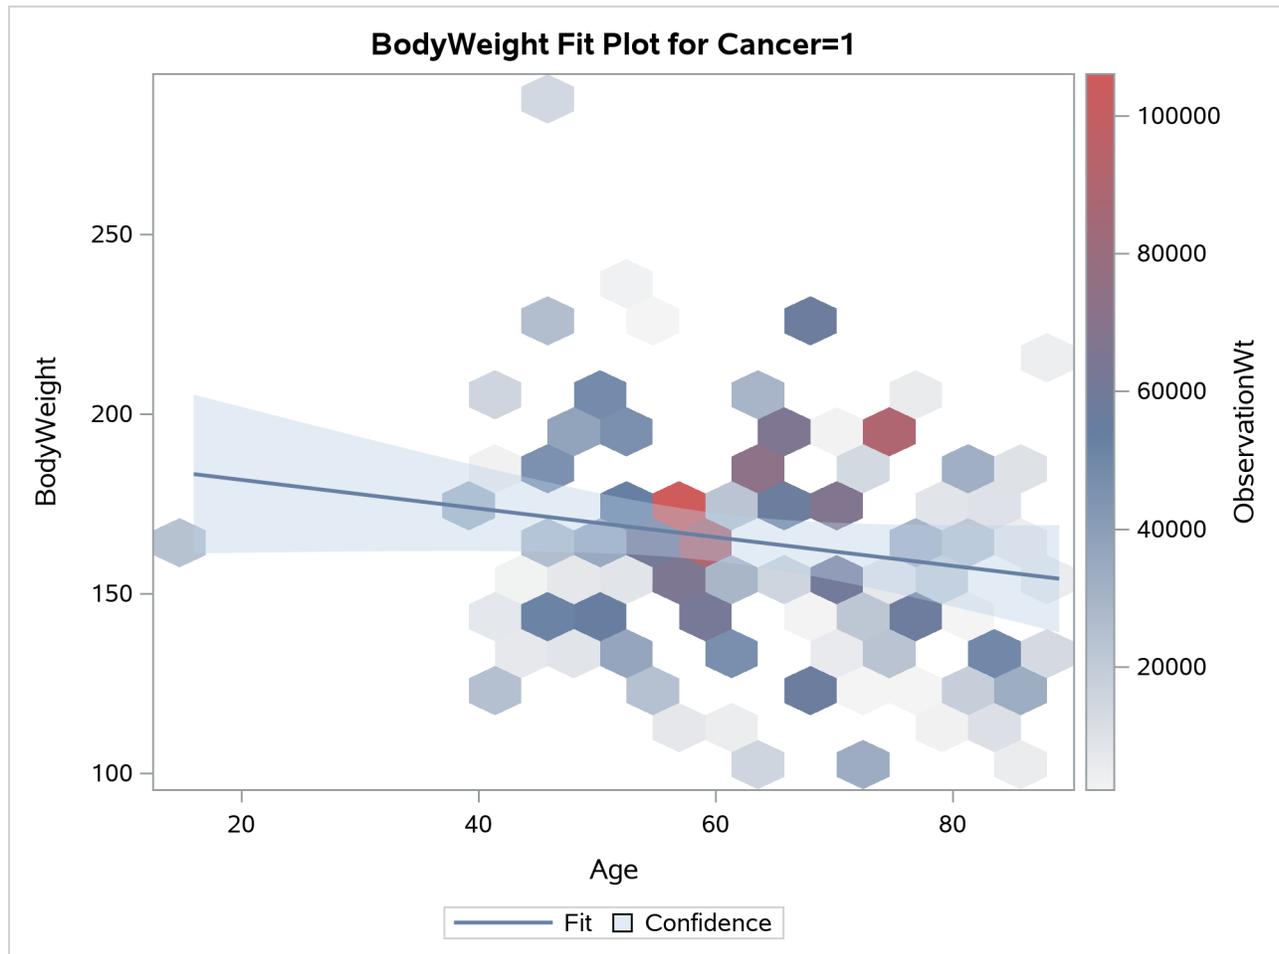

Example 122.8: Comparing Domain Statistics

Recall the example in the section “Getting Started: SURVEYREG Procedure” on page 10083, which analyzed a stratified simple random sample from a junior high school to examine how household income and the number of children in a household affect students’ average weekly spending for ice cream. You can use the same sample to analyze the average weekly spending among male and female students. Because student gender is unrelated to the design of the sample, this kind of analysis is called domain analysis (subgroup analysis).

The data set follows:

```
data IceCreamDataDomain;
  input Grade Spending Income Gender$ @@;
  datalines;
7 7 39 M 7 7 38 F 8 12 47 F
9 10 47 M 7 1 34 M 7 10 43 M
7 3 44 M 8 20 60 F 8 19 57 M
7 2 35 M 7 2 36 F 9 15 51 F
```

```

8 16 53 F 7 6 37 F 7 6 41 M
7 6 39 M 9 15 50 M 8 17 57 F
8 14 46 M 9 8 41 M 9 8 41 F
9 7 47 F 7 3 39 F 7 12 50 M
7 4 43 M 9 14 46 F 8 18 58 M
9 9 44 F 7 2 37 F 7 1 37 M
7 4 44 M 7 11 42 M 9 8 41 M
8 10 42 M 8 13 46 F 7 2 40 F
9 6 45 F 9 11 45 M 7 2 36 F
7 9 46 F
;
data IceCreamDataDomain;
  set IceCreamDataDomain;
  if Grade=7 then Prob=20/1824;
  if Grade=8 then Prob=9/1025;
  if Grade=9 then Prob=11/1151;
  Weight=1/Prob;
run;
data StudentTotals;
  input Grade _TOTAL_;
  datalines;
7 1824
8 1025
9 1151
;

```

In the data set `IceCreamDataDomain`, the variable `Grade` indicates a student's grade, which is the stratification variable. The variable `Spending` contains the dollar amount of each student's average weekly spending for ice cream. The variable `Income` specifies the household income, in thousands of dollars. The variable `Gender` indicates a student's gender. The sampling weights are created by using the reciprocals of the probabilities of selection.

In the data set `StudentTotals`, the variable `Grade` is the stratification variable, and the variable `_TOTAL_` contains the total numbers of students in the strata in the survey population.

Suppose that you are now interested in estimating the gender domain means of weekly ice cream spending (that is, the average spending for males and females, respectively). You can use the `SURVEYMEANS` procedure to produce these domain statistics by using the following statements:

```

proc surveymeans data=IceCreamDataDomain total=StudentTotals;
  strata Grade;
  var spending;
  domain Gender;
  weight Weight;
run;

```

Output 122.8.1 shows the estimated spending among male and female students.

Output 122.8.1 Estimated Domain Means
The SURVEYMEANS Procedure

Statistics for Gender Domains					
Gender	Variable	N	Mean	Std Error of Mean	95% CL for Mean
F	Spending	19	9.376111	1.077927	7.19202418 11.5601988
M	Spending	21	8.923052	1.003423	6.88992385 10.9561807

You can also use PROC SURVEYREG to estimate these domain means. The benefit of this alternative approach is that PROC SURVEYREG provides more tools for additional analysis, such as domain means comparisons in a LSMEANS statement.

Suppose that you want to test whether there is a significant difference for the ice cream spending between male and female students. You can use the following statements to perform the test:

```

title1 'Ice Cream Spending Analysis';
title2 'Compare Domain Statistics';
proc surveyreg data=IceCreamDataDomain total=StudentTotals;
  strata Grade;
  class Gender;
  model Spending = Gender / vadjust=none;
  lsmeans Gender / diff;
  weight Weight;
run;

```

The variable Gender is used as a model effect. The `VADJUST=NONE` option is used to produce variance estimates for domain means that are identical to those produced by PROC SURVEYMEANS. The `LSMEANS` statement requests that PROC SURVEYREG estimate the average spending in each gender group. The `DIFF` option requests that the procedure compute the difference among domain means.

Output 122.8.2 displays the estimated weekly spending on ice cream among male and female students, respectively, and their standard errors. Female students spend \$9.38 per week on average, and male students spend \$8.92 per week on average. These domain means, including their standard errors, are identical to those in Output 122.8.1 which are produced by PROC SURVEYMEANS.

Output 122.8.2 Domain Means between Gender

**Ice Cream Spending Analysis
Compare Domain Statistics**

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Spending

Gender Least Squares Means					
Gender	Estimate	Standard Error	DF	t Value	Pr > t
F	9.3761	1.0779	37	8.70	<.0001
M	8.9231	1.0034	37	8.89	<.0001

Output 122.8.3 shows the estimated difference for weekly ice cream spending between the two gender

groups. The female students spend \$0.45 more than male students on average, and the difference is not statistically significant based on the t test.

Output 122.8.3 Domain Means Comparison

Differences of Gender Least Squares Means						
Gender	_Gender	Estimate	Standard Error	DF	t Value	Pr > t
F	M	0.4531	1.7828	37	0.25	0.8008

If you want to investigate whether there is any significant difference in ice cream spending among grades, you can use the following similar statements to compare:

```
ods graphics on;
title1 'Ice Cream Spending Analysis';
title2 'Compare Domain Statistics';
proc surveyreg data=IceCreamDataDomain total=StudentTotals;
  strata Grade;
  class Grade;
  model Spending = Grade / vadjust=none;
  lsmeans Grade / diff plots=(diff meanplot(cl));
  weight Weight;
run;
```

The `Grade` is specified in the `CLASS` statement to be used as an effect in the `MODEL` statement. The `DIFF` option in the `LSMEANS` statement requests that the procedure compute the difference among the domain means for the effect `Grade`. The `ODS GRAPHICS` statement enables ODS to create graphics. The `PLOTS=(DIFF MEANPLOT(CL))` option requests two graphics: the domain means plot `MeanPlot` and their pairwise difference plot `DiffPlot`. The `CL` suboption requests the `MeanPlot` to display confidence. For information about ODS Graphics, see Chapter 23, “Statistical Graphics Using ODS.”

Output 122.8.4 shows the estimated weekly spending on ice cream for students within each grade. Students in Grade 7 spend the least, only \$5.00 per week. Students in Grade 8 spend the most, \$15.44 per week. Students in Grade 9 spend a little less at \$10.09 per week.

Output 122.8.4 Domain Means among Grades


Ice Cream Spending Analysis Compare Domain Statistics

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Spending

Grade Least Squares Means						
Grade	Estimate	Standard Error	DF	t Value	Pr > t	
7	5.0000	0.7636	37	6.55	<.0001	
8	15.4444	1.1268	37	13.71	<.0001	
9	10.0909	0.9719	37	10.38	<.0001	

Output 122.8.5 plots the weekly spending results that are shown in Output 122.8.4.

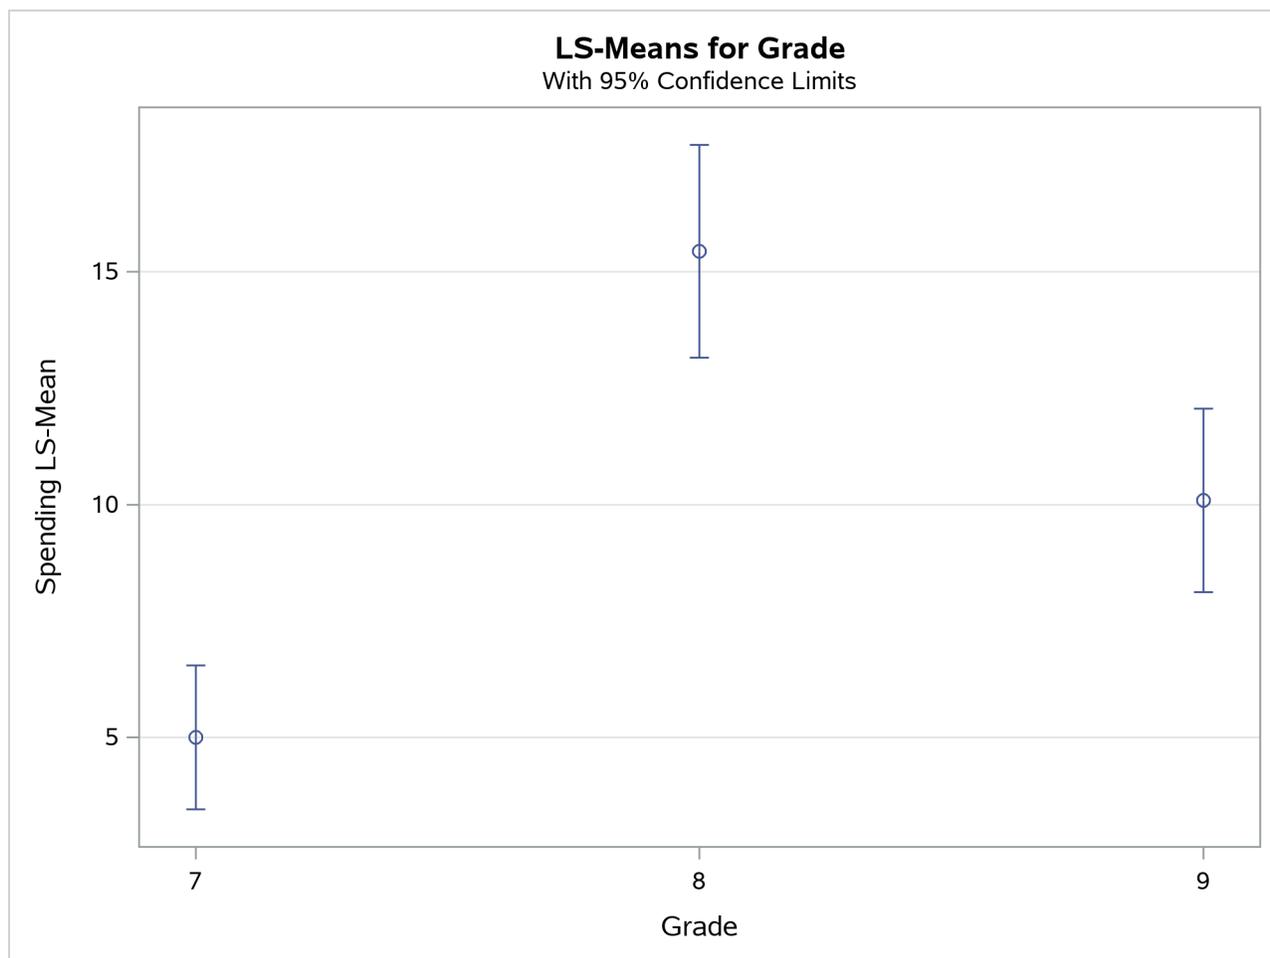
Output 122.8.5 Plot of Means of Ice Cream Spending within Grades

Output 122.8.6 displays pairwise comparisons for weekly ice cream spending among grades. All the differences are significant based on t tests.

Output 122.8.6 Domain Means Comparison

Differences of Grade Least Squares Means						
Grade	_Grade	Estimate	Standard Error	DF	t Value	Pr > t
7	8	-10.4444	1.3611	37	-7.67	<.0001
7	9	-5.0909	1.2360	37	-4.12	0.0002
8	9	5.3535	1.4880	37	3.60	0.0009

Output 122.8.7 plots the comparisons that are shown in Output 122.8.6.

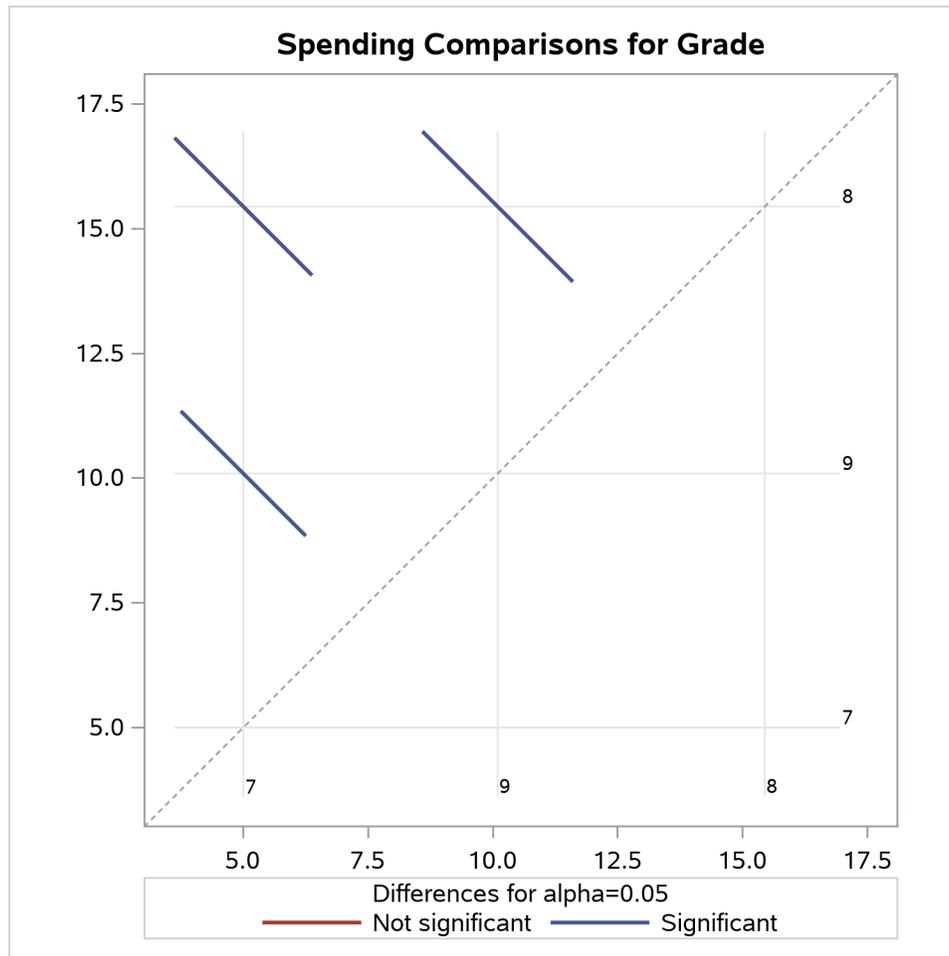Output 122.8.7 Plot of Pairwise Comparisons of Spending among Grades

In [Output 122.8.7](#), the spending for each grade is shown in the background grid on both axes. Comparisons for each pair of domain means are shown by colored bars at intersections of these grids. The length of each bar represents the width of the confidence intervals for the corresponding difference between domain means. The significance of these pairwise comparisons are indicated in the plot by whether these bars cross the 45-degree background dash-line across the plot. Since none of the three bars cross the dash-line, all pairwise comparisons are significant, as shown in [Output 122.8.6](#).

Example 122.9: Variance Estimate Using the Jackknife Method

This example uses the stratified sample from the section “Getting Started: SURVEYREG Procedure” on page 10083 to illustrate how to estimate the variances with replication methods.

As shown in the section “Stratified Sampling” on page 10085, the sample is saved in the SAS data set IceCream. The variable Grade that indicates a student’s grade is the stratification variable. The variable Spending contains the dollar amount of each student’s average weekly spending for ice cream. The variable Income specifies the household income, in thousands of dollars. The variable Kids indicates how many children are in a student’s family. The variable Weight contains sampling weights.

In this example, the procedure uses the jackknife method to estimate the variance, saving the replicate weights that PROC SURVEYREG generates in a SAS data set:

```

title1 'Ice Cream Spending Analysis';
title2 'Use the Jackknife Method to Estimate the Variance';
proc surveyreg data=IceCream
    varmethod=JACKKNIFE(outweights=JKWeights);
    strata Grade;
    class Kids;
    model Spending = Income Kids / solution;
    weight Weight;
run;

```

The `VARMETHOD=JACKKNIFE` option requests the procedure to estimate the variance by using the jackknife method. The `OUTWEIGHTS=JKWeights` option provides a SAS data set named JKWeights that contains the replicate weights used in the computation.

Output 122.9.1 shows the summary of the data and the variance estimation method. There are a total of 40 replicates generated by the procedure.

Output 122.9.1 Variance Estimation Using the Jackknife Method

Ice Cream Spending Analysis Use the Jackknife Method to Estimate the Variance

The SURVEYREG Procedure

Regression Analysis for Dependent Variable Spending

Data Summary	
Number of Observations	40
Sum of Weights	4000.0
Weighted Mean of Spending	9.14130
Weighted Sum of Spending	36565.2

Design Summary	
Number of Strata	3

Variance Estimation	
Method	Jackknife
Number of Replicates	40

Output 122.9.2 displays the parameter estimates and their standard errors, as well as the tests of model effects that use the jackknife method.

Output 122.9.2 Variance Estimation Using the Jackknife Method

Tests of Model Effects			
Effect	Num DF	F Value	Pr > F
Model	4	110.48	<.0001
Intercept	1	133.30	<.0001
Income	1	289.16	<.0001
Kids	3	0.90	0.4525

Note: The denominator degrees of freedom for the F tests is 37.

Estimated Regression Coefficients				
Parameter	Estimate	Standard Error	t Value	Pr > t
Intercept	-26.086882	2.58771182	-10.08	<.0001
Income	0.776699	0.04567521	17.00	<.0001
Kids 1	0.888631	1.12799263	0.79	0.4358
Kids 2	1.545726	1.25598146	1.23	0.2262
Kids 3	-0.526817	1.42555453	-0.37	0.7138
Kids 4	0.000000	0.00000000	.	.

Note: The degrees of freedom for the t tests is 37.
 Matrix X'WX is singular and a generalized inverse was used to solve the normal equations.
 Estimates are not unique.

Output 122.9.3 prints the first 6 observation in the output data set JKWeights, which contains the replicate weights.

The data set JKWeights contains all the variable in the data set IceCream, in addition to the replicate weights variables named RepWt_1, RepWt_2, ..., RepWt_40.

For example, the first observation (student) from stratum Grade=7 is deleted to create the first replicate. Therefore, stratum Grade=7 is the donor stratum for the first replicate, and the corresponding replicate weights are saved in the variable RepWt_1.

Because the first observation is deleted in the first replicate, RepWt_1=0 for the first observation. For observations from strata other than the donor stratum Grade=7, their replicate weights remain the same as in the variable Weight, while the rest of the observations in stratum Grade=7 are multiplied by the reciprocal of the corresponding jackknife coefficient, 0.95 for the first replicate.

Output 122.9.3 The Jackknife Replicate Weights for the First 6 Observations**The Jackknife Weights for the First 6 Obs**

Obs	Grade	Spending	Income	Kids	Prob	Weight	RepWt_1	RepWt_2	RepWt_3	RepWt_4	RepWt_5
1	7	7	39	2	0.010965	91.200	0.000	96.000	91.200	91.200	96.000
2	7	7	38	1	0.010965	91.200	96.000	0.000	91.200	91.200	96.000
3	8	12	47	1	0.008780	113.889	113.889	113.889	0.000	113.889	113.889
4	9	10	47	4	0.009557	104.636	104.636	104.636	104.636	0.000	104.636
5	7	1	34	4	0.010965	91.200	96.000	96.000	91.200	91.200	0.000
6	7	10	43	2	0.010965	91.200	96.000	96.000	91.200	91.200	96.000

Obs	RepWt_6	RepWt_7	RepWt_8	RepWt_9	RepWt_10	RepWt_11	RepWt_12	RepWt_13	RepWt_14
1	96.000	96.000	91.200	91.200	96.000	96.000	91.200	91.200	96.000
2	96.000	96.000	91.200	91.200	96.000	96.000	91.200	91.200	96.000
3	113.889	113.889	128.125	128.125	113.889	113.889	113.889	128.125	113.889
4	104.636	104.636	104.636	104.636	104.636	104.636	115.100	104.636	104.636
5	96.000	96.000	91.200	91.200	96.000	96.000	91.200	91.200	96.000
6	0.000	96.000	91.200	91.200	96.000	96.000	91.200	91.200	96.000

Obs	RepWt_15	RepWt_16	RepWt_17	RepWt_18	RepWt_19	RepWt_20	RepWt_21	RepWt_22	RepWt_23
1	96.000	96.000	91.200	91.200	91.200	91.200	91.200	91.200	96.000
2	96.000	96.000	91.200	91.200	91.200	91.200	91.200	91.200	96.000
3	113.889	113.889	113.889	128.125	128.125	113.889	113.889	113.889	113.889
4	104.636	104.636	115.100	104.636	104.636	115.100	115.100	115.100	104.636
5	96.000	96.000	91.200	91.200	91.200	91.200	91.200	91.200	96.000
6	96.000	96.000	91.200	91.200	91.200	91.200	91.200	91.200	96.000

Obs	RepWt_24	RepWt_25	RepWt_26	RepWt_27	RepWt_28	RepWt_29	RepWt_30	RepWt_31	RepWt_32
1	96.000	96.000	91.200	91.200	91.200	96.000	96.000	96.000	96.000
2	96.000	96.000	91.200	91.200	91.200	96.000	96.000	96.000	96.000
3	113.889	113.889	113.889	128.125	113.889	113.889	113.889	113.889	113.889
4	104.636	104.636	115.100	104.636	115.100	104.636	104.636	104.636	104.636
5	96.000	96.000	91.200	91.200	91.200	96.000	96.000	96.000	96.000
6	96.000	96.000	91.200	91.200	91.200	96.000	96.000	96.000	96.000

Obs	RepWt_33	RepWt_34	RepWt_35	RepWt_36	RepWt_37	RepWt_38	RepWt_39	RepWt_40
1	91.200	91.200	91.200	96.000	91.200	91.200	96.000	96.000
2	91.200	91.200	91.200	96.000	91.200	91.200	96.000	96.000
3	113.889	128.125	128.125	113.889	113.889	113.889	113.889	113.889
4	115.100	104.636	104.636	104.636	115.100	115.100	104.636	104.636
5	91.200	91.200	91.200	96.000	91.200	91.200	96.000	96.000
6	91.200	91.200	91.200	96.000	91.200	91.200	96.000	96.000

References

Beaumont, J.-F., and Patak, Z. (2012). "On the Generalized Bootstrap for Sample Surveys with Special Attention to Poisson Sampling." *International Statistical Review* 80:127–148.

- Brick, J. M., and Kalton, G. (1996). "Handling Missing Data in Survey Research." *Statistical Methods in Medical Research* 5:215–238.
- Cochran, W. G. (1977). *Sampling Techniques*. 3rd ed. New York: John Wiley & Sons.
- Dippo, C. S., Fay, R. E., and Morganstein, D. H. (1984). "Computing Variances from Complex Samples with Replicate Weights." In *Proceedings of the Survey Research Methods Section*, 489–494. Alexandria, VA: American Statistical Association.
- Fay, R. E. (1984). "Some Properties of Estimates of Variance Based on Replication Methods." In *Proceedings of the Survey Research Methods Section*, 495–500. Alexandria, VA: American Statistical Association.
- Fay, R. E. (1989). "Theory and Application of Replicate Weighting for Variance Calculations." In *Proceedings of the Survey Research Methods Section*, 212–217. Alexandria, VA: American Statistical Association.
- Fuller, W. A. (1975). "Regression Analysis for Sample Survey." *Sankhyā, Series C* 37:117–132.
- Fuller, W. A. (2009). *Sampling Statistics*. Hoboken, NJ: John Wiley & Sons.
- Fuller, W. A., Kennedy, W. J., Schnell, D., Sullivan, G., and Park, H. J. (1989). *PC CARP*. Ames: Iowa State University Statistical Laboratory.
- Hidiroglou, M. A., Fuller, W. A., and Hickman, R. D. (1980). *SUPER CARP*. Ames: Iowa State University Statistical Laboratory.
- Judkins, D. R. (1990). "Fay's Method for Variance Estimation." *Journal of Official Statistics* 6:223–239.
- Kalton, G., and Kasprzyk, D. (1986). "The Treatment of Missing Survey Data." *Survey Methodology* 12:1–16.
- Kish, L. (1965). *Survey Sampling*. New York: John Wiley & Sons.
- Lohr, S. L. (2010). *Sampling: Design and Analysis*. 2nd ed. Boston: Brooks/Cole.
- Mashreghi, Z., Haziza, D., and Léger, C. (2016). "A Survey of Bootstrap Methods in Finite Population Sampling." *Statistics Surveys* 10:1–52.
- McCarthy, P. J., and Snowden, C. B. (1985). *The Bootstrap and Finite Population Sampling*. Vital and Health Statistics, Series 2, no. 95. DHHS Publication Number 85–1369. Washington, DC: US Government Printing Office. https://www.cdc.gov/nchs/data/series/sr_02/sr02_095.pdf.
- Pringle, R. M., and Rayner, A. A. (1971). *Generalized Inverse Matrices with Applications to Statistics*. New York: Hafner Publishing.
- Rao, J. N. K., and Shao, J. (1996). "On Balanced Half-Sample Variance Estimation in Stratified Random Sampling." *Journal of the American Statistical Association* 91:343–348.
- Rao, J. N. K., and Shao, J. (1999). "Modified Balanced Repeated Replication for Complex Survey Data." *Biometrika* 86:403–415.
- Rao, J. N. K., and Wu, C. F. J. (1988). "Resampling Inference with Complex Survey Data." *Journal of the American Statistical Association* 83:231–241.
- Rao, J. N. K., Wu, C. F. J., and Yue, K. (1992). "Some Recent Work on Resampling Methods for Complex Surveys." *Survey Methodology* 18:209–217.

- Rust, K. (1985). "Variance Estimation for Complex Estimators in Sample Surveys." *Journal of Official Statistics* 1:381–397.
- Särndal, C.-E., and Lundström, S. (2005). *Estimation in Surveys with Nonresponse*. Chichester, UK: John Wiley & Sons.
- Särndal, C.-E., Swensson, B., and Wretman, J. (1992). *Model Assisted Survey Sampling*. New York: Springer-Verlag.
- Shao, J., and Tu, D. (1995). *The Jackknife and Bootstrap*. New York: Springer-Verlag.
- Sitter, R. R. (1992a). "Comparing Three Bootstrap Methods for Survey Data." *Canadian Journal of Statistics* 20:135–154.
- Sitter, R. R. (1992b). "A Resampling Procedure for Complex Survey Data." *Journal of the American Statistical Association* 87:755–765.
- Wolter, K. M. (2007). *Introduction to Variance Estimation*. 2nd ed. New York: Springer.
- Woodruff, R. S. (1971). "A Simple Method for Approximating the Variance of a Complicated Estimate." *Journal of the American Statistical Association* 66:411–414.

Subject Index

- ADJRSQ
 - SURVEYREG procedure, 10112
- adjusted R-square
 - SURVEYREG procedure, 10124
- alpha level
 - SURVEYREG procedure, 10091, 10115
- analysis of variance
 - SURVEYREG procedure, 10123
- ANOVA
 - SURVEYREG procedure, 10112, 10123
- balanced repeated replication
 - SURVEYREG procedure, 10128
 - variance estimation (SURVEYREG), 10128
- Bootstrap
 - SURVEYREG procedure, 10126
- Bootstrap Method
 - variance estimation (SURVEYREG), 10126
- bootstrap replicate weights
 - SURVEYREG procedure, 10126
- Bootstrap variance estimation
 - SURVEYREG procedure, 10126
- BRR
 - SURVEYREG procedure, 10128
- BRR variance estimation
 - SURVEYREG procedure, 10128
- bubble plots
 - SURVEYREG procedure, 10092
- cluster sampling
 - SURVEYREG procedure, 10146
- clustering
 - SURVEYREG procedure, 10104
- computational details
 - SURVEYREG procedure, 10121
- computational resources
 - SURVEYREG procedure, 10134
- confidence level
 - SURVEYREG procedure, 10091
- confidence limits
 - SURVEYREG procedure, 10112
- contrasts
 - SURVEYREG procedure, 10104, 10133
- creating bootstrap replicates
 - SURVEYREG procedure, 10098
- degrees of freedom
 - SURVEYREG procedure, 10132
- design effects
 - SURVEYREG procedure, 10122
- design information, 10120
- domain analysis
 - SURVEYREG procedure, 10134, 10163, 10166
- domain means comparison
 - SURVEYREG procedure, 10166
- donor stratum
 - SURVEYREG procedure, 10130
- effect testing
 - SURVEYREG procedure, 10133
- Fay coefficient
 - SURVEYREG procedure, 10129
- Fay's BRR method
 - variance estimation (SURVEYREG), 10129
- finite population correction
 - SURVEYREG procedure, 10095, 10096, 10120
- fit plots
 - SURVEYREG procedure, 10092
- Hadamard matrix
 - SURVEYREG procedure, 10132
- heat map plots
 - SURVEYREG procedure, 10092
- initial seed
 - SURVEYREG procedure, 10099
- jackknife
 - SURVEYREG procedure, 10130
- jackknife coefficients
 - SURVEYREG procedure, 10130
 - SURVEYREG procedure, 10136
- jackknife variance estimation
 - SURVEYREG procedure, 10130
- linearization method
 - SURVEYREG procedure, 10125
- missing values
 - SURVEYREG procedure, 10091, 10119
- MSE
 - SURVEYREG procedure, 10124
- multiple R-square
 - SURVEYREG procedure, 10124
- number of replicates
 - SURVEYREG procedure, 10126, 10128–10130

- ODS graph names
 - SURVEYREG procedure, 10142
- ODS Graphics
 - SURVEYREG procedure, 10092, 10142
- ODS table names
 - SURVEYREG procedure, 10141
- options summary
 - ESTIMATE statement, 10108
- output data sets
 - SURVEYREG procedure, 10135
- output jackknife coefficient
 - SURVEYREG procedure, 10136
- output replicate weights
 - SURVEYREG procedure, 10136
- output table names
 - SURVEYREG procedure, 10141
- pooled stratum
 - SURVEYREG procedure, 10123
- primary sampling units (PSUs)
 - SURVEYREG procedure, 10121
- regression analysis
 - survey sampling, 10082
- regression coefficients
 - SURVEYREG procedure, 10122
- regression estimators
 - SURVEYREG procedure, 10149, 10156
- replicate weights
 - SURVEYREG procedure, 10125
- replication methods
 - SURVEYREG procedure, 10096
 - SURVEYREG procedure, 10125, 10172
- root MSE
 - SURVEYREG procedure, 10124
- sampling rates
 - SURVEYREG procedure, 10095, 10120
- sampling weights
 - SURVEYREG procedure, 10115, 10119
- seed
 - initial (SURVEYREG), 10099
- simple random sampling
 - SURVEYREG procedure, 10083, 10143
- singularity level
 - SURVEYREG procedure, 10105, 10113
- stratification
 - SURVEYREG procedure, 10117
- stratified sampling
 - SURVEYREG procedure, 10085, 10150
- stratum collapse
 - SURVEYREG procedure, 10123, 10159
- subdomain analysis, *see also* domain analysis
- subgroup analysis, *see also* domain analysis
- subpopulation analysis, *see also* domain analysis
- survey sampling, *see also* SURVEYREG procedure
 - regression analysis, 10082
- SURVEYREG procedure
 - balanced repeated replication, 10128
 - Bootstrap, 10126
 - bootstrap replicate weights, 10126
 - Bootstrap variance estimation, 10126
 - BRR, 10128
 - BRR variance estimation, 10128
 - clustering, 10104
 - creating bootstrap replicates, 10098
 - domain variable, 10106
 - donor stratum, 10130
 - Fay coefficient, 10129
 - Fay's BRR variance estimation, 10129
 - finite population correction, 10095, 10096, 10120
 - Hadamard matrix, 10132
 - initial seed, 10099
 - jackknife, 10130
 - jackknife coefficients, 10130
 - jackknife variance estimation, 10130
 - number of replicates, 10126, 10128–10130
 - ordering of effects, 10092
 - output replicate weights, 10136
 - population totals, 10096, 10120
 - primary sampling units (PSUs), 10121
 - replication methods, 10096
 - sampling rates, 10095, 10120
 - sampling weights, 10115, 10119
 - specify domain level, 10106
 - subset of domain levels, 10106
 - VARMETHOD=Bootstrap option, 10126
 - VARMETHOD=BRR option, 10128
 - VARMETHOD=JACKKNIFE option, 10130
 - VARMETHOD=JK option, 10130
 - weighting, 10115, 10119
- SURVEYREG procedure, 10082
 - ADJRSQ, 10112
 - adjusted R-square, 10124
 - alpha level, 10091, 10115
 - analysis of contrasts table, 10140
 - analysis of variance, 10123
 - ANOVA, 10112, 10123
 - ANOVA table, 10139
 - bubble plots, 10092
 - classification level table, 10139
 - cluster sampling, 10146
 - coefficients of contrast table, 10140
 - computational details, 10121
 - computational resources, 10134
 - confidence level, 10091
 - confidence limits, 10112
 - contrasts, 10104, 10133

- covariance of estimated regression coefficients table, 10140
- data summary table, 10137
- degrees of freedom, 10132
- design effects, 10122
- design summary table, 10137
- domain analysis, 10134, 10163, 10166
- domain means comparison, 10166
- domain summary table, 10137
- effect testing, 10133
- fit plots, 10092
- fit statistics table, 10137
- Hadamard matrix, 10141
- heat map plots, 10092
- inverse matrix of $X'X$, 10139
- jackknife coefficients, 10136
- linearization method, 10125
- list of strata, 10118
- missing values, 10091, 10119
- MSE, 10124
- multiple R-square, 10124
- ODS graph names, 10142
- ODS Graphics, 10092, 10142
- output data sets, 10088, 10135
- output jackknife coefficient, 10136
- output table names, 10141
- pooled stratum, 10123
- regression coefficients, 10122
- regression coefficients table, 10140
- regression estimators, 10149, 10156
- replicate weights, 10125
- replication methods, 10125, 10172
- root MSE, 10124
- simple random sampling, 10083, 10143
- singularity level, 10105, 10113
- stratification, 10117
- stratified sampling, 10085, 10150
- stratum collapse, 10123, 10159
- stratum information table, 10138
- subpopulation analysis, 10163, 10166
- Taylor series variance estimation, 10125
- testing effect, 10133
- tests of model effects table, 10139
- variance estimation, 10125
- variance estimation table, 10138
- Wald test, 10133
- $X'X$ matrix, 10139
- Bootstrap (SURVEYREG), 10126
- BRR (SURVEYREG), 10128
- jackknife (SURVEYREG), 10130
- SURVEYREG procedure, 10125
- Taylor series (SURVEYREG), 10125
- VARMETHOD=Bootstrap option
 - SURVEYREG procedure, 10126
- VARMETHOD=BRR option
 - SURVEYREG procedure, 10128
- VARMETHOD=JACKKNIFE option
 - SURVEYREG procedure, 10130
- VARMETHOD=JK option
 - SURVEYREG procedure, 10130
- Wald test
 - SURVEYREG procedure, 10133
- weighting
 - SURVEYREG procedure, 10115, 10119
- Taylor series variance estimation
 - SURVEYREG procedure, 10125
- testing effect
 - SURVEYREG procedure, 10133
- variance estimation

Syntax Index

- ADJRSQ option
 - MODEL statement (SURVEYREG), 10112
- ALPHA= option
 - OUTPUT statement (SURVEYREG), 10115
 - PROC SURVEYREG statement, 10091
- ANOVA option
 - MODEL statement (SURVEYREG), 10112
- BY statement
 - SURVEYREG procedure, 10102
- CENTER= option
 - VARMETHOD=BOOTSTRAP (PROC SURVEYREG statement), 10097
 - VARMETHOD=BRR (PROC SURVEYREG statement), 10099
 - VARMETHOD=JACKKNIFE (PROC SURVEYREG statement), 10101
- CLASS statement
 - SURVEYREG procedure, 10103
- CLPARM option
 - MODEL statement (SURVEYREG), 10112
- CLUSTER statement
 - SURVEYREG procedure, 10104
- CONTRAST statement
 - SURVEYREG procedure, 10104
- COVB option
 - MODEL statement (SURVEYREG), 10112
- DATA= option
 - PROC SURVEYREG statement, 10091
- DEFF option
 - MODEL statement (SURVEYREG), 10112
- DF= option
 - MODEL statement (SURVEYREG), 10112
 - REPWEIGHTS statement (SURVEYREG), 10115
- DOMAIN statement
 - SURVEYREG procedure, 10106
- E option
 - CONTRAST statement (SURVEYREG), 10105
- EFFECT statement
 - SURVEYREG procedure, 10107
- ESTIMATE statement
 - SURVEYREG procedure, 10108
- FAY= option
 - VARMETHOD=BRR (PROC SURVEYREG statement), 10099
- HADAMARD= option
 - VARMETHOD=BRR (PROC SURVEYREG statement), 10100
- INVERSE option
 - MODEL statement (SURVEYREG), 10112
- JKCOEFS= option
 - REPWEIGHTS statement (SURVEYREG), 10115
- keyword= option
 - OUTPUT statement (SURVEYREG), 10114
- LCLM keyword
 - OUTPUT statement (SURVEYREG), 10114
- LIST option
 - STRATA statement (SURVEYREG), 10118
- LSMESTIMATE statement
 - SURVEYREG procedure, 10110
- MH= method-option
 - PROC SURVEYREG statement, 10098
- MISSING option
 - PROC SURVEYREG statement, 10091
- MODEL statement
 - SURVEYREG procedure, 10111
- N= option
 - PROC SURVEYREG statement, 10096
- NAMELEN= option
 - PROC SURVEYREG statement, 10091
- NBINS= global plot option
 - PROC SURVEYREG statement, 10093
- NBINS= option
 - PROC SURVEYREG statement, 10094
- NOCOLLAPSE option
 - STRATA statement (SURVEYREG), 10118
- NOFILL option
 - CONTRAST statement (SURVEYREG), 10105
- NOINT option
 - MODEL statement (SURVEYREG), 10113
- NOMCAR option
 - PROC SURVEYREG statement, 10091
- ORDER= option
 - PROC SURVEYREG statement, 10092

OUT= option
 OUTPUT statement (SURVEYREG), 10114
 OUTJKCOEFS= option
 VARMETHOD=JACKKNIFE (PROC SURVEYREG statement), 10102
 OUTPUT statement
 SURVEYREG procedure, 10114
 OUTWEIGHTS= option
 VARMETHOD=BOOTSTRAP (PROC SURVEYREG statement), 10098
 VARMETHOD=BRR (PROC SURVEYREG statement), 10100
 VARMETHOD=JACKKNIFE (PROC SURVEYREG statement), 10102

 PARMLABEL option
 MODEL statement (SURVEYREG), 10113
 PLOTS= option
 PROC SURVEYREG statement, 10092
 PLOTS=FIT option
 PROC SURVEYREG statement, 10094
 PLOTS=FIT(NBINS=) option
 PROC SURVEYREG statement, 10094
 PREDICTED keyword
 OUTPUT statement (SURVEYREG), 10114
 PRINTH option
 VARMETHOD=BRR (PROC SURVEYREG statement), 10100
 PROC SURVEYREG statement, *see* SURVEYREG procedure

 R= option
 PROC SURVEYREG statement, 10095
 RATE= option
 PROC SURVEYREG statement, 10095
 REF= option
 CLASS statement (SURVEYREG), 10103
 REPCOEFS= option
 REPWEIGHTS statement (SURVEYREG), 10116
 REPS= option
 VARMETHOD=BOOTSTRAP (PROC SURVEYREG statement), 10099
 VARMETHOD=BRR (PROC SURVEYREG statement), 10101
 REPWEIGHTS statement
 SURVEYREG procedure, 10115
 RESIDUAL keyword
 OUTPUT statement (SURVEYREG), 10114

 SEED= method-option
 PROC SURVEYREG statement, 10099
 SHAPE= plot option
 PROC SURVEYREG statement, 10095
 SHAPE=HEXAGONAL option
 PROC SURVEYREG statement, 10095
 SHAPE=RECTANGULAR option
 PROC SURVEYREG statement, 10095
 SINGULAR= option
 CONTRAST statement (SURVEYREG), 10105
 MODEL statement (SURVEYREG), 10113
 SLICE statement
 SURVEYREG procedure, 10117
 SOLUTION option
 MODEL statement (SURVEYREG), 10113
 STB option
 MODEL statement (SURVEYREG), 10113
 STD keyword
 OUTPUT statement (SURVEYREG), 10114
 STDP keyword
 OUTPUT statement (SURVEYREG), 10114
 STORE statement
 SURVEYREG procedure, 10117
 STRATA statement
 SURVEYREG procedure, 10117
 SUBGROUP statement
 SURVEYREG procedure, 10106
 SURVEYREG procedure, BY statement, 10102
 SURVEYREG procedure, CLASS statement, 10103
 REF= option, 10103
 REF= variable option, 10103
 SURVEYREG procedure, CLUSTER statement, 10104
 SURVEYREG procedure, DOMAIN statement, 10106
 SURVEYREG procedure, EFFECT statement, 10107
 SURVEYREG procedure, ESTIMATE statement, 10108
 SURVEYREG procedure, LSMESTIMATE statement, 10110
 SURVEYREG procedure, PROC SURVEYREG statement
 CENTER= option
 (VARMETHOD=BOOTSTRAP), 10097
 CENTER= option (VARMETHOD=BRR), 10099
 CENTER= option
 (VARMETHOD=JACKKNIFE), 10101
 FAY= option (VARMETHOD=BRR), 10099
 HADAMARD= option (VARMETHOD=BRR), 10100
 M= method-option, 10098
 N= option, 10096
 ORDER= option, 10092
 OUTJKCOEFS= option
 (VARMETHOD=JACKKNIFE), 10102
 OUTWEIGHTS= option
 (VARMETHOD=BOOTSTRAP), 10098
 OUTWEIGHTS= option (VARMETHOD=BRR), 10100
 OUTWEIGHTS= option
 (VARMETHOD=JACKKNIFE), 10102

PRINTH option (VARMETHOD=BRR), 10100
 RATE= option, 10095
 REPS= option (VARMETHOD=BOOTSTRAP),
 10099
 REPS= option (VARMETHOD=BRR), 10101
 SEED= method-option, 10099
 TOTAL= option, 10096
 VARMETHOD= option, 10096
 VARMETHOD=BOOTSTRAP option, 10097
 VARMETHOD=BRR option, 10099
 VARMETHOD=JACKKNIFE option, 10101
 VARMETHOD=TAYLOR option, 10102
 SURVEYREG procedure, REPWEIGHTS statement,
 10115
 DF= option, 10115
 JKCOEFS= option, 10115
 REPCOEFS= option, 10116
 SURVEYREG procedure, SLICE statement, 10117
 SURVEYREG procedure, STORE statement, 10117
 SURVEYREG procedure, TEST statement, 10118
 SURVEYREG procedure, WEIGHT statement, 10119
 SURVEYREG procedure
 syntax, 10089
 SURVEYREG procedure, CONTRAST statement,
 10104
 E option, 10105
 NOFILL option, 10105
 SINGULAR= option, 10105
 SURVEYREG procedure, MODEL statement, 10111
 ADJRSQ option, 10112
 ANOVA option, 10112
 CLPARM option, 10112
 COVB option, 10112
 DEFF option, 10112
 INVERSE option, 10112
 NOINT option, 10113
 PARMLABEL option, 10113
 SINGULAR= option, 10113
 SOLUTION option, 10113
 STB option, 10113
 VADJUST= option, 10113
 XPX option, 10113
 SURVEYREG procedure, MODEL statement
 (SURVEYREG)
 DF= option, 10112
 SURVEYREG procedure, OUTPUT statement, 10114
 ALPHA= option, 10115
 keyword= option, 10114
 LCLM keyword, 10114
 OUT= option, 10114
 PREDICTED keyword, 10114
 RESIDUAL keyword, 10114
 STD keyword, 10114
 STDP keyword, 10114
 UCLM keyword, 10114
 SURVEYREG procedure, PROC SURVEYREG
 statement, 10090
 ALPHA= option, 10091
 DATA= option, 10091
 MISSING option, 10091
 NAMELEN= option, 10091
 NOMCAR option, 10091
 PLOTS= option, 10092
 PLOTS=FIT option, 10094
 TRUNCATE option, 10096
 SURVEYREG procedure, STRATA statement, 10117
 LIST option, 10118
 NOCOLLAPSE option, 10118
 TEST statement
 SURVEYREG procedure, 10118
 TRUNCATE option
 PROC SURVEYREG statement, 10096
 UCLM keyword
 OUTPUT statement (SURVEYREG), 10114
 VADJUST= option
 MODEL statement (SURVEYREG), 10113
 VARMETHOD= option
 PROC SURVEYREG statement, 10096
 VARMETHOD=BOOTSTRAP option
 PROC SURVEYREG statement, 10097
 VARMETHOD=BRR option
 PROC SURVEYREG statement, 10099
 VARMETHOD=JACKKNIFE option
 PROC SURVEYREG statement, 10101
 VARMETHOD=TAYLOR option
 PROC SURVEYREG statement, 10102
 WEIGHT statement
 SURVEYREG procedure, 10119
 WEIGHT= global plot option
 PROC SURVEYREG statement, 10094
 WEIGHT= plot option
 PROC SURVEYREG statement, 10095
 WEIGHT=BUBBLE option
 PROC SURVEYREG statement, 10094, 10095
 WEIGHT=HEATMAP option
 PROC SURVEYREG statement, 10094, 10095
 XPX option
 MODEL statement (SURVEYREG), 10113